

Surface Water Quality Monitoring Report for Christchurch City Waterways: January – December 2017

Dr Belinda Margetts
Christchurch City Council
Waterways Ecologist
Asset Planning - Water & Wastewater

Winsome Marshall
Environmental Consultant
Aquatic Ecology Limited

31 July 2018

Surface Water Quality Monitoring Report: January – December 2017

EXECUTIVE SUMMARY.....	VIII
1 INTRODUCTION & SAMPLING SITES	1
2 METHODS	7
2.1 Sample Collection and Testing	7
2.2 Stream Classifications for Guideline Levels	8
2.3 Water Quality Parameters and Guideline Levels.....	8
2.4 Data Analysis	11
2.4.1 Summary Statistics and Graphs	11
2.4.2 Temporal Trends Analysis.....	12
2.4.1 Water Quality Index.....	13
3 RESULTS: MONTHLY MONITORING	14
3.1 Rainfall	14
3.2 Water Quality Parameters	14
3.2.1 Dissolved Copper.....	15
3.2.2 Dissolved Lead	15
3.2.3 Dissolved Zinc.....	16
3.2.4 pH.....	16
3.2.5 Conductivity	16
3.2.6 TSS	17
3.2.7 Turbidity.....	17
3.2.1 Water Clarity (SLLT sites only)	18
3.2.2 DO.....	18
3.2.3 Water Temperature.....	18
3.2.4 BOD ₅	19
3.2.5 Total Ammonia.....	19
3.2.6 Nitrate, NNN and DIN.....	20
3.2.7 DRP.....	20
3.2.8 <i>E. coli</i>	21
3.3 Water Quality Index	31
4 RESULTS: WET WEATHER MONITORING	38
4.1 Rainfall	38
4.2 Water Quality Parameters	38
5 DISCUSSION.....	48

6	RECOMMENDATIONS.....	50
7	CONCLUSIONS.....	51
8	ACKNOWLEDGEMENTS.....	52
9	REFERENCES.....	53
	APPENDIX A: LABORATORY METHODS AND LIMITS OF DETECTION	57
	APPENDIX B: METAL HARDNESS MODIFIED TRIGGER VALUES.....	60
9.1	Ōtākaro/ Avon, Ōpāwaho/ Heathcote, Pūharakekenui/ Styx, Ōtūkaikino and Huritini/ Halswell River Catchments.....	60
9.2	Linwood Canal.....	63
	APPENDIX C: SAMPLING INSTIGATION AT EACH SITE.....	66
	APPENDIX D: MONTHLY MONITORING GRAPHS	67

Figures

Figure 1. Location of Christchurch City Council surface water quality monitoring sites	6
Figure 2. Average weekly rainfall at the Botanic Gardens in Hagley Park.....	14
Figure 3. NNN levels at the Ōtūkaikino Creek at Omaka Scout Camp site for the monitoring period October 2014 to December 2017.....	22
Figure 4. TSS levels at the Haytons Stream site for the monitoring period April 2007 to December 2017. Squares indicate individual sampling events.	22
Figure 5. Dissolved lead levels at the Halswell Retention Basin Outlet site for the monitoring period September 2014 to December 2017.	23
Figure 6. Dissolved copper levels at the Curletts Road Stream Upstream of Heathcote River site for the monitoring period January 2011 to December 2017.....	23
Figure 7. Dissolved lead levels at the Cashmere Stream at Worsleys Road site for the monitoring period January 2011 to December 2017.....	24
Figure 8. Dissolved lead levels at the Dudley Creek site for the monitoring period January 2011 to December 2017.....	24
Figure 9. Dissolved zinc levels at the Knights Stream site for the monitoring period May 2012 to December 2017.	25
Figure 10. BOD ₅ levels at the Knights Stream site for the monitoring period May 2012 to December 2017.	25
Figure 11. Water Quality Index (WQI) categories for 2017 at the Christchurch City Council water quality monitoring sites. No sites recorded a Very Poor or Excellent category.....	36
Figure 12. Boxplots of Water Quality Index for each catchment for the 2013 to 2017 monitoring years.....	37
Figure 13. Rainfall during the wet weather events of 12/07/2017 (blue line) and 14/08/2017 (purple line), with approximate times of sampling arrowed.....	38
Figure 14. Dissolved copper (top left), lead (top right) and zinc (bottom left) levels in water samples taken from the Ōtūkaikino River catchment during two rain events.....	40
Figure 15. pH (left) and conductivity (right) levels in water samples taken from the Huritini/Halswell River catchment during two rain events.	41
Figure 16. Total Suspended Solid (TSS; left) and turbidity (right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events.	42
Figure 17. Dissolved oxygen (left) and water temperature (right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events.	43
Figure 18. Biochemical Oxygen Demand (BOD ₅ ; left) and total ammonia (right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events.....	44

<i>Figure 19. Nitrate (top left), Nitrate Nitrite Nitrogen (NNN; top right) and Dissolved Inorganic Nitrogen (DIN; bottom left) levels in water samples taken from the Ōtūkaikino River catchment during two rain events.</i>	<i>45</i>
<i>Figure 20. Dissolved Reactive Phosphorus (DRP; left) and Escherichia coli (right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events.....</i>	<i>46</i>
<i>Figure 21. Total arsenic (left) and Total Petroleum Hydrocarbons (TPH; right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events.....</i>	<i>47</i>
<i>Figure i (a). Dissolved copper levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	<i>67</i>
<i>Figure i (b). Dissolved copper levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal (right graph) for the monitoring period January to December 2017.....</i>	<i>68</i>
<i>Figure ii (a). Dissolved lead levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	<i>69</i>
<i>Figure ii (b). Dissolved lead levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>70</i>
<i>Figure iii (a). Dissolved zinc levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	<i>71</i>
<i>Figure iii (b). Dissolved zinc levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>72</i>
<i>Figure iv (a). pH levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	<i>73</i>
<i>Figure iv (b). pH levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.</i>	<i>74</i>
<i>Figure iv (c). pH levels in water samples taken from the Pūharakekenui/ Styx River catchment by the Styx Living Laboratory Trust volunteers for the monitoring period January to December 2017 (n = 4 – 6 samples per site).</i>	<i>75</i>
<i>Figure v (a). Conductivity levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	<i>76</i>
<i>Figure v (b). Conductivity levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>77</i>

<i>Figure v (c). Conductivity levels in water samples taken from the Pūharakekenui/ Styx River catchment by the Styx Living Laboratory Trust volunteers for the monitoring period January to December 2017 (n = 4 – 6 samples per site).</i>	78
<i>Figure vi (a). Total Suspended Solid (TSS) levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	79
<i>Figure vi (b). Total Suspended Solid (TSS) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.</i>	80
<i>Figure vii (a) .Turbidity levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	81
<i>Figure vii (b). Turbidity levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.</i>	82
<i>Figure viii. Water clarity levels in water samples taken from the Pūharakekenui/ Styx River catchment by the Styx Living Laboratory Trust volunteers for the monitoring period January to December 2017 (n = 4 – 6 samples per site).</i>	83
<i>Figure ix (a). Dissolved oxygen levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	84
<i>Figure ix (b). Dissolved oxygen levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.</i>	85
<i>Figure x (a). Temperature of the water at the time of sampling at the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	86
<i>Figure x (b). Temperature of the water at the time of sampling at the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.</i>	87
<i>Figure x (c). Temperature of the water at the time of sampling by the Styx Living Laboratory Trust volunteers for the monitoring period January to December 2017 (n = 4 – 6 samples per site). Sites are ordered from upstream to downstream (left to right).</i>	88
<i>Figure xi (a). Biochemical Oxygen Demand (BOD₅) levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	89
<i>Figure xi (b). Biochemical Oxygen Demand (BOD₅) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.</i>	90
<i>Figure xii (a). Total ammonia levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	91

<i>Figure xii (b). Total ammonia levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>92</i>
<i>Figure xiii (a). Nitrate-nitrogen levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	<i>93</i>
<i>Figure xiii (b). Nitrate levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino Rivers (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>94</i>
<i>Figure xiv (a). Nitrate Nitrite Nitrogen (NNN) in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	<i>95</i>
<i>Figure xiv (b). Nitrate Nitrite Nitrogen (NNN) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>96</i>
<i>Figure xv (a). Dissolved Inorganic Nitrogen (DIN) levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.....</i>	<i>97</i>
<i>Figure xv (b). Dissolved Inorganic Nitrogen (DIN) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>98</i>
<i>Figure xvi (a). Dissolved Reactive Phosphorus (DRP) levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.....</i>	<i>99</i>
<i>Figure xvi (b). Dissolved Reactive Phosphorus (DRP) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>100</i>
<i>Figure xvii (a). Escherichia coli levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017.</i>	<i>101</i>
<i>Figure xvii (b). Escherichia coli levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017.....</i>	<i>102</i>

Tables

<i>Table 1. Christchurch City Council water quality monitoring sites required under the four Environment Canterbury (ECan) stormwater consents</i>	<i>2</i>
<i>Table 2. Parameters analysed in monthly and wet weather water samples taken in accordance with consenting requirements.....</i>	<i>8</i>

<i>Table 3. Number of waterway sites monitored for each parameter (where guideline levels are available), the number of samples analysed and the number of samples and sites (based on medians/95th percentiles, depending on the parameter) not meeting the guideline levels, during the monitoring period of January to December 2017.</i>	26
<i>Table 4a. Direction of significant trends ($p \leq 0.05$) for parameters monitored monthly at each of the sites in the Ōtākaro/ Avon River catchment (refer to Appendix C, Table i for sample periods).</i>	27
<i>Table 4b. Direction of significant trends ($p \leq 0.05$) for parameters monitored monthly at each of the sites in the Ōpāwaho/ Heathcote River catchment (refer to Appendix C, Table i for sample periods).</i>	28
<i>Table 4c. Direction of significant trends ($p \leq 0.05$) for parameters monitored monthly at each of the sites in the Huritini/ Halswell River catchment and Linwood Canal (refer to Appendix C, Table i for sample periods).</i>	29
<i>Table 4d. Direction of significant trends ($p \leq 0.05$) for parameters monitored monthly at each of the sites in the Pūharakekenui/ Styx and Ōtūkaikino River catchments (refer to Appendix C, Table i for sample periods).</i>	30
<i>Table 4e. Direction of significant trends ($p \leq 0.05$) for parameters monitored by the Styx Living Laboratory Trust.</i>	31
<i>Table i. Laboratory methods used over time to calculate parameter concentrations. N/A = Not Applicable.</i>	57
<i>Table i. Summary of the date of first monthly sampling at the 44 water quality monitoring sites. Dissolved metals were monitored from 2011, unless otherwise specified.</i>	66

Executive Summary

- This report summarises the results of the Christchurch City Council (CCC) surface water quality monitoring for the period January to December 2017, in accordance with the CCC Interim Global Stormwater Consent, South-West Stormwater Management Plan and the Styx Stormwater Management Plan.
- Monthly water samples were collected from 42 sites within the five major river catchments of Christchurch City (the Ōtākaro/ Avon, Ōpāwaho/ Heathcote, Huritini/ Halswell, Pūharakekenui/ Styx and Ōtūkaikino Rivers) and Linwood Canal, as well as two sites within Halswell Retention Basin. Wet weather monitoring was also conducted at the three monthly Ōtūkaikino River sites. Results of community monitoring at ten sites in the Pūharakekenui/ Styx River catchment by the Styx Living Laboratory Trust are also presented in this report.
- The water quality parameters specifically assessed in this report include metals (copper, lead and zinc), pH, conductivity, total suspended solids (TSS), turbidity, dissolved oxygen, temperature, biochemical oxygen demand (BOD₅), ammonia, nitrogen, phosphorus and *Escherichia coli* (as an indicator of pathogens).
- Over 13,000 tests were conducted for the monthly monitoring, with 7,335 of these allowing the assessment of each waterway site against relevant guideline levels. There were a number of parameters that were recorded at levels unlikely to cause adverse effects, including dissolved lead, pH, water temperature, total ammonia and nitrate. However, twenty percent of these samples did not meet the guideline level, with 98% of sites not meeting the guideline for at least one parameter. The contaminants of most concern were nitrogen, phosphorus and *E. coli*, as well as dissolved copper, dissolved zinc, TSS, turbidity, dissolved oxygen and BOD₅ at certain sites. The majority of parameters did not change in concentration over time, but there were some declines and improvements in water quality.
- The majority of waterways recorded a Water Quality Index (WQI) of 'poor' or 'fair'. The Ōtākaro/ Avon River and Pūharakekenui/ Styx River catchments recorded significant improvements in WQI over time, whereas the other catchments showed limited change. The Ōpāwaho/ Heathcote River catchment recorded the poorest water quality, and the worst site was Haytons Stream at Retention Basin, followed by Curletts Road Stream at Motorway and Curletts Road Stream Upstream of Heathcote River. The Ōtūkaikino River catchment recorded the best water quality, and the best site was tied between the Ōtūkaikino River at Groynes Inlet and Waimairi Stream.
- The wet weather monitoring in the Ōtūkaikino River catchment recorded much higher levels of copper, zinc, TSS, turbidity, BOD₅, ammonia, phosphorus and *E. coli* than the monthly monitoring. Wilsons Drain showed particularly high levels of contaminants.
- The results of this year's monitoring is largely consistent with that recorded in previous years, indicating that many of the waterways are historically and currently subjected to contamination, potentially from stormwater, waterfowl and other inputs. These contaminants may be having effects that include short-term and long-term adverse effects on biota, proliferation of aquatic plants and/or algae, human health risks from contact recreation, and deterioration of the aesthetics of the water column.
- The sites and parameters of concern in this report should be the focus of improved catchment management practices in Christchurch. Recommendations are made in the report for priority areas of focus.

1 Introduction & Sampling Sites

This report summarises the results of the Christchurch City Council (CCC) surface water quality monitoring for the period January to December 2017. This monitoring is in accordance with the requirements of the Interim Global Stormwater Consent (IGSC; CRC090292; Dewson & Rodrigo 2009), South-West Stormwater Management Plan (SMP) (CRC120223; Golder Associates 2012) and Styx SMP (CRC131249; Golder Associates 2013).

Monthly water samples were collected by CCC from 42 waterway sites: 41 sites within the five major river catchments of Christchurch City (the Ōtākaro/ Avon, Ōpāwaho/ Heathcote, Huritini/ Halswell, Pūharakekenui/ Styx and Ōtūkaikino Rivers), and one site in Linwood Canal (Table 1, Figure 1). Although not waterway sites, two sites within the Halswell Retention Basin (inlet and outlet) were also sampled. Six of the waterway sites were specifically chosen because they are located in proximity to stormwater outfalls¹. However, it should be noted that there are hundreds of outfalls throughout the catchments and many of the other sites are also located near stormwater discharge pipes.

The results of community monitoring at ten sites in the Pūharakekenui/ Styx River catchment by the Styx Living Laboratory Trust (SLLT)² are also presented in this report (Table 1, Figure 1). In addition, the Ōtūkaikino River catchment was monitored by the CCC during two wet weather occasions, at all three monthly monitoring sites (Ōtūkaikino River at Omaka Scout Camp, Ōtūkaikino River at the Groynes and Wilsons Drain).

¹ Avon River at Carlton Mill Corner, Avon River at Avondale Road, Heathcote River at Catherine Street, Heathcote River at Mackenzie Avenue, Haytons Stream at Retention Basin, Curletts Road Stream at Southern Motorway

² More information about this community group, including their monitoring programme, can be found at <https://www.thestyx.org.nz/styx-living-laboratory-trust>

Table 1. Christchurch City Council water quality monitoring sites required under the four Environment Canterbury (ECan) stormwater consents

Catchment	Site ID	Site	Easting (NZTM)	Northing (NZTM)	ECan Consent	LWRP or WRRP Classification
Ōtākaro/ Avon	AVON01	Avon River at Pages/Seaview Bridge ³	1577484	5182589	IGSC	Spring-fed – plains – urban (LWRP)
	AVON02	Avon River at Bridge Street ³	1577691	5180813	IGSC	Spring-fed – plains – urban (LWRP)
	AVON03	Avon River at Dallington Terrace/Gayhurst Road ³	1573560	5181210	IGSC	Spring-fed – plains – urban (LWRP)
	AVON04	Avon River at Manchester Street	1570890	5180481	IGSC	Spring-fed – plains – urban (LWRP)
	AVON05	Wairarapa Stream	1568250	5181303	IGSC	Spring-fed – plains – urban (LWRP)
	AVON06	Waimairi Stream	1568233	5181172	IGSC	Spring-fed – plains – urban (LWRP)
	AVON07	Avon River at Mona Vale	1568334	5181046	IGSC	Spring-fed – plains – urban (LWRP)
	AVON08	Riccarton Main Drain	1568683	5180019	IGSC	Spring-fed – plains – urban (LWRP)
	AVON09	Addington Brook	1569427	5179826	IGSC	Spring-fed – plains – urban (LWRP)
	AVON10	Dudley Creek	1572574	5182150	IGSC	Spring-fed – plains – urban (LWRP)
	AVON11	Horseshoe Lake Discharge ³	1574342	5183294	IGSC	Spring-fed – plains – urban (LWRP)
	AVON12	Avon River at Carlton Mill Corner ⁴	1569737	5181259	IGSC	Spring-fed – plains – urban (LWRP)
	AVON13	Avon River at Avondale Road ^{3,4}	1574752	5183557	IGSC	Spring-fed – plains – urban (LWRP)

IGSC = Interim Global Stormwater Consent; SMP = Stormwater Management Plan; LWRP = Land & Water Regional Plan; WRRP = Waimakariri River Regional Plan; SLLT = Styx Living Laboratory Trust.

³ Tidally influenced site

⁴ These sites are specifically located in proximity to stormwater outfalls

Catchment	Site ID	Site	Easting (NZTM)	Northing (NZTM)	ECan Consent	LWRP or WRRP Classification
Ōpāwaho/ Heathcote	HEATH01	Heathcote River at Ferrymead Bridge ³	1576491	5177150	IGSC	Spring-fed – plains – urban (LWRP)
	HEATH02	Heathcote River at Tunnel Road ³	1575074	5177543	IGSC	Spring-fed – plains – urban (LWRP)
	HEATH03	Heathcote River at Opawa Road/Clarendon Terrace ³	1573071	5177615	IGSC	Spring-fed – plains – urban (LWRP)
	HEATH04	Heathcote River at Bowenvale Avenue	1571198	5175780	IGSC	Spring-fed – plains – urban (LWRP)
	HEATH05	Cashmere Stream at Worsleys Road	1569030	5175155	South-West SMP	Banks Peninsula (LWRP)
	HEATH06	Heathcote River at Rose Street	1568701	5175918	South-West SMP	Spring-fed – plains – urban (LWRP)
	HEATH07	Heathcote River at Ferniehurst Street	1569157	5175612	South-West SMP	Spring-fed – plains – urban (LWRP)
	HEATH08	Heathcote River at Templetons Road	1565915	5176897	South-West SMP	Spring-fed – plains – urban (LWRP)
	HEATH09	Haytons Stream at Retention Basin ⁴	1566020	5177596	South-West SMP	Spring-fed – plains – urban (LWRP)
	HEATH10	Curletts Road Stream Upstream of Heathcote River Confluence	1566928	5177711	IGSC	Spring-fed – plains – urban (LWRP)
	HEATH11	Heathcote River at Catherine Street ⁴	1574413	5177883	IGSC	Spring-fed – plains – urban (LWRP)
	HEATH12	Heathcote River at Mackenzie Avenue Footbridge ⁴	1573520	5177917	IGSC	Spring-fed – plains – urban (LWRP)
	HEATH14	Curletts Road Stream at Southern Motorway ⁴	1566405	5178358	IGSC	Spring-fed – plains – urban (LWRP)
	HEATH16	Cashmere Stream at Sutherlands Road	1566086	5173988	South-West SMP	Not classified ⁵

⁵ But considered in this report a Banks Peninsula waterway, as per the lower reaches

Catchment	Site ID	Site	Easting (NZTM)	Northing (NZTM)	ECan Consent	LWRP or WRRP Classification
Pūharakekenui / Styx	STYX01	Smacks Creek at Gardiners Road near Styx Mill Road	1566804	5187956	Styx SMP	Unclassified ⁶
	STYX02	Styx River at Gardiners Road	1566790	5187226	Styx SMP	Unclassified ⁶
	STYX03	Styx River at Main North Road	1569066	5187219	Styx SMP	Unclassified ⁶
	STYX04	Kā Pūtahi ⁷ Creek at Blakes Road	1570401	5188030	Styx SMP	Unclassified ⁶
	STYX05	Kā Pūtahi ⁷ Creek at Belfast Road	1572194	5188267	Styx SMP	Unclassified ⁶
	STYX06	Styx River at Marshland Road Bridge	1572358	5187778	Styx SMP	Unclassified ⁶
	STYX07	Styx River at Richards Bridge	1573975	5189640	Styx SMP	Unclassified ⁶
	STYX08	Styx River at Harbour Road Bridge ³	1574998	5194749	Styx SMP	Unclassified ⁶
Huritini/ Halswell	HALS01	Halswell Retention Basin Inlet	1561701	5177022	IGSC	Not relevant
	HALS02	Halswell Retention Basin Outlet	1561796	5176914	IGSC	Not relevant
	HALS03	Nottingham Stream at Candys Road	1564532	5173080	South-West SMP	Spring-fed – plains (LWRP)
	HALS04	Halswell River at Akaroa Highway	1564446	5171721	South-West SMP	Spring-fed – plains (LWRP)
	HALS05	Knights Stream at Sabys Road	1563723	5172852	South-West SMP	Spring-fed – plains (LWRP)
Ōtūkaikino	OTUKAI01	Ōtūkaikino River at Groynes Inlet*	1567878	5188869	IGSC	OTU/GROYNES (WRRP)
	OTUKAI02	Wilson's Drain at Main North Road*	1571241	5190793	Styx SMP	WAIM-TRIB (WRRP)
	OTUKAI03	Ōtūkaikino Creek at Omaka Scout Camp*	1565664	5188038	IGSC	OTU/GROYNES (WRRP)
Linwood	OUT01	Linwood Canal/City Outfall Drain ³	1575952	5178026	IGSC	Unclassified ⁸

⁶ These waterways were originally classified as WAIM-TRIB in the WRRP, but an amendment was made for this catchment to be covered by the NRRP (where the waterways were classified 'spring-fed - plains'). The LWRP may be amended in the future to be in line with the now inoperative NRRP (Michele Stevenson, Environment Canterbury, personal communication). Therefore, these locations are considered as 'spring-fed - plains' in this report. This is a conservative approach, as the standards for 'spring-fed - plains' in the LWRP are more stringent than the standards for WAIM-TRIB in the WRRP.

⁷ While officially shown on maps as Kaputone Creek, CCC has recently endorsed the use of the original Māori name for the area, Kā Pūtahi Creek.

⁸ It is considered that 'spring-fed – plains – urban' is the most appropriate classification for this waterway under the LWRP

Catchment	Site ID	Site	Easting (NZTM)	Northing (NZTM)	ECan Consent	LWRP or WRRP Classification
Pūharakekenui / Styx (SLLT sites)	N/A	Smacks Creek Conservation Reserve	1566844	5187922	N/A	Unclassified ⁶
	N/A	Styx River at Willowbank	1567218	5187641	N/A	Unclassified ⁶
	N/A	Styx River at Styx Mill Conservation Reserve	1567918	5187613	N/A	Unclassified ⁶
	N/A	Styx River at Redwood Springs Site 1 (upstream of railway tracks)	1569476	5187556	N/A	Unclassified ⁶
	N/A	Styx River at Redwood Springs Site 2 (downstream of railway tracks)	1569526	5187524	N/A	Unclassified ⁶
	N/A	Styx River at Redwood Springs Site 3 (opposite Riverwood Boulevard)	1569974	5187629	N/A	Unclassified ⁶
	N/A	Styx River at Radcliffe Road	1571720	5187413	N/A	Unclassified ⁶
	N/A	Kā Pūtahi Creek at Ouruhia Domain	1571771	5190129	N/A	Unclassified ⁶
	N/A	Kā Pūtahi Creek at Everglades Golf Course	1571798	5189270	N/A	Unclassified ⁶
	N/A	Styx River at Brooklands	1575110	5193308	N/A	Unclassified ⁶

* These sites were also monitored during the two wet weather events

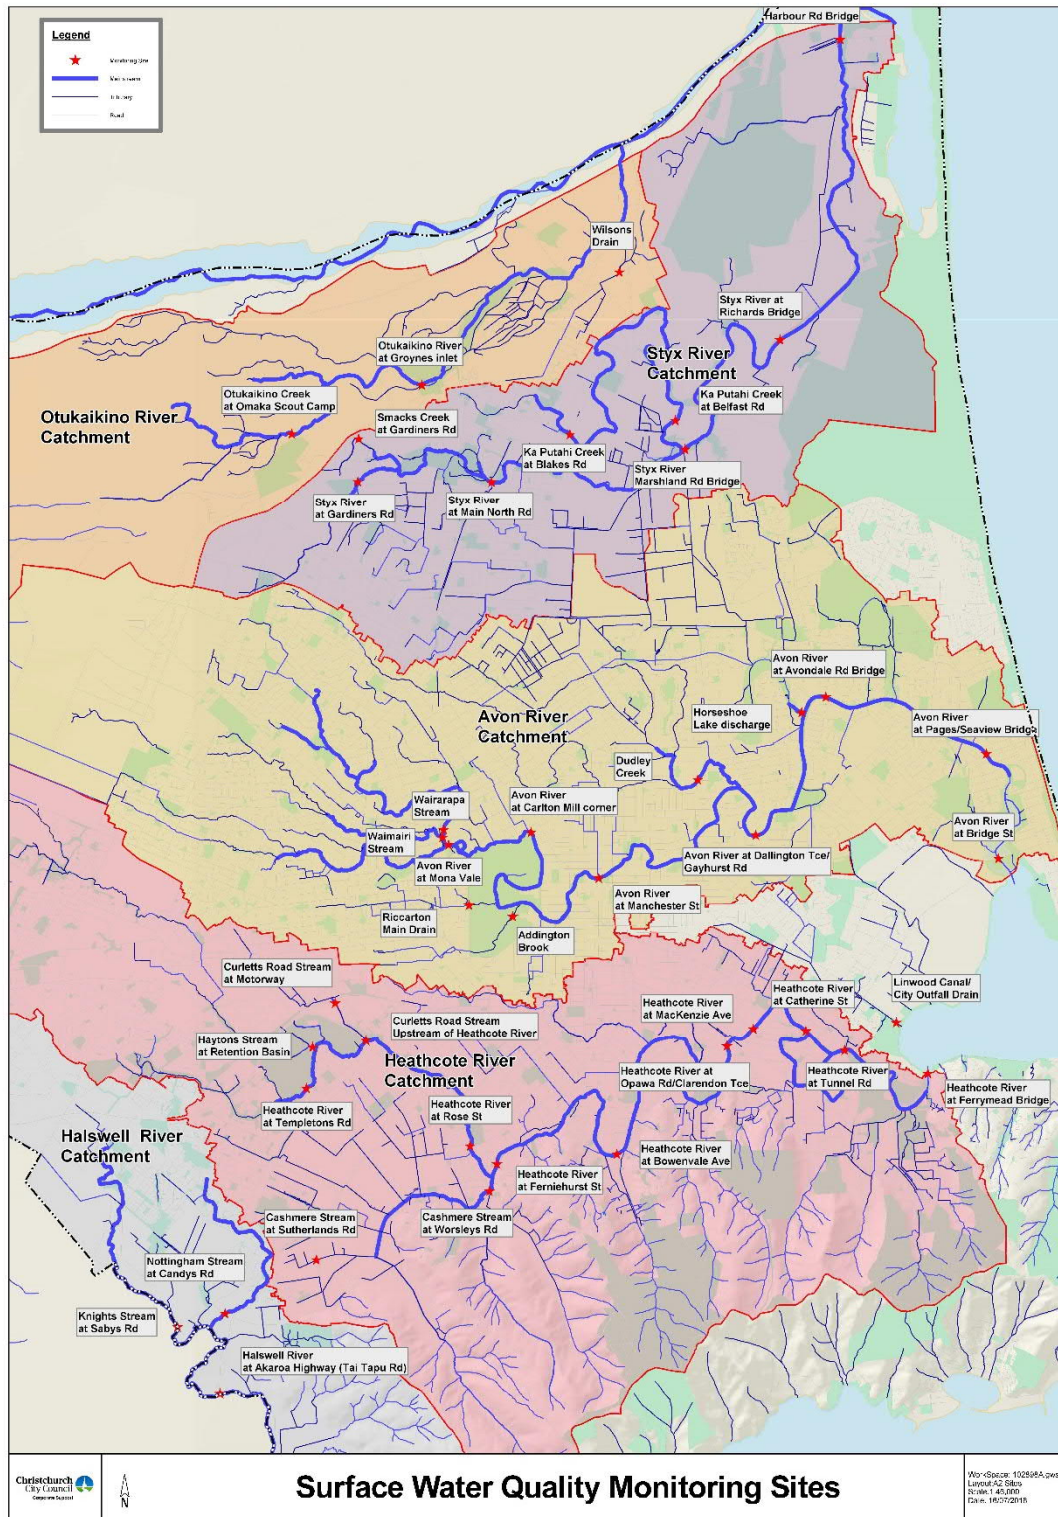


Figure 1. Location of Christchurch City Council surface water quality monitoring sites

2 Methods

2.1 Sample Collection and Testing

CCC monthly samples were collected predominantly via grab sampling, with field testing of temperature and oxygen using a hand-held meter (YSI Pro ODO meter). During the 2017 monitoring year, the following monthly monitoring was unable to be carried out:

- Heathcote River at Templetons Road site from January – July, as the site was dry
- Nottingham Stream at Candys Road in February, as there was not enough water to take a sample
- Ōtūkaikino Creek at Omaka Scout Camp site from January – February, as the gate for access was inadvertently locked during this time
- Styx River at Gardiners Road site in September, as roadworks prevented access to the site

SLLT volunteers have analysed water in the field for pH (Eutech pH pocket testers 30), conductivity (Eutech Cybernetics TDScan 3), water clarity (clarity tube) and water temperature (glass spirit thermometer) since 2004. Samples were aimed to be taken every third Saturday of the month, but as this was based on volunteer availability, the number of samples taken annually at each site ranged from 4 – 14. Of note:

- There was no data available for 2016
- 2015 and 2017 had a small number of recordings
- pH readings changed from using test strips to a handheld meter in February 2010; therefore, pH data prior to this time have been excluded from this report

The wet weather samples from the Ōtūkaikino River catchment were collected on the 12th of July and 14th of August 2017. Samples were collected via grab sampling, and field testing of temperature and oxygen using a hand-held meter (YSI Pro ODO meter). Wet weather events were required to meet the following criteria:

- Minimum of a three day dry period prior to sampling¹⁰
- Minimum of 5 mm total rainfall depth¹¹
- Catching of the “First Flush” (considered to be up to the first 15-25mm; Christchurch City Council, 2003), by sampling within 1 – 2 hours of the desired rainfall depth being achieved

The CCC monthly and wet weather samples were analysed at the CCC International Accreditation New Zealand (IANZ) laboratory for the parameters outlined in Table 2 (except for those measured in the field). Not all parameters were tested at all sites, and only the most pertinent parameters (typically with guideline levels) are analysed and discussed in this report. The methods used to analyse each parameter, including laboratory Limits of Detection (LOD), are presented in Table i in Appendix A. Some of these methods have changed over time, as more advanced equipment has become available, and timeframes for changes are detailed in this table.

¹⁰ On advice from Dr Aisling O’Sullivan (University of Canterbury) that even 24 hours is sufficient time for contaminants to accumulate

¹¹ Based on modelling by Peter Christensen (CCC) for Avon SMP that shows this is a ‘typical’ Christchurch storm event

Table 2. Parameters analysed in monthly and wet weather water samples taken in accordance with consenting requirements

Parameter	Units of Measurement
Total ammonia (ammoniacal nitrogen)	mg/L
Total arsenic*	mg/L
Biochemical Oxygen Demand (BOD ₅)	mg/L
Conductivity	µS/cm
Total and dissolved copper	mg/L
Dissolved Oxygen (DO)	mg/L and % saturation
Enterococci	MPN/100ml
<i>Escherichia coli</i>	CFU/100ml
Total water hardness	g/m ³ as calcium carbonate
Total and dissolved lead	mg/L
Nitrate nitrogen	mg/L
Nitrite nitrogen	mg/L
Nitrate Nitrite Nitrogen (NNN)	mg/L
Dissolved Inorganic Nitrogen (DIN)	mg/L
pH	
Dissolved Reactive Phosphorus (DRP)	mg/L
Total Petroleum Hydrocarbons*	mg/L
Total phosphorus	mg/L
Total Suspended Solids (TSS)	mg/L
Water temperature	°C
Total nitrogen	mg/L
Turbidity	NTU
Total and dissolved zinc	mg/L

* Wet weather samples only

2.2 Stream Classifications for Guideline Levels

The classification of each waterway site with respect to the Environment Canterbury (ECan) Land and Water Regional Plan (LWRP; Environment Canterbury, 2017) and the Waimakariri River Regional Plan (WRRP; Environment Canterbury, 2011) are shown in Table 1. These classifications determine the relevant guideline levels for each of the measured parameters for the various sites.

The WRRP does not have guideline levels for a number of the parameters analysed in this report. It was considered most appropriate in these cases, given these sites are all within the Ōtūkaikino River catchment, that the LWRP 'spring-fed – plains' guidelines be used. The two stormwater basin sites (Halswell Retention Basin Inlet and Outlet) are not classified as waterways and therefore are not compared to receiving water guidelines in this report.

2.3 Water Quality Parameters and Guideline Levels

Metals, in particular, *copper*, *lead* and *zinc*, can be toxic to aquatic organisms, negatively affecting fecundity, maturation, respiration, physical structure and behaviour (Harding, 2005). The toxicity of metals in freshwater, and therefore the risk of adverse biological effects, alters depending on the hardness, pH and alkalinity of the water (ANZECC, 2000). Therefore, trigger levels should be calculated with consideration of water hardness (ANZECC, 2000). CCC has previously calculated Hardness Modified Trigger Values (HMTV) for metals that are monitored monthly (copper, lead and zinc), in accordance with ANZECC (2000) methodology (see Appendix B). These values are therefore used in this monitoring report. Total *arsenic* is also monitored during the wet

weather sampling, but given this limited monitoring, the default (i.e. not hardness modified) ANZECC (2000) trigger value for arsenic (V) of 0.024 mg/L is used.

pH is a measure of acidity or alkalinity, on a scale from 0 to 14; a pH value of seven is neutral, less than seven is acidic and greater than seven is alkaline. Appropriate pH levels are essential for the physiological functions of biota, such as respiration and excretion (Environment Canterbury, 2009). Aquatic species typically have tolerances for certain pH levels and alteration of pH can result in changes in the composition of fish and invertebrate communities, with generally a positive relationship between pH and the number of species present (Collier et al. 1990). The guidelines in the LWRP for all waterways are a lower limit of 6.5 and an upper limit of 8.5. The WRRP, which covers the Ōtūkaikino River catchment sites in this report, does not detail a guideline level.

Conductivity is a measure of how well water conducts an electrical current. Pure water has very low conductivity, but dissolved ions in the water (e.g. contaminants such as metals and nutrients) increase conductivity. Traditionally, conductivity has been compared to the guideline value of <175 $\mu\text{S}/\text{cm}$ recommended by Biggs (1988) to avoid excessive periphyton growth. However, this guideline may be less relevant in urban waterways, where other contaminants that will not encourage periphyton growth may be contributing to high conductivity, such as metals. It is also noted that ECan do not consider this guideline value is useful, due to natural variations in levels (Abigail Bartram, ECan, personal communication 2013). They instead consider that analysis of trends is more useful, which is the approach adopted in this report.

Elevated levels of suspended sediment (*Total Suspended Solids*, TSS) in the water column decrease the clarity of the water and can adversely affect aquatic plants, invertebrates and fish (Crowe & Hay, 2004; Ryan, 1991). For example, sediment can affect photosynthesis of plants and therefore primary productivity within streams, interfere with feeding through the smothering of food supply, and can clog suitable habitat for species (Crowe & Hay, 2004; Ryan, 1991). The LWRP details in Rule 5.95 standards for TSS in stormwater prior to discharge, but does not detail specifically a guideline value within waterways (Environment Canterbury, 2017). The WRRP also does not detail a guideline level. A guideline level of 25 mg/L is considered an appropriate threshold to prevent detriment effects on biota (Hayward et al., 2009; Stevenson et al., 2010) and is therefore used in this report.

Turbidity is a measure of the transmission of light through water. Suspended matter in the water column causes light to be scattered or absorbed as it travels through the water. As for TSS, turbidity decreases the clarity of the water and can negatively affect stream biota (Ryan, 1991). A guideline level for this parameter is not provided in the LWRP or the WRRP. ANZECC (2000) provides a guideline of 5.6 Nephelometric Turbidity Units (NTU) for lowland rivers, which is used in this report.

Water clarity was used by the SLLT as a proxy for turbidity and TSS loads. ANZECC (2000) provides a guideline of 80 cm for lowland rivers.

Dissolved Oxygen (DO) is the concentration of oxygen dissolved or freely available in water and is commonly expressed as percent saturation. Adequate DO levels are essential for aquatic animals, such as fish and invertebrates, and can be influenced by many factors, including temperature, velocity, decomposition of organic material, and the photosynthesis and respiration of aquatic plants. The LWRP details a minimum DO level of 70% for 'spring-fed – plains' and 'spring-fed – plains – urban' waterways, and 90% for Banks Peninsula waterways (i.e. Cashmere Stream in this monitoring report). The

WRRP details a minimum of 80% for the waterways relevant to this monitoring report (i.e. Ōtūkaikino River catchment).

High *water temperature* can affect aquatic biota, with some studies showing that the presence of sensitive macroinvertebrates decreases with increasing temperature (Wahl et al., 2013). The LWRP water quality standard for temperature is a maximum of 20°C for all waterway classifications; the WRRP details a maximum of 25°C for the waterways relevant to this monitoring report (i.e. Ōtūkaikino River catchment).

Biochemical Oxygen Demand (BOD₅) is an indicator of the amount of biodegradable organic material in the water and the amount of oxygen required by bacteria to break down this material. High BOD₅ values are due to plant matter, nitrogen and phosphorus, and indicate the potential for bacteria to deplete oxygen levels in the water. The LWRP does not have a guideline level for this parameter. The WRRP and the Ministry for the Environment (1992) guideline level is 2 mg/L, which is the value used in this report.

Total ammonia (ammoniacal nitrogen) is typically a minor component of the nitrogen available for plant growth, but at high levels can have toxic effects on aquatic ecosystems. The toxicity of ammonia varies with pH (ANZECC, 2000). Therefore, the LWRP water quality standards also vary depending on pH, ranging from 2.57 mg/L at pH 6 to 0.18 mg/L at pH 9 (Environment Canterbury, 2017). For this report, the water quality standard (for both monthly and wet weather sampling) was adjusted based on the median pH levels from monthly sampling for the relevant catchments. The exception to this is for Banks Peninsula waterways (i.e. Cashmere Stream in this monitoring report), that have a set guideline value regardless of pH (0.32 mg/L). The WRRP does not have a guideline level.

Nitrate can be toxic to stream biota at high concentrations (Hickey, 2013). Guidelines are available for different species protection levels: 99% (pristine environment with high biodiversity and conservation values), 95% (environments which are subject to a range of disturbances from human activities, but with minor effects), 90% (environments which have naturally seasonally elevated concentrations for significant periods of the year (1-3 months)), 80% (environments which are measurably degraded and which have seasonally elevated concentrations for significant periods of the year (1-3 months)), and acute (environments which are significantly degraded; probable chronic effects on multiple species) (Hickey, 2013). Based on these descriptions and the predominantly urban nature of the waterways monitored, most of the waterways in this report would fall under the 80% to acute species description (i.e. Ōtākaro/ Avon, Ōpāwaho/ Heathcote and Huritini/ Halswell River catchments). However, the Pūharakekenui/ Styx and Ōtūkaikino River catchments (and Cashmere Stream) likely fall under the 90% species protection; these catchments have much better water quality, but exceed some of the receiving water quality guidelines throughout the year. To be conservative, the 90% species protection was chosen as the guideline level for all waterways in this report. Within this 90% level of species protection there are two guideline values: the 'grading' guideline (3.8 mg N/L) that provides for ecosystem protection for average long-term exposure (measured against medians) and the 'surveillance' guideline (5.6 mg N/L) that assesses seasonal maximum concentrations (measured against annual 95th percentiles). Both guideline levels have been assessed in this report to investigate both long-term and short-term effects. It is also noted that Schedule 8 (region-wide water quality limits) of ECan's LWRP gives a nitrate toxicity limit for lowland streams of 3.8 mg N/L (measured against annual median).

Elevated concentrations of *Nitrate and Nitrite Nitrogen* (NNN) can lead to proliferation of algae and aquatic plants (i.e., eutrophication), because nitrate and nitrite are oxidised forms of nitrogen that are readily available to plants. Eutrophication occurs at much lower nitrate concentrations than toxicity. The LWRP and the WRRP do not have a guideline value for this parameter, but the ANZECC (2000) water quality guidelines provide a trigger value of 0.444 mg/L for lowland rivers to avoid excessive plant growth. Note that this guideline is based on the 80th percentile of measurements from three lowland reference sites, so it is not “effects-based”. Rather, compliance with the guideline indicates the risk of eutrophication is relatively low. Compliance with NNN guidelines will also protect against nitrate toxicity.

Dissolved Inorganic Nitrogen (DIN), which is the sum of ammonia, nitrite and nitrate, provides a similar measure of eutrophication risk to NNN. The LWRP details a DIN value of 1.5 mg/L for 'spring-fed – plains' and 'spring-fed – plains – urban' waterways, and 0.09 mg/L for Banks Peninsula waterways. The DIN guideline of 1.5 mg/L is based on the median of Canterbury Spring-fed plains streams, whereas the 0.09 mg/L guideline is derived from the New Zealand Periphyton Guideline, based on flow data from Canterbury streams (Biggs, 2000; Hayward et al., 2009). There is no DIN guideline value in the WRRP.

Dissolved Reactive Phosphorus (DRP) is a soluble form of phosphorus that is readily available for use by plants. Phosphorus is an essential nutrient for plant growth and can limit primary production at low levels, but can cause eutrophication at high levels. The guideline levels in the LWRP for 'spring-fed - plains' and 'spring-fed – plains – urban' waterways are 0.016 mg/L, and 0.025 mg/L for Banks Peninsula waterways. There is no guideline value for this parameter in the WRRP.

Escherichia coli is a bacterium that is commonly used as an indicator of faecal contamination in freshwater and therefore health risk from contact recreation (Ministry for the Environment, 2003). The guideline level in the LWRP for 'spring-fed – plains', 'spring-fed – plains – urban' and Banks Peninsula waterways is 550 *E. coli* per 100ml (for 95% of samples). The WRRP does not have a guideline value for this parameter.

Total petroleum hydrocarbon (TPH) is the term used to describe a wide variety of chemical compounds that are found in oil and petroleum-based products. Some of the hydrocarbons found in petroleum products are toxic to aquatic life. In addition, hydrocarbons are broken down by microbial activity that then reduces oxygen levels in the water, which can also be harmful to sensitive fish and invertebrate species (ANZECC 2000). There are no guidelines for TPH in New Zealand freshwaters.

2.4 Data Analysis

2.4.1 Summary Statistics and Graphs

Boxplots (for monthly data) and bar graphs (for wet weather data) were produced using IBM® SPSS® Statistics 23. To allow statistical analyses of monthly samples, values less than the LOD were converted to half the detection limit. In some years, monthly *E.coli* levels exceeded the maximum laboratory limit for counting (24,000 CFU/100ml) and were analysed as 24,000, although levels may have been much higher than this. There was one such *E. coli* case during the 2017 monitoring year.

The dark lines in the boxes of the boxplots represent the medians, and the bottom and top lines of the boxes represent the 25th and 75th percentiles (the interquartile range), respectively. The T-bars that extend from the boxes approximate the location of 95% of the data (i.e. the 95th percentile). Circles represent statistical outliers and stars represent extreme outliers. In some cases, boxplots do not show all components, such as the percentiles, due to a lack of variation in the data, with some showing only the medians. This usually occurred where a large proportion of the data were below the laboratory limit of detection.

In line with the respective guideline documents and ECan guidance (Dr Lesley Bolton-Ritchie, Environment Canterbury, 6th April 2016, personal communication), the monthly data were compared to guideline levels using median levels. The exceptions being for *E. coli*, toxicants (metals and ammonia) and the 'surveillance' nitrate level, which were compared to the 95th percentiles.

2.4.2 Temporal Trends Analysis

Temporal trends analysis was carried out on the monthly data from each of the sites, to determine whether water quality is declining, improving or staying the same over time. Some of the sites have been monitored for longer periods than others, as detailed in Appendix C, Table i. Dissolved metals have only been analysed since 2011, with total metals sampled prior to this. Dissolved metals are now considered to be more relevant because they constitute the bio-available proportion of metals that can have adverse effects on biota (ANZECC, 2000). The guidelines also essentially pertain to dissolved metal concentrations, not total metals. As NNN is predominantly comprised of nitrate, trends analysis was also only conducted on NNN and not nitrate as well.

Trends analysis was conducted using Time Trends (NIWA, 2014). The Seasonal Kendall trend test was used to test the significance, magnitude and direction of the trends, providing an average annual percentage change. This software requires three years of data and all sites met this requirement. However, the missing data in the SLLT monitoring over some of the years may make these analyses less accurate.

Concentrations of parameters may vary depending on flow rates at the time of sampling, due to variations in the level of dilution. Therefore, flow-adjusted data can be used in the Time Trends software to account for this potentially confounding factor. Flow adjustment was only undertaken at the one site where a flow recorder was directly present (Heathcote River at Ferniehurst Street). It is considered that extrapolation of this flow data to other locations, as well as the use of other flow gauges in Christchurch not directly at the monitoring sites, may bias the results through differences in habitat and additional discharge inputs. This may lead to inaccurate trend conclusions. For the sites where flow at the time of sampling is unknown, given the long period of monitoring, it is considered that variations in flow rates between sampling events will not strongly influence the trends analysis, as most events will have been conducted during baseflow conditions.

Data for the Heathcote River at Ferniehurst Street site were adjusted in Time Trends by the flow (m³/s) for the period 24-hours prior to sampling, using the Locally Weighted Scatterplot Smoothing (LOWESS) method.

2.4.1 Water Quality Index

A Water Quality Index (WQI) was developed for the CCC monthly monitoring sites, based on a Canadian WQI (CCME; Canadian Council of Ministers for the Environment, 2001). This index uses three factors to assess water quality: scope (the percentage of parameters not meeting the guideline on at least one occasion); frequency (the percentage of samples that did not meet the guideline); and amplitude (the amount by which the guideline was not met). The WQI ranges from 0 – 100, with 100 representing high water quality. The user can choose which parameters to include and what guideline levels are appropriate to their system.

The parameters used in the CCC WQI were copper, zinc, pH, TSS, DO, temperature, BOD₅, total ammonia, NNN, DRP and *E. coli*. WQI scores were used to categorise the CCC sites as being 'very poor' (0 – 39.9), 'poor' (40 – 69.99), 'fair' (70 – 79.9), 'good' (80 – 89.9) or 'very good' (90 – 100). The categories were selected based on local knowledge of water quality compared to other waterways nationally. These categorise Christchurch City waterways as expected. The WQI index was calculated for every year from 2013, to allow comparisons over time.

Auckland Council (Holland, *et al* 2016) and ECan (Robinson & Stevenson, 2016) have also adapted this CCME WQI index for their own purposes. However, because the parameters used to calculate these indices and/or their categories are different, these indices cannot be compared.

To test for significant relationships in WQI between catchments and years, statistical models were run in the program R (Version 3.5.0). Generalised Linear Mixed Effects Models with a binomial error structure and logit link function were used (Crawley, 2007), with the following combinations of fixed effects: (1) a null model with intercept only; (2) a model that considered 'year'; (3) a model that considered 'catchment'; and (4) a model that considered the interaction between 'year' and 'catchment'. 'Year' was also included in each model as a random effect to account for temporal autocorrelation (repeated measures). 'Site' was also included as an observational level random effect, due to the models exhibiting overdispersion (Harrison, 2014; Harrison, 2015). Boxplots of WQI across years was also graphed in R for each catchment (see the explanation of how to interpret boxplots in the Summary Statistics and Graphs section).

3 Results: Monthly Monitoring

3.1 Rainfall

- Daily rainfall has been collected at the Christchurch Botanic Gardens by the CCC since the early 1960's.
- 2015 and 2016 were dry years, while 2017 was much wetter (rolling weekly average of the previous 52 weeks; Figure 2).
- For the 2017 monitoring year (for the CCC monthly data only), the Ōpāwaho/ Heathcote and Huritini/ Halswell River catchments recorded the most number of sampling days affected by rain (34% each), followed by the Ōtūkaikino River (26%), Pūharakekenui/ Styx River (25%), Linwood Canal (17%) and Ōtākaro/ Avon River catchments (12%). This was based on observations of the water quality samplers as to whether it had rained within 24 hours of sampling.

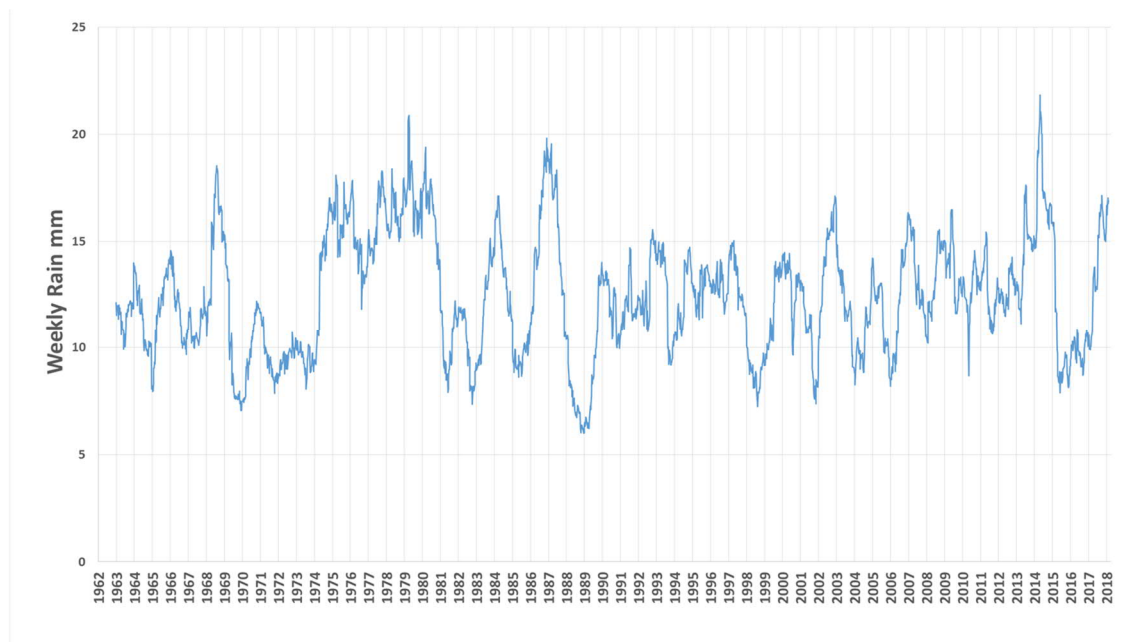


Figure 2. Average weekly rainfall at the Botanic Gardens in Hagley Park

3.2 Water Quality Parameters

- Over 13,000 tests were conducted during the monitoring year for the CCC monthly monitoring, with 7,335 of these allowing the assessment of each waterway site against relevant guideline levels (Table 3). Twenty percent of these samples did not meet the guideline level, with 41 sites (98%) not meeting the guideline for at least one parameter.
- The NNN guideline was exceeded most frequently (83% of samples and 33 sites), followed by DRP (68% of samples and 27 sites) and DIN (40% of samples and 16 sites).
- The majority of parameters did not change in concentration since monitoring began (as detailed in Table i in Appendix A), with 361 (55%) parameter-site combinations

recording no significant upwards or downwards trends in concentrations (Tables 4a to 4d). However, 61 (9%) parameter-site combinations recorded a significant decline in water quality, 178 (27%) recorded a significant improvement in water quality, and 53 (8%) recorded a significant change that could represent either a decline or improvement in water quality (pH), or could be tidally influenced (conductivity).

- The largest increase in parameter concentrations were:
 - 46% rise in NNN at the Ōtūkaikino Creek at Omaka Scout Camp site (Figure 3)
 - 40% increase in TSS at the Haytons Stream site (Figure 4)
- The largest decreases in parameter concentrations were:
 - 102% reduction in dissolved lead at the Halswell Retention Basin Outlet (Figure 5)
 - 56% reduction in dissolved copper at Curletts Road Stream Upstream of Heathcote River (Figure 6)
 - 52% reduction in dissolved lead at Cashmere Stream at Worsleys Road (Figure 7)
 - 49% reduction in dissolved lead at Dudley Creek (Figure 8)
 - 45% reduction in dissolved zinc at Knights Stream (Figure 9)
 - 45% reduction in BOD₅ at Knights Stream (45%) (Figure 10)

3.2.1 Dissolved Copper

- 95th percentiles of all sites complied with their respective guidelines, with the exception of Curletts Road Stream at Motorway (Appendix D, Figure i (a) – (b)).
- There were individual samples that exceeded the guidelines at three sites: Curletts Road Stream Upstream of the Heathcote River, Heathcote River at Opawa Road and Ōtūkaikino River at Groynes Inlet.
- Of the three highest values recorded (0.02 mg/L, 0.0081 mg/L and 0.0078 mg/L), all were from the two Curletts Road Stream sites and two were associated with rain. The highest level was associated with rain and was nearly 2.5 times higher than any other record.
- The Halswell Retention Basin sites recorded levels generally higher than the waterway sites, with the exception of the Curletts Road Stream at Motorway site. Levels were more variable and higher at the inlet compared to the outlet.
- Curletts Road Stream Upstream of Heathcote River, Heathcote River at Rose Street and Heathcote River at Ferniehurst Street all recorded much lower copper concentrations compared to the 2016 monitoring year. The Heathcote River at Catherine Street site showed higher concentrations compared to the last monitoring year.
- Concentrations have generally remained stable since monitoring was instigated, but three sites showed large decreases: Avon River at Bridge Street (39%), Curletts Road Stream at Upstream of Heathcote River (56%) and Halswell Retention Basin Outlet (15%) (Tables 4 (a) – (d)).

3.2.2 Dissolved Lead

- All site samples complied with their respective guidelines (Appendix D, Figure ii (a) – (b)).
- The Heathcote River at Rose Street site was the only site to record a value above the LOD (0.0016 mg/L) and this was not associated with any rain.

- Concentrations generally remained stable over time, but a few sites showed large decreases: Dudley Creek (49%), Curletts Road Stream Upstream of Heathcote River (25%), Cashmere Stream at Worsleys Road (52%), Halswell Retention Basin Outlet (102%) and Halswell River at Akaroa Highway (31%) (Tables 4 (a) – (d)).

3.2.3 Dissolved Zinc

- 95th percentiles for the Addington Brook, Haytons Stream, both Curletts Road Stream sites, Heathcote River at Rose Street and Nottingham Stream sites, all exceeded their respective guideline levels (Appendix D, Figure iii (a) – (b)).
- Three other sites also recorded individual samples above the guidelines: Avon River at Pages, Kā Pūtahi Creek and Wilsons Stream.
- The three highest values (0.44 mg/L, 0.43 mg/L and 0.35 mg/L) were from the two Curletts Road Stream sites and were associated with rain.
- Levels in the Halswell Retention Basin sites were higher than the waterway sites, with the exception of Haytons Stream, Curletts Stream, and the Heathcote River at Rose Street. Outlet concentrations were lower than the inlet.
- Zinc levels in the Pūharakekenui/ Styx and Ōtūkaikino River catchments were generally lower than the other catchments.
- The upper tributaries of the Ōpāwaho/ Heathcote River typically had higher concentrations than the lower reaches.
- The Haytons Stream site recorded much higher zinc concentrations this year compared to the 2016 monitoring year.
- Concentrations have generally remained stable since sampling was instigated (Tables 4 (a) – (d)). A few sites showed large decreases: Wairarapa Stream (20%), Dudley Creek (24%), Avon River at Pages (18%), Knights Stream at Sabys Road (45%), Styx River at Gardiners Road (23%), Smacks Creek at Gardiners Road (19%) and Ōtūkaikino River at Groynes Inlet (16%). However, Curletts Stream at Motorway recorded a 26% increase in zinc over time.

3.2.4 pH

- Medians of all CCC and SLLT sites complied with the guideline levels (Appendix D, Figure iv (a) – (c)).
- For the CCC sites, exceedances of individual samples were recorded once each at the Haytons Stream at Retention Basin Inlet and Halswell Retention Basin Inlet sites, and on several occasions at the Halswell Retention Basin Outlet.
- The three highest values were all from the Halswell Retention Basin Outlet (pH of 9.9, 9.7 and 9.5), with the latter value the only one associated with rain.
- Many of the SLLT sites had individual recordings that breached the lower 6.5 guideline.
- The Halswell Retention Basin sites recorded higher pH than the waterway sites. Levels were much higher at the outlet than the inlet, with many outlet samples breaching the upper guideline of 8.5.
- pH levels at the SLLT sites were generally a lot lower than that recorded at the CCC sites, including similar sites in the Pūharakekenui/ Styx River catchment.
- Concentrations did not change over time by any large degree (Tables 4 (a) – (e)).

3.2.5 Conductivity

- No relevant guidelines exist for conductivity.

- The tidal sites had greater conductivity and variability in these values than non-tidal sites, due to saline influence (Appendix D, Figure v (a) – (c)).
- Addington Brook and both Curletts Road Stream sites had more variability and higher concentrations compared to other non-tidal sites, indicating pollution sources.
- Both Halswell Retention Basin sites had levels comparable to the waterway sites, and levels were lower at the outlet.
- Conductivity at the SLTT sites were similar to the CCC waterway sites.
- Concentrations generally did not change over time by any large degree, except for increases at the Avon River at Bridge Street and Linwood Canal sites of 11% and 12%, respectively (Tables 4 (a) – (e)).

3.2.6 TSS

- Medians of all waterway sites complied with the guideline level, with the exception of Heathcote River at Tunnel Road and Heathcote River at Ferrymead Bridge (Appendix D, Figure vi (a) – (b)).
- Many sites in the Ōpāwaho/ Heathcote River catchment and two sites in the Ōtākaro/ Avon River catchment (Dudley Creek and Avon River at Bridge Street) recorded individual samples above the guideline level.
- The three highest TSS values (130 mg/L, 90 mg/L and 70 mg/L) were recorded from tidal sites in the Ōpāwaho/ Heathcote catchment, with only the highest value recorded in association with rain.
- The Halswell Retention Basin inlet generally recorded levels higher than the waterway sites. Levels were lower at the outlet than the inlet.
- Higher TSS was recorded in the lower, tidal sites of the Ōtākaro/ Avon and Ōpāwaho/ Heathcote catchments, potentially due to resuspension of the naturally softer substrate at these locations compared to non-tidal sites.
- A number of sites recorded a substantial decrease in concentrations over time (Tables 4 (a) – (d)): Avon River at Dallington Terrace (20%), Curletts Road Stream Upstream of Heathcote River (16%), Heathcote River at Opawa Road (11%), Heathcote River at Mackenzie Avenue (16%), Halswell Retention Basin Outlet (17%), Styx River at Main North Road (17%) and Kā Pūtahi Creek at Blakes Road (18%). However, a 40% increase was recorded at the Haytons Stream at Retention Basin site.

3.2.7 Turbidity

- The medians of the following sites exceeded the guideline: Addington Brook, Dudley Creek, Avon River at Bridge Street, Haytons Stream, Cashmere Stream at Worsleys Road, Heathcote River at Ferniehurst Street, Heathcote River at Bowenvale Avenue, Heathcote River at Tunnel Road and Heathcote River at Ferrymead Bridge (Appendix D, Figure vii (a) – (b)).
- A number of other sites also had individual samples that exceeded the guideline.
- The three highest turbidity readings (170, 140 and 130 NTU) were recorded from the five most downstream sites of the Ōpāwaho/ Heathcote River, the lower ones being tidal sites. None of these recordings were associated with rain.
- Turbidity was typically higher in the Ōtākaro/ Avon River tributaries than the mainstem. The bottom two Ōpāwaho/ Heathcote River tidal sites recorded much higher and variable turbidity than the other catchment sites.

- The Ōpāwaho/ Heathcote River catchment, followed by the Ōtākaro/ Avon River catchment, generally recorded higher turbidity levels compared to the other catchments.
- Compared to the 2016 monitoring year, turbidity was higher this year at the Cashmere Stream at Worsleys Road site and all sites downstream of this site.
- Large changes over time were recorded at Curletts Road Stream Upstream of Heathcote River (14% decrease) and Ōtūkaikino River at Groynes Inlet (17% decrease) (Tables 4 (a) – (d)).

3.2.1 Water Clarity (SLLT sites only)

- The medians of the following sites did not comply with the guideline: Styx River at Willowbank, Styx River at Redwood Springs Sites 1 – 3, Kā Pūtahi Creek at Everglades Golf Course and Styx River at Brooklands (Appendix D, Figure viii).
- A number of other sites also had individual samples that exceeded the guideline, with the three worst values recorded from Smacks Creek Conservation Reserve (60 cm), Styx River at Redwood Springs Site 3 (65 cm) and Styx River at Redwood Springs Site 2 (65 cm).
- Water clarity was similar across sites, and between the mainstem and tributaries.
- No large changes in levels were recorded over time (Table 4 (e)).

3.2.2 DO

- Medians of the following sites did not meet the guideline: Horseshoe Lake Discharge, Heathcote River at Templetons Road, Curletts Road Stream at Motorway, both Cashmere Stream sites, Heathcote River at Catherine Street, Styx River at Gardeners Road, Smacks Creek at Gardiners Road and Linwood Canal (Appendix D, Figure ix (a) – (b)).
- Many other sites had individual samples that did not meet the guideline.
- The three lowest readings were 21% (at the Kā Pūtahi Creek at Blakes Road site; not associated with rain), 25% (at the Halswell Retention Basin Inlet; associated with rain) and 31% (recorded on three occasions at the Curletts Road Stream at Southern Motorway site, with one of these associated with rain, and one occasion at the Curletts Road Stream Upstream of Heathcote River site, which wasn't associated with rain).
- DO levels were much higher at the Halswell Retention Basin outlet than the inlet, and fairly comparable to the waterway sites.
- Dissolved oxygen levels were lower in the Ōpāwaho/ Heathcote catchment, particularly at the upstream sites.
- The Curletts Road Stream at Motorway site recorded higher DO concentrations during the monitoring year compared to 2016.
- Levels did not change over time by any large degree (Tables 4 (a) – (d)).

3.2.3 Water Temperature

- Medians of all CCC and SLLT sites complied with their respective guidelines (Appendix D, Figure x (a) – (c)).
- However, individual samples for the CCC sites exceeded this guideline at the Heathcote River at Ferrymead Bridge site and the three most downstream sites in the Ōtākaro/ Avon catchment. The SLLT Styx River at Redwood Springs Site 2 site also exceeded the guideline on occasion.

- The three highest readings were recorded from Linwood Canal (26.1 °C), Avon River at Bridge Street (23.4 °C) and Avon River at Pages/Seaview Bridge (22.1 °C).
- The inlet and the outlet of the Halswell Retention Basin recorded similar levels. These two sites recorded higher and more variable temperatures than the waterway sites.
- Water temperature was generally more variable in the downstream reaches of the catchments.
- The SLLT sites typically recorded similar temperatures to the CCC sites, although levels were higher at the Redwood Springs sites.
- Levels did not change over time by any large degree (Tables 4 (a) – (e)).

3.2.4 BOD₅

- Medians of all sites complied with the guideline, with the exception of Haytons Stream (Appendix D, Figure xi (a) – (b)).
- However, a number of individual samples exceeded the guideline, particularly in the Ōpāwaho/ Heathcote River catchment.
- Nearly half of all river sites recorded all values below the LOD.
- The highest values recorded were 7.5 mg/L at the Haytons Stream site (associated with rain), and 6.6 mg/L at the Halswell Retention Basin Inlet (not associated with rain) and Outlet (associated with rain).
- Levels in the Halswell Retention Basin sites were generally higher than the waterway sites and levels were lower at the outlet.
- Levels were typically higher in the Ōpāwaho/ Heathcote River catchment.
- A marked reduction in BOD₅ was recorded this monitoring year at the Heathcote River at Bowenvale site and in Nottingham Stream compared to last monitoring year. However, higher concentrations were recorded at Dudley Creek, Heathcote River at Opawa Road/Clarendon Terrace, Heathcote River at Mackenzie Avenue and Kā Pūtahi Creek at Blakes Road.
- Most sites across all catchments recorded large decreases in BOD₅ since sampling was instigated (Tables 4 (a) – (d)).

3.2.5 Total Ammonia

- 95th percentiles of all sites complied with their respective guidelines and no individual samples exceeded the guidelines either (Appendix D, Figure xii (a) – (b)).
- Comparatively high levels were recorded at the Kā Pūtahi Creek at Blakes Road site compared to the other sites.
- The three highest levels were not recorded in association with rain, and were from the Halswell Retention Basin Inlet (2.2 mg/L, 1.5 mg/L) and Outlet (1.5 mg/L).
- Both Halswell Retention Basin sites typically recorded values higher than the waterway sites, and levels were lower at the outlet.
- Ammonia was generally higher in the tributaries compared to mainstems.
- Haytons Stream showed lower levels of ammonia this monitoring year compared to last monitoring year. Kā Pūtahi Creek at Blakes Road site showed higher levels than that recorded in the last three annual monitoring reports (2014-2016).
- Levels generally remained stable over time (Tables 4 (a) – (d)). The following sites recorded large decreases in concentrations: Cashmere Stream at Sutherlands Road (24%), Heathcote River at Ferrymead Bridge (13%), Halswell Retention Basin Outlet (34%) and Ōtūkaikino River at Groynes Inlet (15%).

3.2.6 Nitrate, NNN and DIN

- All waterway sites complied with the nitrate guidelines (Appendix D, Figure xiii (a) – (b)), most sites did not comply with the NNN guideline (Appendix D, Figure xiv (a) – (b)) and over one third of sites did not comply with their respective DIN guideline (Appendix D, Figure xv (a) – (b)).
- Knights Stream recorded much higher levels of nitrogen than the other sites, with the three highest exceedances of nitrate, NNN and DIN (4.3 mg/L, 3.9 mg/L and 3.8 mg/L for all three parameters) all from this site. Only the highest NNN and DIN recordings were associated with rain.
- Both Halswell Retention Basin sites recorded levels comparable to the waterway sites. Nitrate and NNN levels were generally higher at the outlet, and DIN levels were similar.
- Both Halswell Retention Basin sites recorded levels comparable to the waterway sites. Nitrate and NNN levels were generally higher at the outlet, and DIN levels were similar.
- All three parameters typically decreased downstream in the mainstem, and were lower in the Pūharakekenui/ Styx, Ōtūkaikino and Linwood Canal catchments.
- Compared to last monitoring year, a reduction in nitrate was recorded at the Knights Stream and Halswell River at Akaroa Highway sites, but an increase was recorded at Nottingham Stream. DIN concentrations were greater at the Kā Pūtahi Creek at Blakes Road site this monitoring year compared to last.
- NNN and DIN concentrations of all three parameters generally remained stable or decreased over time (Tables 4 (a) – (d)). Large decreases were recorded at Haytons Stream at Retention Basin (NNN = 13%, DIN = 12%), Curletts Road Stream at Motorway (NNN = 19%, DIN = 18%), Halswell Retention Basin Outlet (DIN = 13%), Nottingham Stream at Candy's Road (NNN = 12%) and Linwood Canal (NNN = 15%). An increase in NNN levels of 46% was recorded at Ōtūkaikino River at Omaka Scout Camp.

3.2.7 DRP

- Over half of sites did not comply with their respective guidelines (Appendix D, Figure xvi (a) – (b)).
- Particularly high levels were recorded in Haytons Stream.
- The three highest values (0.78 mg/L, 0.76 mg/L and 0.59 mg/L) were from Haytons Stream and only one of these recordings was associated with rain.
- The Halswell Retention Basin sites were within the higher range of the waterway sites, and concentrations were lower at the outlet.
- DRP generally increased downstream.
- Both Haytons Stream and Nottingham Stream recorded markedly lower concentrations this year compared to the 2016 monitoring year.
- The majority of sites recorded a decrease in DRP concentrations since monitoring began (Tables 4 (a) – (d)). The largest decrease was at Cashmere Stream at Sutherlands Road (20%).

3.2.8 *E. coli*

- Two-thirds of sites did not comply with the guideline (Appendix D, Figure xvii (a) – (b)).
- The highest value was from Riccarton Main Drain (>24,000 CFU/100ml) and was not recorded in association with rain. The next two highest records of 17,000 CFU/100ml were associated with rain (at the Heathcote River at Opawa Road/Clarendon Terrace and Curletts Road Stream at Motorway sites). None of those events were associated with any recorded overflow events.
- The Halswell Retention Basin sites were within the range of that recorded at the waterway sites, and the outlet concentrations were generally lower than the inlet.
- Levels were generally higher in the Ōpāwaho/ Heathcote and Huritini/ Halswell catchments.
- Nottingham Stream recorded much lower concentrations this year compared to last monitoring year.
- Concentrations generally remained stable over time (Tables 4 (a) – (d)), although large changes were recorded at Curletts Road Stream Upstream of Heathcote River (13% decrease) and Halswell River at Akaroa Highway (12% increase).

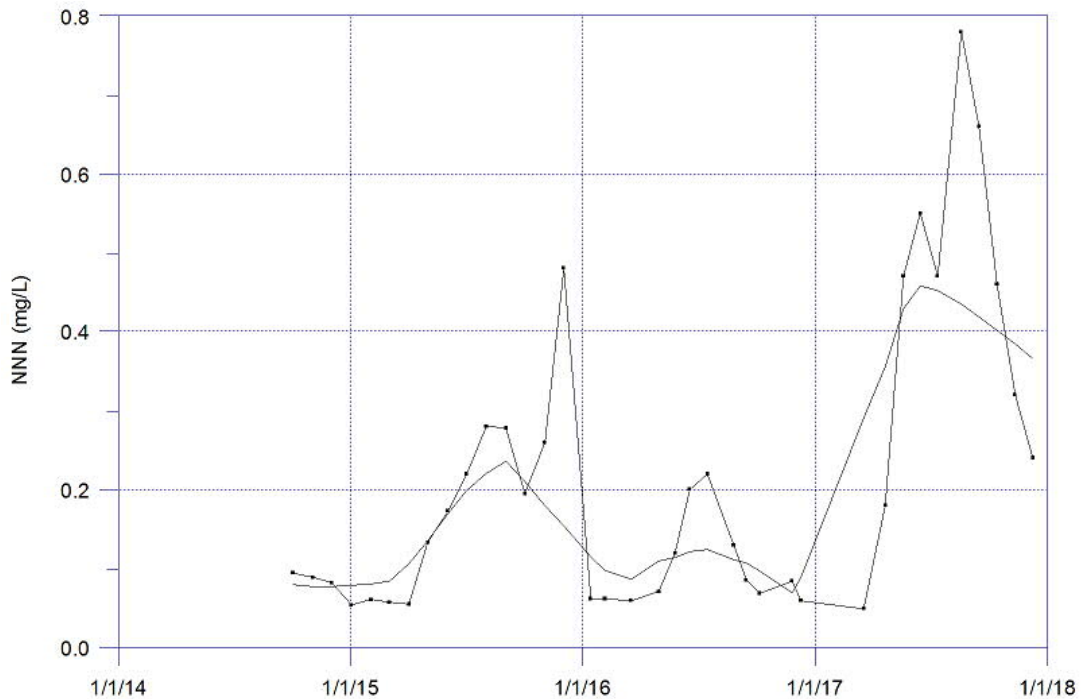


Figure 3. NNN levels at the Ōtūkaikino Creek at Omaka Scout Camp site for the monitoring period October 2014 to December 2017. Squares indicate individual sampling events. The trendline was fitted using the Locally Weighted Scatterplot Smoothing (LOWESS) method in the Time Trends software. A positive (i.e. increasing) trend of 46% was recorded over the sampling period.

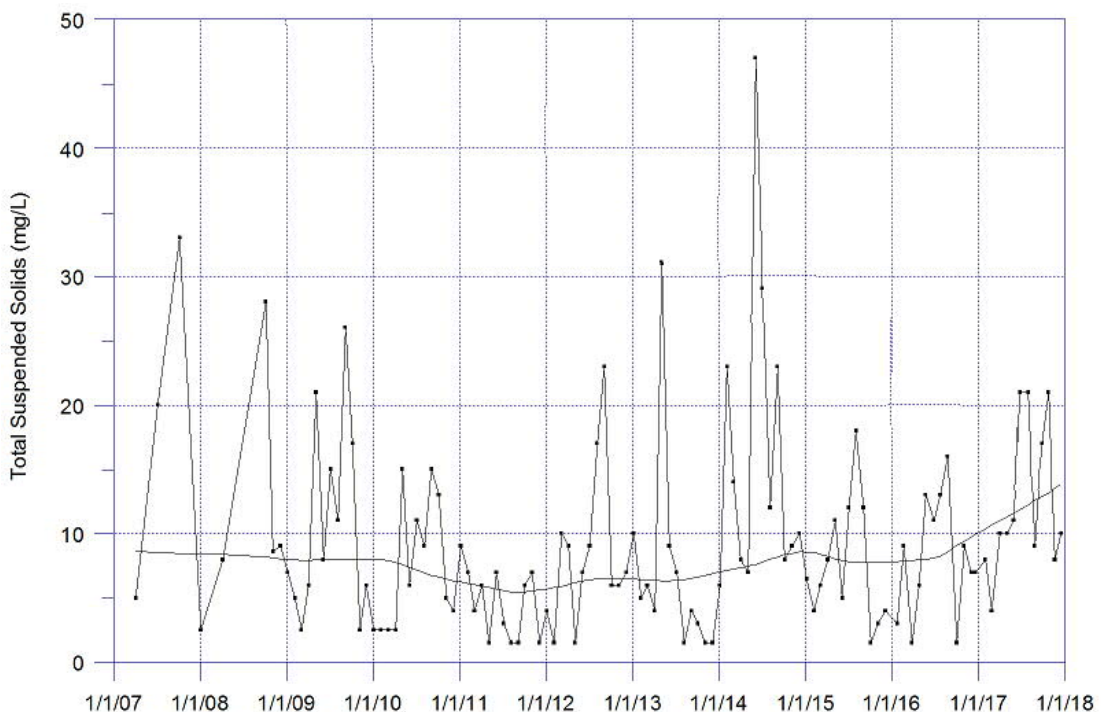


Figure 4. TSS levels at the Haytons Stream site for the monitoring period April 2007 to December 2017. Squares indicate individual sampling events. The trendline was fitted using the Locally Weighted Scatterplot Smoothing (LOWESS) method in the Time Trends software. A positive (i.e. increasing) trend of 40% was recorded over the sampling period.

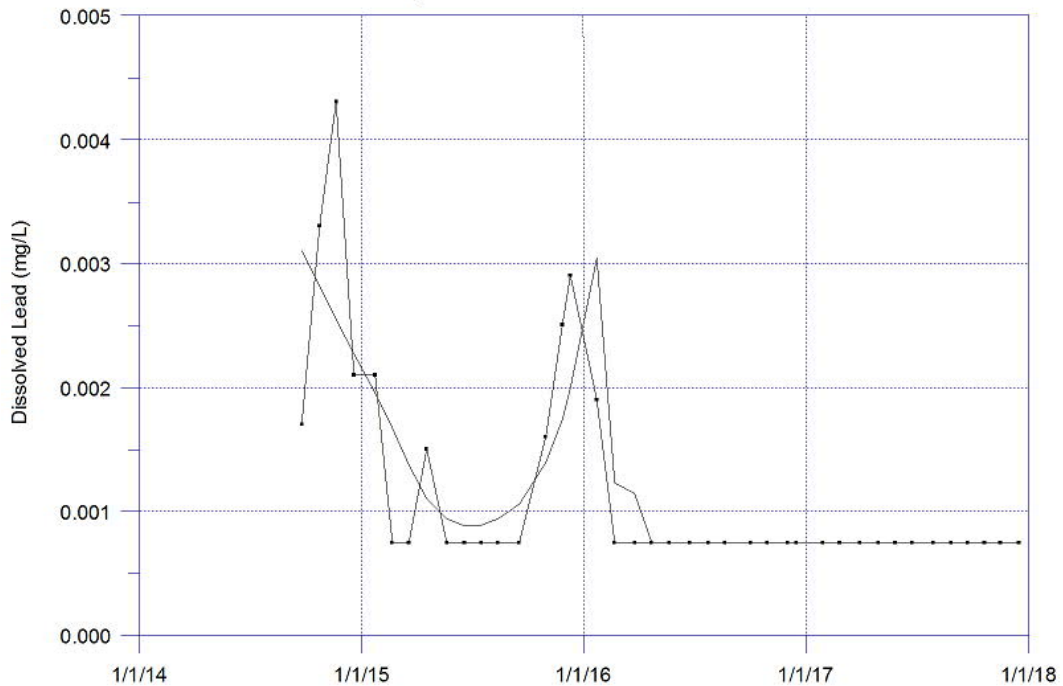


Figure 5. Dissolved lead levels at the Halswell Retention Basin Outlet site for the monitoring period September 2014 to December 2017. Squares indicate individual sampling events. The trendline was fitted using the Locally Weighted Scatterplot Smoothing (LOWESS) method in the Time Trends software. A negative (i.e. decreasing) trend of 102% was recorded over the sampling period.

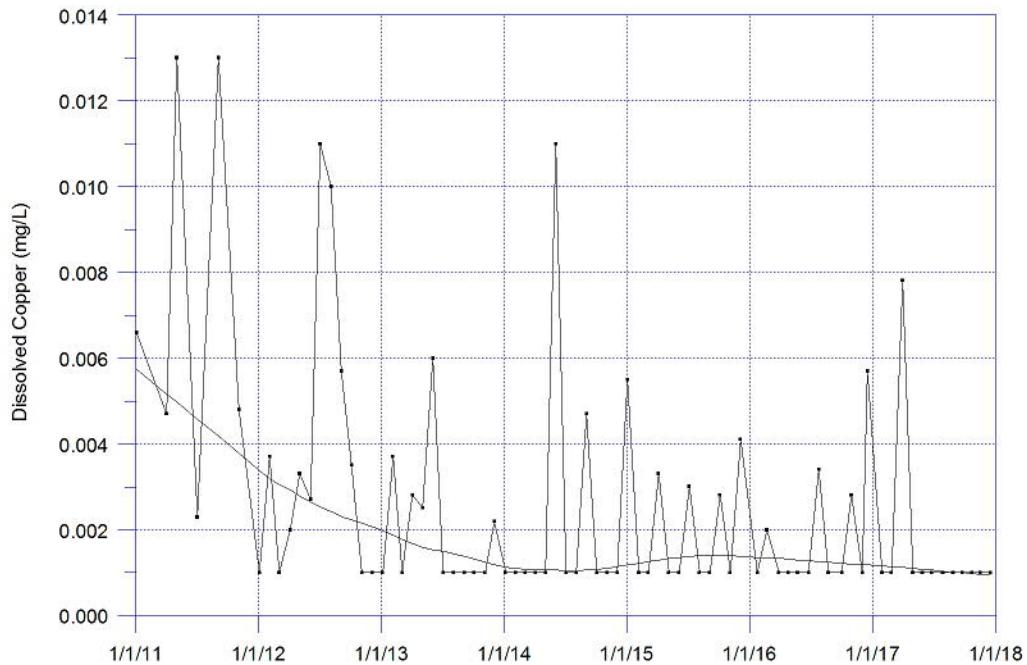


Figure 6. Dissolved copper levels at the Curletts Road Stream Upstream of Heathcote River site for the monitoring period January 2011 to December 2017. Squares indicate individual sampling events. The trendline was fitted using the Locally Weighted Scatterplot Smoothing (LOWESS) method in the Time Trends software. A negative (i.e. decreasing) trend of 56% was recorded over the sampling period.

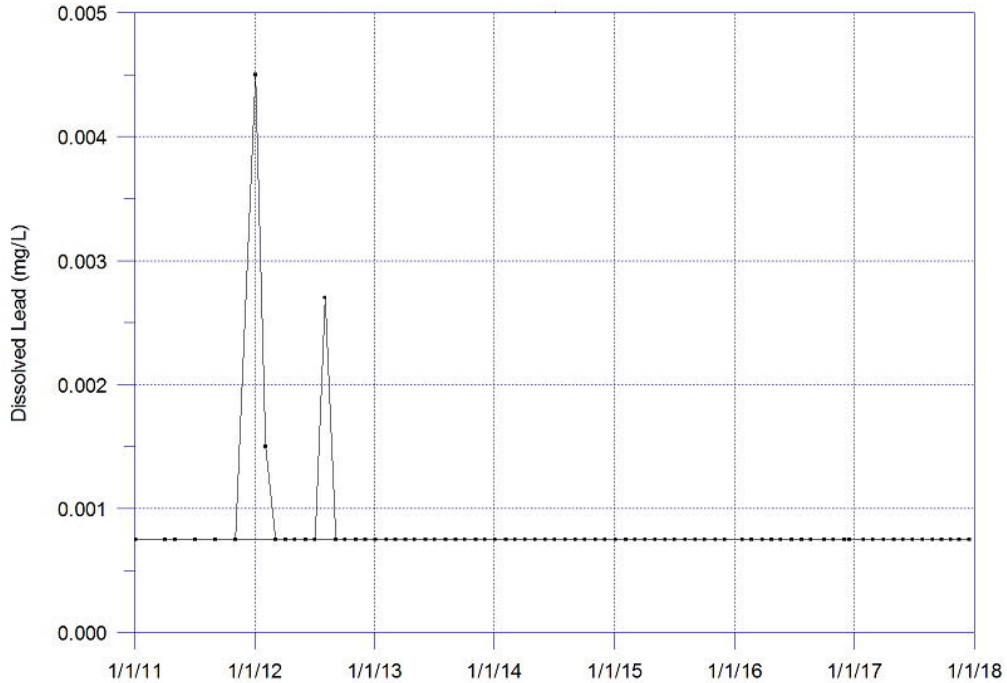


Figure 7. Dissolved lead levels at the Cashmere Stream at Worsleys Road site for the monitoring period January 2011 to December 2017. Squares indicate individual sampling events. A negative (i.e. decreasing) trend of 52% was recorded over the sampling period.

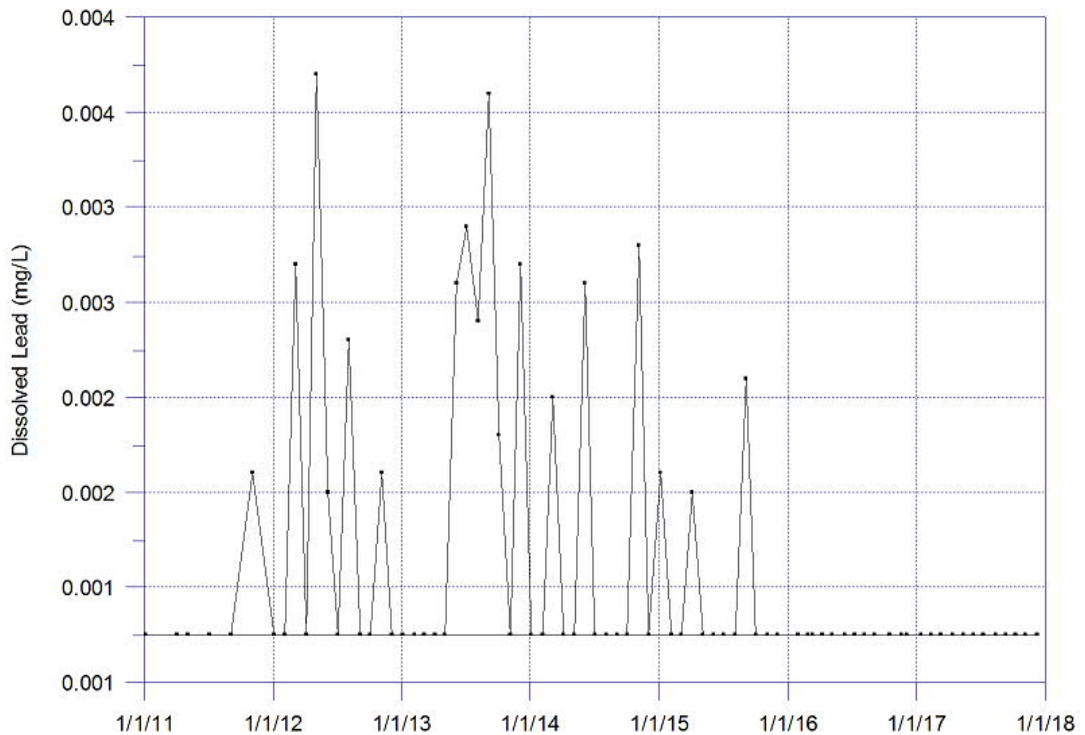


Figure 8. Dissolved lead levels at the Dudley Creek site for the monitoring period January 2011 to December 2017. Squares indicate individual sampling events. A negative (i.e. decreasing) trend of 49% was recorded over the sampling period.

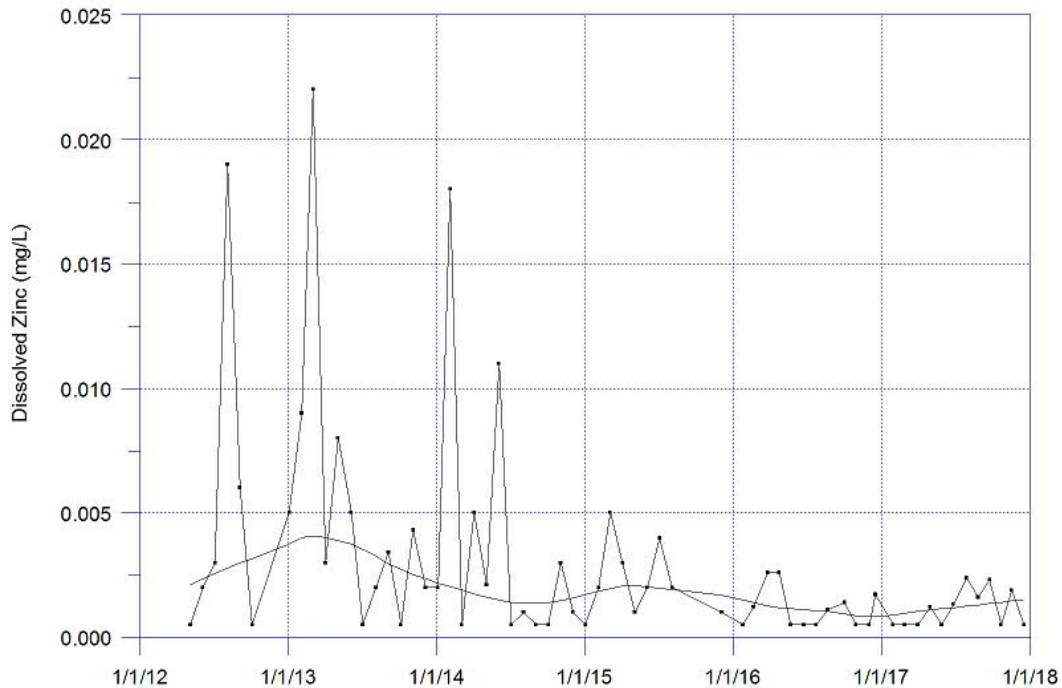


Figure 9. Dissolved zinc levels at the Knights Stream site for the monitoring period May 2012 to December 2017. Squares indicate individual sampling events. The trendline was fitted using the Locally Weighted Scatterplot Smoothing (LOWESS) method in the Time Trends software. A negative (i.e. decreasing) trend of 45% was recorded over the sampling period.

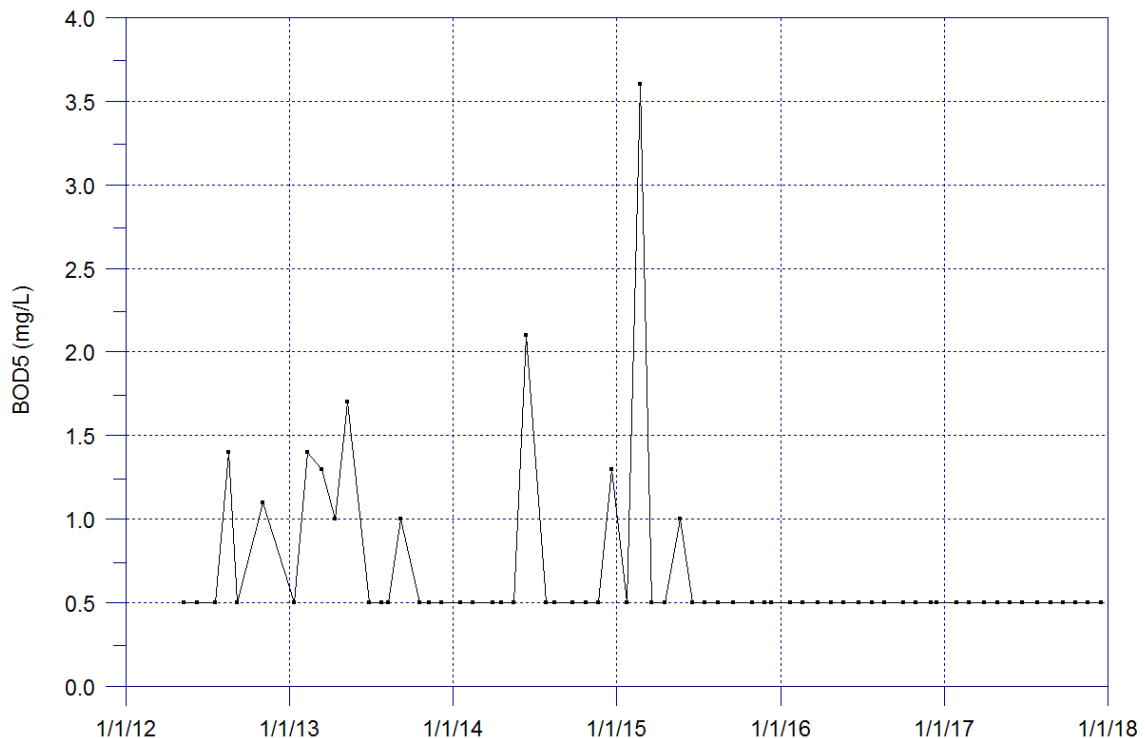


Figure 10. BOD₅ levels at the Knights Stream site for the monitoring period May 2012 to December 2017. Squares indicate individual sampling events. A negative (i.e. decreasing) trend of 45% was recorded over the sampling period.

Table 3. Number of waterway sites monitored for each parameter (where guideline levels are available), the number of samples analysed and the number of samples and sites (based on medians/95th percentiles, depending on the parameter) not meeting the guideline levels, during the monitoring period of January to December 2017.

Parameter	Guideline	Number of Sites Monitored	Number of Samples Analysed	Number of Samples Not Meeting Guideline	Number of Sites Not Meeting Guidelines
Nitrate Nitrite Nitrogen	<0.444 mg/L	42	493	409 (83.0%)	33
Dissolved Reactive Phosphorus	Varies depending on catchment, from <0.016 mg/L to <0.025 mg/L	42	493	336 (68.2%)	27
Dissolved Inorganic Nitrogen	Varies depending on catchment, from <0.09 mg/L to <1.5 mg/L	42	493	196 (39.8%)	16
<i>Escherichia coli</i>	<550/100ml	42	493	145 (29.4%)	28
Turbidity	<5.6 NTU	37	433	127 (29.3%)	9
Dissolved oxygen	Varies depending on catchment, from >70% to >90%	42	493	100 (20.3%)	9
Dissolved zinc	Varies depending on catchment, from <0.00868 mg/L to <0.146 mg/L	42	493	63 (12.8%)	6
Biochemical Oxygen Demand	<2 mg/L	42	493	52 (10.5%)	1 (Haytons Stream at Retentions Basin)
Total Suspended Solids	<25 mg/L	42	493	34 (6.9%)	2 (Heathcote River at Tunnel Road, Heathcote River at Ferrymead Bridge)
Dissolved copper	Varies depending on catchment, from <0.00152 mg/L to <0.00543 mg/L	42	493	21 (4.3%)	1 (Curletts Road Stream at Motorway)
Water temperature	Varies depending on catchment, from <20°C to <25°C	42	493	11 (2.2%)	0
Nitrate	Median <3.8 mg/L and/or 95 th ile <5.6 mg/L	42	493	3 (0.6%)	0
pH	6.5 to 8.5	42	493	1 (0.2%)	0
Dissolved lead	Varies depending on catchment, from <0.00384 mg/L to <0.167 mg/L	42	493	0 (0%)	0
Total ammonia	Varies depending on catchment, from <0.32 mg/L to <1.75 mg/L	42	493	0 (0%)	0
Total	-	42	7,335	1,498 (20.4%)	41 (97.6%) (for at least one parameter)

Table 4a. Direction of significant trends ($p \leq 0.05$) for parameters monitored monthly at each of the sites in the Ōtākaro/ Avon River catchment (refer to Appendix C, Table i for sample periods).

Site	Dissolved copper	Dissolved lead	Dissolved Zinc	DRP	pH	EC	TSS	Turbidity	DO	Temp	BOD ₅	Total Ammonia	NNN	DIN	<i>E. coli</i>
Wairarapa Stream			↓ 20%	↓ 11%					↑ 1%	↑ 1%	↓ 22%		↓ 3%	↓ 3%	
Waimairi Stream				↓ 13%	↑ 0%			↓ 4%		↑ 1%			↓ 3%	↓ 3%	
Avon River at Mona Vale				↓ 11%				↓ 6%		↑ 1%			↓ 3%	↓ 2%	
Avon River at Carlton Mill Corner				↓ 13%	↑ 0%			Not Sampled		↑ 1%	↓ 16%	↑ 2%	↓ 5%	↓ 5%	
Riccarton Main Drain				↓ 10%		↑ 4%				↑ 1%			↑ 7%	↑ 6%	
Addington Brook					↑ 0%					↑ 1%	↓ 16%				
Avon River at Manchester Street				↓ 9%	↑ 0%				↑ 1%	↑ 1%	↓ 13%		↓ 5%	↓ 5%	↓ 6%
Dudley Creek		↓ 49%	↓ 24%	↓ 3%	↑ 0%	↓ 2%		↑ 5%	↑ 1%	↑ 2%	↓ 10%		↓ 8%	↓ 6%	
Avon River at Dallington Terrace/Gayhurst Road					↑ 0%		↓ 20%	↓ 8%	↑ 1%	↑ 1%	↓ 10%	↓ 5%	↓ 2%	↓ 3%	
Horseshoe Lake Discharge					↑ 0%			↓ 4%		↑ 1%	↓ 10%		↓ 4%	↓ 4%	↑ 5%
Avon River at Avondale Road				↓ 4%	↑ 0%	↑ 3%		Not Sampled		↑ 1%	↓ 23%		↓ 6%	↓ 7%	
Avon River at Pages/Seaview Bridge			↓ 18%	↓ 3%	↑ 0%	↑ 10%		↓ 4%	↑ 1%	↑ 1%	↓ 14%	↓ 5%	↓ 4%	↓ 4%	↑ 5%
Avon River at Bridge Street	↓ 39%			↓ 5%	↑ 1%	↑ 11%			↑ 1%	↑ 1%	↓ 13%	↓ 6%	↓ 3%	↓ 3%	↑ 6%

Notes: EC = Electrical Conductivity, TSS = Total Suspended Solids, DO = Dissolved Oxygen, Temp = Temperature; BOD₅ = Biochemical Oxygen Demand, NNN = Nitrate Nitrite Nitrogen and DIN = Dissolved Inorganic Nitrogen. Blank cells indicate no significant upwards or downwards trends. Trends of 0% are due to rounding values of less than one to the nearest whole number.

Table 4b. Direction of significant trends ($p \leq 0.05$) for parameters monitored monthly at each of the sites in the Ōpāwaho/ Heathcote River catchment (refer to Appendix C, Table i for sample periods).

Site	Dissolved copper	Dissolved lead	Dissolved Zinc	DRP	pH	EC	TSS	Turbidity	DO	Temp	BOD ₅	Total Ammonia	NNN	DIN	<i>E. coli</i>
Heathcote River at Templetons Road				↓ 15%	↑ 0%										
Haytons Stream at Retention Basin				↓ 9%			↑ 40%				↓ 6%		↓ 13%	↓ 12%	
Curletts Road Stream at Motorway			↑ 26%	↓ 8%	↑ 1%	↑ 2%		Not Sampled					↓ 19%	↓ 18%	
Curletts Road Stream Upstream of Heathcote River	↓ 56%	↓ 25%			↑ 0%		↓ 16%	↓ 14%			↓ 12%				↓ 13%
Heathcote River at Rose Street				↓ 5%	↑ 0%					↑ 1%	↓ 11%		↓ 3%	↓ 3%	
Cashmere Stream at Sutherlands Road				↓ 20%	↑ 1%	↑ 1%					↓ 13%	↓ 24%	↓ 7%	↓ 7%	↑ 10%
Cashmere Stream at Worsleys Road		↓ 52%		↓ 7%	↑ 0%			↓ 6%			↓ 8%				
Heathcote River at Ferniehurst Street				↓ 5%							↓ 15%				
Heathcote River at Bowenvale Ave				↓ 6%	↑ 0%			↓ 4%			↓ 17%				
Heathcote River at Opawa Road/Clarendon Terrace				↓ 6%	↑ 0%		↓ 11%	↓ 9%			↓ 6%				
Heathcote River at Mackenzie Avenue				↓ 8%	↑ 0%		↓ 16%	Not Sampled		↑ 1%	↓ 30%				
Heathcote River at Catherine Street				↓ 7%	↑ 0%			Not Sampled		↑ 1%	↓ 10%				
Heathcote River at Tunnel Road				↓ 9%	↑ 0%		↓ 4%	↓ 7%		↑ 1%	↓ 3%	↓ 9%			
Heathcote River at Ferrymead Bridge			↑ 4%	↓ 14%					↑ 1%	↑ 1%	↓ 6%	↓ 13%			↑ 4%

Notes: EC = Electrical Conductivity, TSS = Total Suspended Solids, DO = Dissolved Oxygen, Temp = Temperature; BOD₅ = Biochemical Oxygen Demand, NNN = Nitrate Nitrite Nitrogen and DIN = Dissolved Inorganic Nitrogen. Blank cells indicate no significant upwards or downwards trends. Trends of 0% are due to rounding values of less than one to the nearest whole number. No monitoring was undertaken at the Heathcote River at Templeton's Road site from February – June 2015, November 2015 – January 2016, March – December 2016 and January- July 2017, as the site was dry.

Table 4c. Direction of significant trends ($p \leq 0.05$) for parameters monitored monthly at each of the sites in the Huritini/ Halswell River catchment and Linwood Canal (refer to Appendix C, Table i for sample periods).

Site	Dissolved copper	Dissolved lead	Dissolved Zinc	DRP	pH	EC	TSS	Turbidity	DO	Temp	BOD ₅	Total Ammonia	NNN	DIN	<i>E. coli</i>
Halswell Retention Basin Inlet							↓ 8%	Not Sampled			↓ 12%		↑ 6%		
Halswell Retention Basin Outlet	↓ 15%	↓ 102%		↓ 14%		↓ 4%	↓ 17%	Not Sampled	↑ 4%		↓ 17%	↓ 34%	↑ 6%	↓ 13%	
Knights Stream at Sabys Road			↓ 45%		↓ 1%						↓ 45%				
Nottingham Stream at Candy's Road			↑ 10%			↓ 4%				↑ 1%	↓ 30%	↑ 3%	↓ 12%	↓ 10%	
Halswell River at Akaroa Highway		↓ 31%		↓ 4%	↑ 0%	↓ 1%			↑ 1%	↑ 1%	↓ 15%	↑ 0%	↓ 2%	↓ 2%	↑ 12%
Linwood Canal				↓ 4%	↑ 0%	↑ 12%		↓ 4%		↑ 1%	↓ 8%		↓ 15%	↓ 5%	

Notes: EC = Electrical Conductivity, TSS = Total Suspended Solids, DO = Dissolved Oxygen, Temp = Temperature; BOD₅ = Biochemical Oxygen Demand, NNN = Nitrate Nitrite Nitrogen and DIN = Dissolved Inorganic Nitrogen. Blank cells indicate no significant upwards or downwards trends. Trends of 0% are due to rounding values of less than one to the nearest whole number.

Table 4d. Direction of significant trends ($p \leq 0.05$) for parameters monitored monthly at each of the sites in the Pūharakekenui/ Styx and Ōtūkaikino River catchments (refer to Appendix C, Table i for sample periods).

Site	Dissolved copper	Dissolved lead	Dissolved Zinc	DRP	pH	EC	TSS	Turbidity	DO	Temp	BOD ₅	Total Ammonia	NNN	DIN	<i>E. coli</i>
Styx River at Gardiners Road			↓ 23%	↓ 8%	↑ 0%	↓ 2%				↑ 1%	↓ 22%		↓ 7%	↓ 7%	↑ 10%
Smacks Creek at Gardiners Road			↓ 19%	↓ 7%	↑ 0%	↓ 2%		↓ 9%		↑ 1%	↓ 15%		↓ 4%	↓ 3%	
Styx River at Main North Road				↓ 3%	↑ 0%	↓ 1%	↓ 17%	↓ 7%	↓ 1%	↑ 1%	↓ 11%		↓ 7%	↓ 6%	↑ 4%
Kā Pūtahi Creek at Blakes Road						↑ 1%	↓ 18%	↑ 5%					↑ 3%	↑ 3%	
Kā Pūtahi Creek at Belfast Road				↓ 2%	↑ 1%	↓ 1%		↓ 5%	↑ 2%	↑ 1%	↓ 6%		↑ 3%	↑ 2%	
Styx River at Marshland Road Bridge					↑ 0%	↓ 1%		↓ 5%	↑ 1%	↑ 1%	↓ 17%				↑ 4%
Styx River at Richards Bridge				↓ 3%	↑ 0%	↓ 1%				↑ 1%	↓ 20%		↓ 2%		↑ 6%
Styx River at Harbour Road Bridge					↑ 0%	↓ 2%		↓ 4%		↑ 1%	↓ 15%		↓ 4%	↓ 4%	
Ōtūkaikino River at Groynes Inlet			↓ 16%	↓ 18%				↓ 17%	↓ 1%	↑ 1%	↓ 14%	↓ 15%	↓ 8%	↓ 8%	
Ōtūkaikino River at Omaka Scout Camp					↓ 2%								↑ 46%		
Wilson's Stream						↑ 5%							↑ 5%	↑ 5%	

Notes: EC = Electrical Conductivity, TSS = Total Suspended Solids, DO = Dissolved Oxygen, Temp = Temperature; BOD₅ = Biochemical Oxygen Demand, NNN = Nitrate Nitrite Nitrogen and DIN = Dissolved Inorganic Nitrogen. Blank cells indicate no significant upwards or downwards trends. Trends of 0% are due to rounding values of less than one to the nearest whole number.

Table 4e. Direction of significant trends ($p \leq 0.05$) for parameters monitored by the Styx Living Laboratory Trust.

Site	Clarity	pH	EC	Temp
Styx River at Brooklands	↓ 1%	↑ 2%		↑ 1%
Kā Pūtahi Creek at Everglades Golf Course		↑ 2%	↑ 1%	↑ 1%
Kā Pūtahi Creek at Ouruhia Domain			↑ 2%	↑ 1%
Styx River at Radcliffe Road		↑ 4%		↑ 1%
Redwood Springs Site 1 (upstream of railway tracks)	↑ 2%	↑ 3%		↑ 3%
Redwood Springs Site 2 (downstream of railway tracks)	↑ 1%	↑ 2%		↑ 3%
Redwood Springs Site 3 (opposite Riverwood Boulevard)	↑ 2%	↑ 2%		↑ 3%
Styx Mill Conservation Reserve	↑ 1%		↑ 2%	↑ 1%
Styx River at Willowbank	↓ 1%			↑ 1%
Smacks Creek Conservation Reserve	↓ 1%			↑ 1%

3.3 Water Quality Index

- 40%, 40% and 19% of sites were recorded as having ‘poor’, ‘fair’ and ‘good’ water quality, respectively. No site had ‘very good’ water quality, as guidelines were exceeded on at least one occasion at all sites. There was also no site that recorded ‘very poor’ water quality (Table 5; Figure 11).
- The Ōpāwaho/ Heathcote River and Linwood Canal catchments generally had ‘poor’ water quality. All other catchments generally had ‘fair’ to ‘good’ water quality.
- The Ōtūkaikino River recorded the best water quality out of all the catchments and the Ōpāwaho/ Heathcote River catchment recorded the worst water quality, with the 11 worst sites all being from this catchment (Table 6).
- The best site for water quality was tied between the Ōtūkaikino River at Groynes Inlet and Waimairi Stream, followed by Wairarapa Stream in second, and the Avon River at Carlton Mill Corner and Avon River at Mona Vale tied for third.
- The worst site for water quality was Haytons Stream at Retention Basin, followed by Curletts Road Stream at Motorway and Curletts Road Stream Upstream of Heathcote River.
- The best fitting statistical model was the ‘site’ and ‘year’ interaction model, meaning that some catchments, but not all, varied in WQI depending on the year of survey ($\chi^2 = 134.89$, d.f.=24, $p < 0.0001$; Figure 12):
 - Ōtākaro/ Avon: an improvement in WQI over time, with the median WQI moving from the ‘poor’ category into the ‘good’ category in 2016 and then back down to the ‘fair’ category in 2017.
 - Ōpāwaho/ Heathcote: no improvement in WQI over time, with the median WQI always within the ‘poor’ category.




- Huritini/ Halswell: the last two monitoring years have showed an improvement compared to previous years, with the median WQI moving from the 'poor' category into the 'fair' category this monitoring year. However, this catchment consists of only three sites that may not a thorough representation of the catchment.
- Pūharakekenui/ Styx: generally recorded an improvement over time, with the median WQI moving from the 'poor' category to the 'fair' category.
- Ōtūkaikino: variable WQI scores over the years, with the median WQI moving between the 'poor' and 'very good' categories. However, this catchment consists of only three sites that may not a thorough representation of the catchment.
- Linwood Canal: some improvements over time, with the median WQI predominantly in the 'poor' category. However, this catchment consists of only one site that may not a thorough representation of the catchment.

Table 5. Water Quality Index (WQI) scores at each site for the monitoring period of January to December 2017. Additional water quality categories not represented by sites in 2017 are 'very poor' (<40) and 'very good' (≥90).

Catchment	Site	WQI	Water Quality Category
Ōpāwaho/ Heathcote	Haytons Stream at Retention Basin	44	Poor
Ōpāwaho/ Heathcote	Curletts Road Stream at Motorway	46	Poor
Ōpāwaho/ Heathcote	Curletts Road Stream Upstream of Heathcote River	50	Poor
Ōpāwaho/ Heathcote	Heathcote River at Opawa Road/Clarendon Terrace	54	Poor
Ōpāwaho/ Heathcote	Cashmere Stream at Worsleys Road	57	Poor
Ōpāwaho/ Heathcote	Heathcote River at Catherine Street	57	Poor
Ōpāwaho/ Heathcote	Heathcote River at MacKenzie Avenue	58	Poor
Ōpāwaho/ Heathcote	Heathcote River at Ferrymead Bridge	58	Poor
Ōpāwaho/ Heathcote	Heathcote River at Tunnel Road	59	Poor
Ōpāwaho/ Heathcote	Heathcote River at Bowenvale Avenue	60	Poor
Ōpāwaho/ Heathcote	Heathcote River at Ferniehurst Street	60	Poor
Pūharakekenui/ Styx	Kā Pūtahi Creek at Blakes Road	61	Poor
Ōpāwaho/ Heathcote	Heathcote River at Rose Street	61	Poor
Ōtākaro/ Avon	Addington Brook	66	Poor
Ōtākaro/ Avon	Dudley Creek	68	Poor
Linwood Canal	Linwood Canal/City Outfall Drain	69	Poor
Huritini/ Halswell	Halswell River at Akaroa Highway (Tai Tapu Road)	70	Poor
Huritini/ Halswell	Nottingham Stream at Candys Road	70	Fair
Pūharakekenui/ Styx	Kā Pūtahi Creek at Belfast Road	70	Fair
Ōpāwaho/ Heathcote	Heathcote River at Templetons Road	71	Fair
Ōtākaro/ Avon	Avon River at Avondale Road Bridge	71	Fair
Ōtākaro/ Avon	Avon River at Pages/Seaview Bridge	71	Fair
Ōtākaro/ Avon	Avon River at Bridge Street	71	Fair
Ōtūkaikino	Wilsons Stream	73	Fair
Huritini/ Halswell	Knights Stream at Sabys Road	73	Fair
Ōtākaro/ Avon	Horseshoe Lake Discharge	74	Fair
Ōtākaro/ Avon	Riccarton Main Drain	75	Fair
Ōtākaro/ Avon	Avon River at Dallington Terrace/Gayhurst Road	76	Fair
Ōpāwaho/ Heathcote	Cashmere Stream at Sutherlands Road	76	Fair
Pūharakekenui/ Styx	Styx River at Richards Bridge	76	Fair
Pūharakekenui/ Styx	Smacks Creek at Gardiners Road	77	Fair
Pūharakekenui/ Styx	Styx River at Gardiners Road	77	Fair
Pūharakekenui/ Styx	Styx River at Marshland Road Bridge	79	Fair
Pūharakekenui/ Styx	Styx River at Harbour Road Bridge	79	Fair
Ōtākaro/ Avon	Avon River at Manchester Street	82	Good
Ōtūkaikino	Ōtūkaikino Creek at Omaka Scout Camp	84	Good
Pūharakekenui/ Styx	Styx River at Main North Road	84	Good
Ōtākaro/ Avon	Avon River at Mona Vale	86	Good

Catchment	Site	WQI	Water Quality Category
Ōtākaro/ Avon	Avon River at Carlton Mill Corner	86	Good
Ōtākaro/ Avon	Wairarapa Stream	88	Good
Ōtākaro/ Avon	Waimairi Stream	89	Good
Ōtūkaikino	Ōtūkaikino River at Groynes Inlet	89	Good

Table 6. Best and worst catchments and sites for the monitoring period January to December 2017, based on the Water Quality Index (WQI). **Red** = Ōtākaro/ Avon River catchment, **orange** = Ōpāwaho/ Heathcote River catchment, **blue** = Pūharakekenui/ Styx River catchment, **green** = Ōtūkaikino River catchment, **purple** = Huritini/ Halswell River catchment and black = Linwood Canal.

Placing	Best Sites		Worst Sites	
	Catchment Scale	Site Scale	Catchment Scale	Site Scale
	Ōtūkaikino River (median WQI = 84)	Ōtūkaikino River at Groynes Inlet Waimairi Stream (WQI = 89)	Ōpāwaho/ Heathcote River (median WQI = 58)	Haytons Stream at Retention Basin (WQI = 44)
	Pūharakekenui/ Styx River (median WQI = 77)	Wairarapa Stream (WQI = 88)	Linwood Canal (WQI = 69)	Curletts Road Stream at Motorway (WQI = 46)
	Ōtākaro/ Avon River (median WQI = 75)	Avon River at Carlton Mill Corner Avon River at Mona Vale (WQI = 86)	Huritini/ Halswell River (median WQI = 70)	Curletts Road Stream Upstream of Heathcote River (WQI = 50)

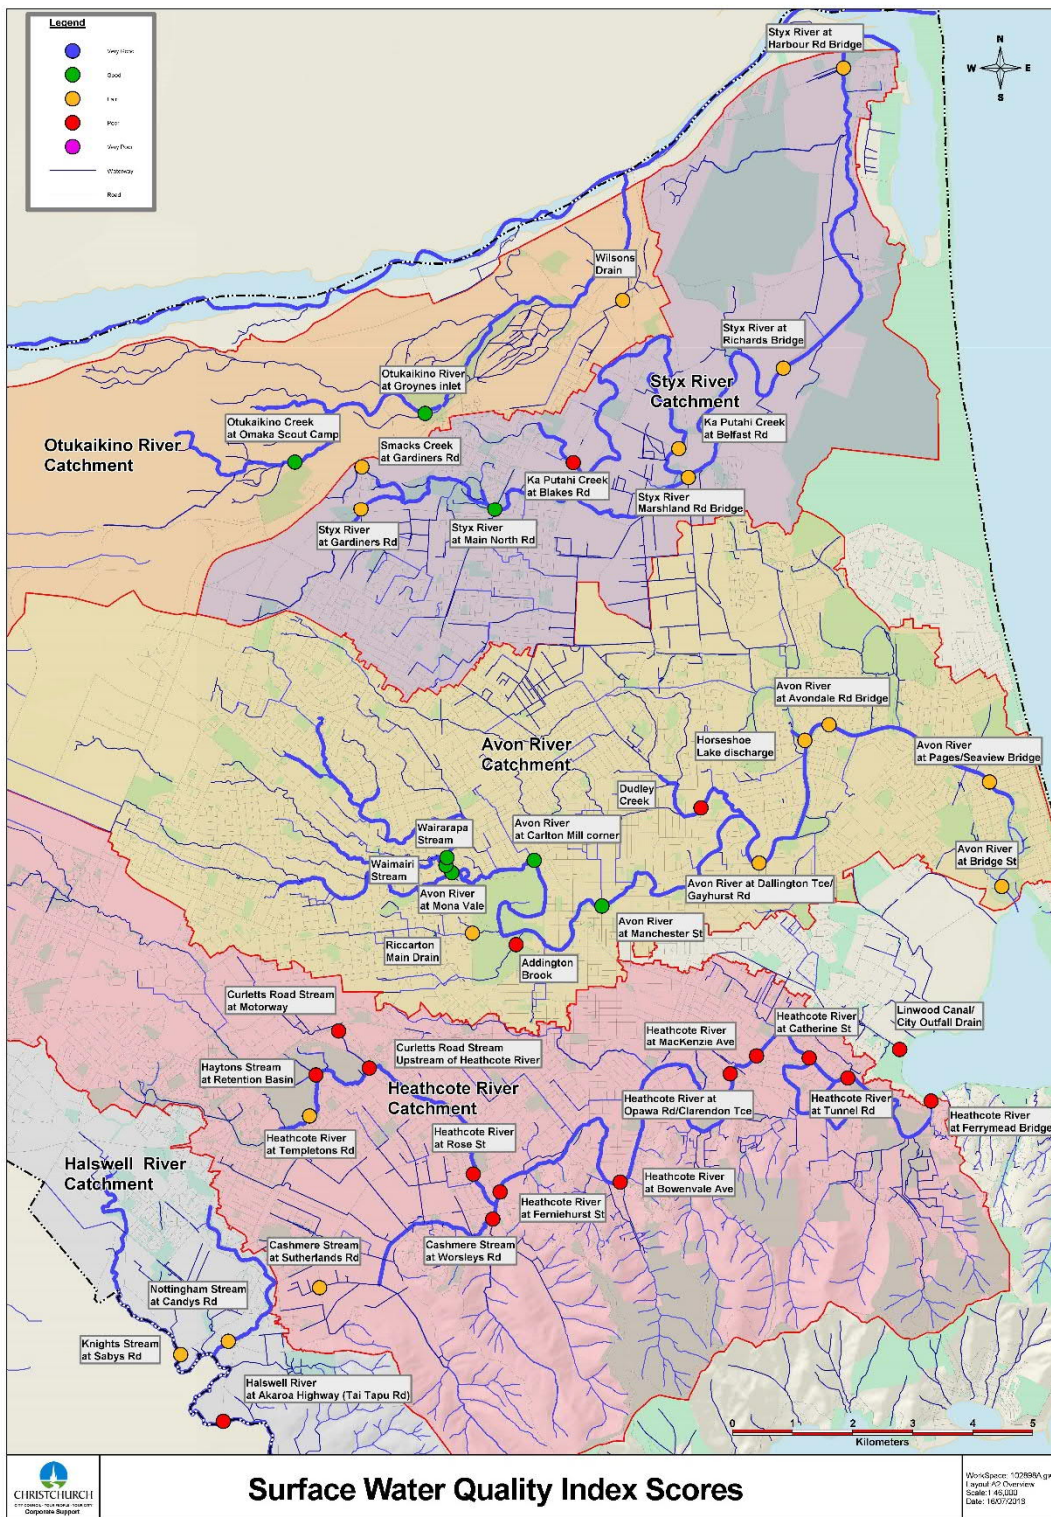


Figure 11. Water Quality Index (WQI) categories for 2017 at the Christchurch City Council water quality monitoring sites. No sites recorded a Very Poor or Excellent category.

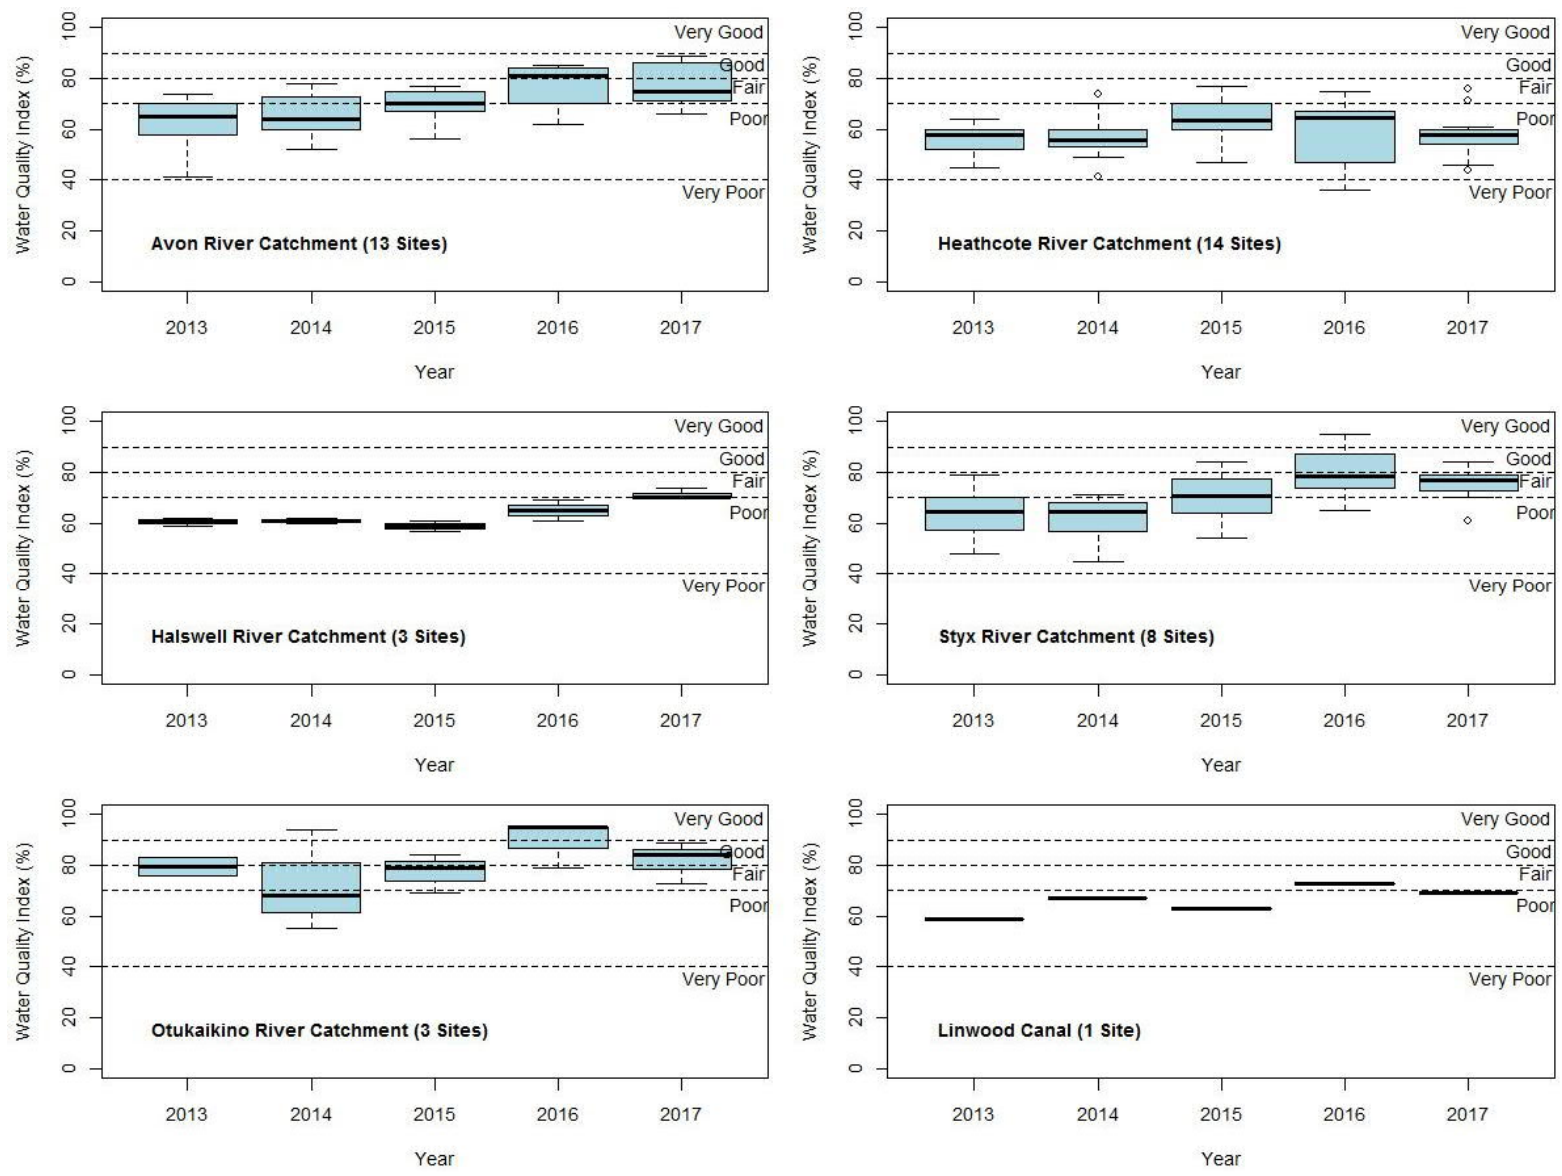


Figure 12. Boxplots of Water Quality Index for each catchment for the 2013 to 2017 monitoring years

4 Results: Wet Weather Monitoring

4.1 Rainfall

- The amount of rainfall that had fallen for the first and second wet weather event before samples were taken was 12 mm and 33 mm, respectively (Figure 13).
- The first sampling event therefore occurred during the First Flush (up 25 mm), but the second was after this time.
- The July event was preceded by 16 mm of rain the previous day; the August event occurred after four dry days (where daily rainfall totals were less than 1 mm).
- Due to these two events not meeting all the criteria for a wet weather event, levels may be lower at these sites than what typically occurs in the waterways during wet weather.

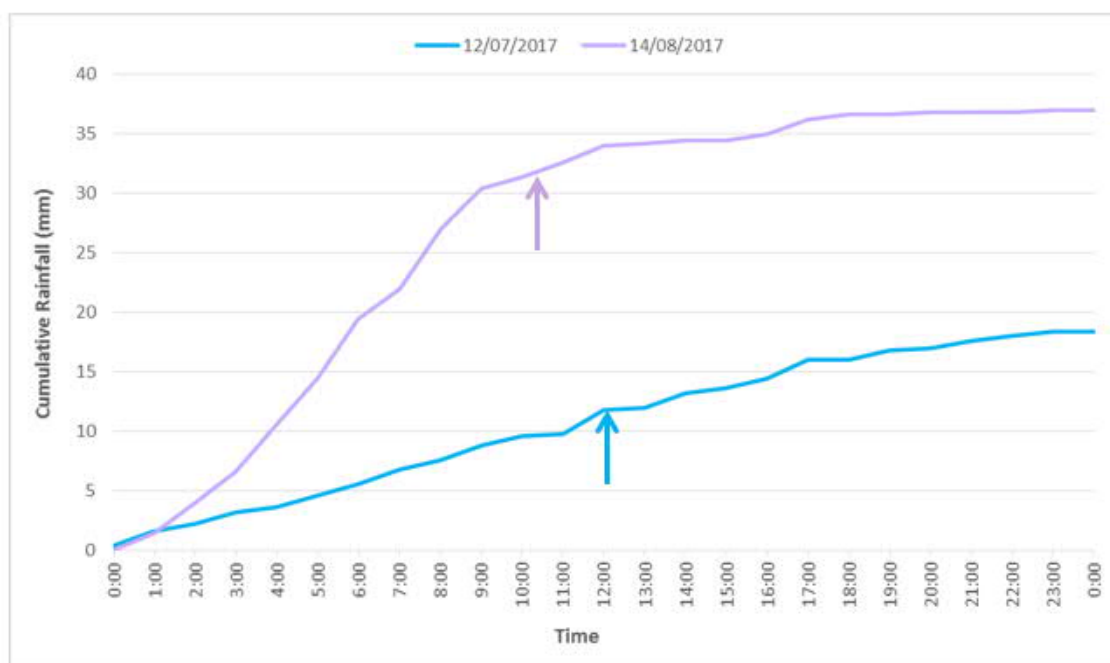


Figure 13. Rainfall during the wet weather events of 12/07/2017 (blue line) and 14/08/2017 (purple line), with approximate times of sampling arrowed

4.2 Water Quality Parameters

- Parameter concentrations were generally similar between monitoring events or higher during the second event (Figures 14 to 21).
- Wilsons Drain typically recorded much higher levels compared to the other two sites (e.g. for copper, zinc, conductivity, TSS, turbidity, BOD₅, ammonia, nitrate/NNN/DIN, DRP and arsenic).
- The guidelines were not met for:
 - copper and zinc in Wilsons Drain during both events

- TSS at the Ōtūkaikino River at Omaka and Wilsons Drain sites during the second event
- Turbidity at the Ōtūkaikino River at Omaka site during the first event and in Wilsons Drain during both events (recording a very high value in the second event of 180 NTU – 32 times higher than the guideline level)
- Dissolved oxygen at Ōtūkaikino at Omaka during the second event
- BOD₅ in Wilsons Drain during the second event
- NNN generally at all sites during both events
- DIN at Wilsons Drain during the first event
- DRP generally at all sites during both events (with Wilsons Drain recording a high value of 0.25 mg/L during the second event – 16 times higher than the guideline level)
- *E. coli* at the Ōtūkaikino at Omaka site during the first event (recording a very high value of 17,000 CFU/100ml – 31 times higher than the guideline level) and Wilsons Drain during both events (recording a high value of 6,100 CFU/100ml during the second event – 11 times higher than the guideline level)
- Levels were generally comparable to that recorded during the monthly monitoring, with the following exceptions:
 - Some parameters were much higher in Wilsons Drain during the wet weather monitoring (e.g. copper, zinc, TSS, turbidity, BOD₅, ammonia, DRP and *E. coli*)
 - pH levels were generally lower during the wet weather monitoring
 - TSS and turbidity levels at the Ōtūkaikino at Omaka site were much higher than that recorded during the monthly monitoring
 - BOD₅ and *E. coli* levels were higher at the Ōtūkaikino at Omaka site during the second wet weather event than the monthly monitoring
 - DRP concentrations were generally higher during the wet weather monitoring

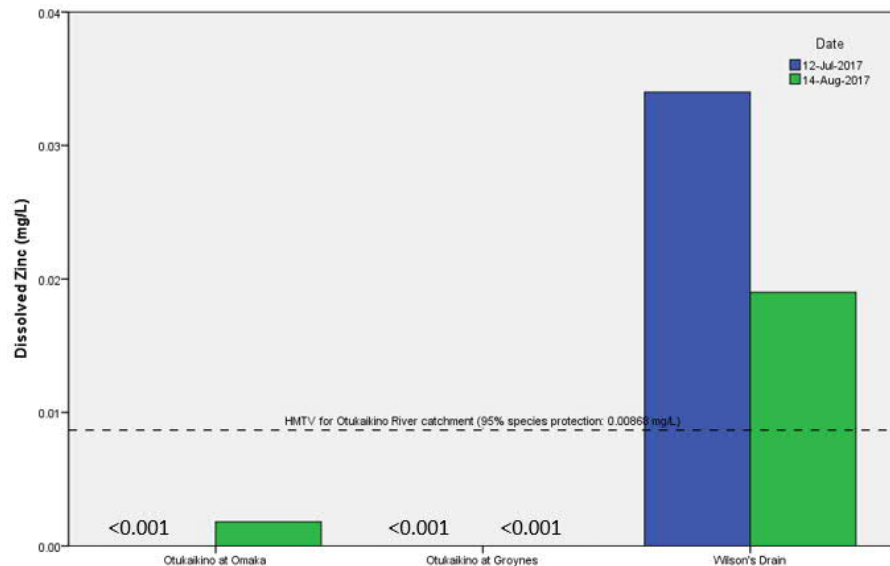
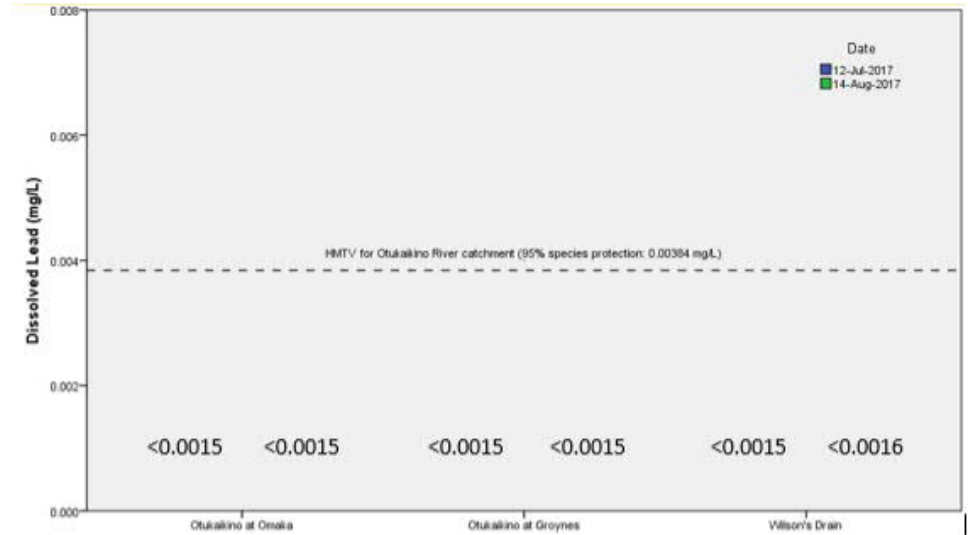
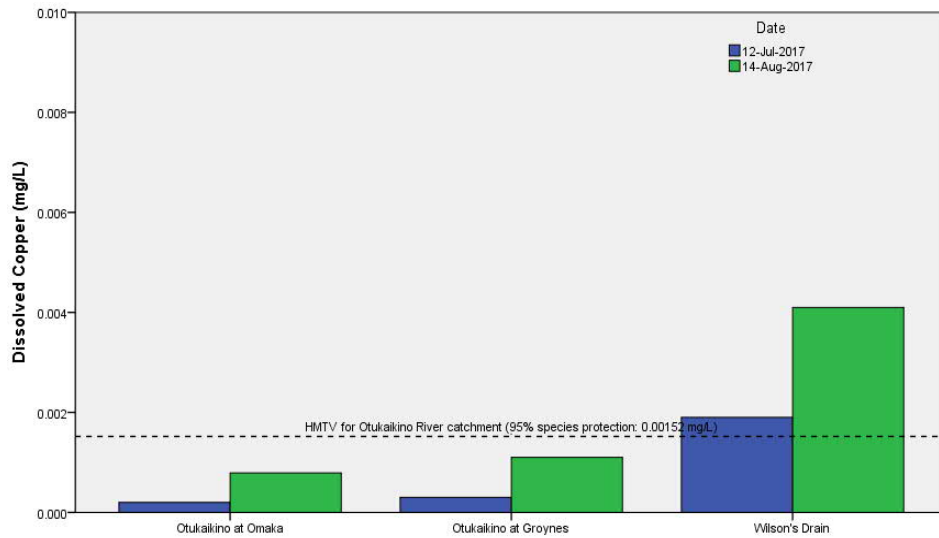


Figure 14. Dissolved copper (top left), lead (top right) and zinc (bottom left) levels in water samples taken from the Ōtūkaikino River catchment during two rain events. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger values (Environment Canterbury, 2017), which have been modified to account for water hardness (Hardness Modified Trigger Value = HMTV), as per the ANZECC (2000) guidelines methodology. The 95% protection HMTV for lead (0.00384 mg/L) is not visible because it is off the scale.

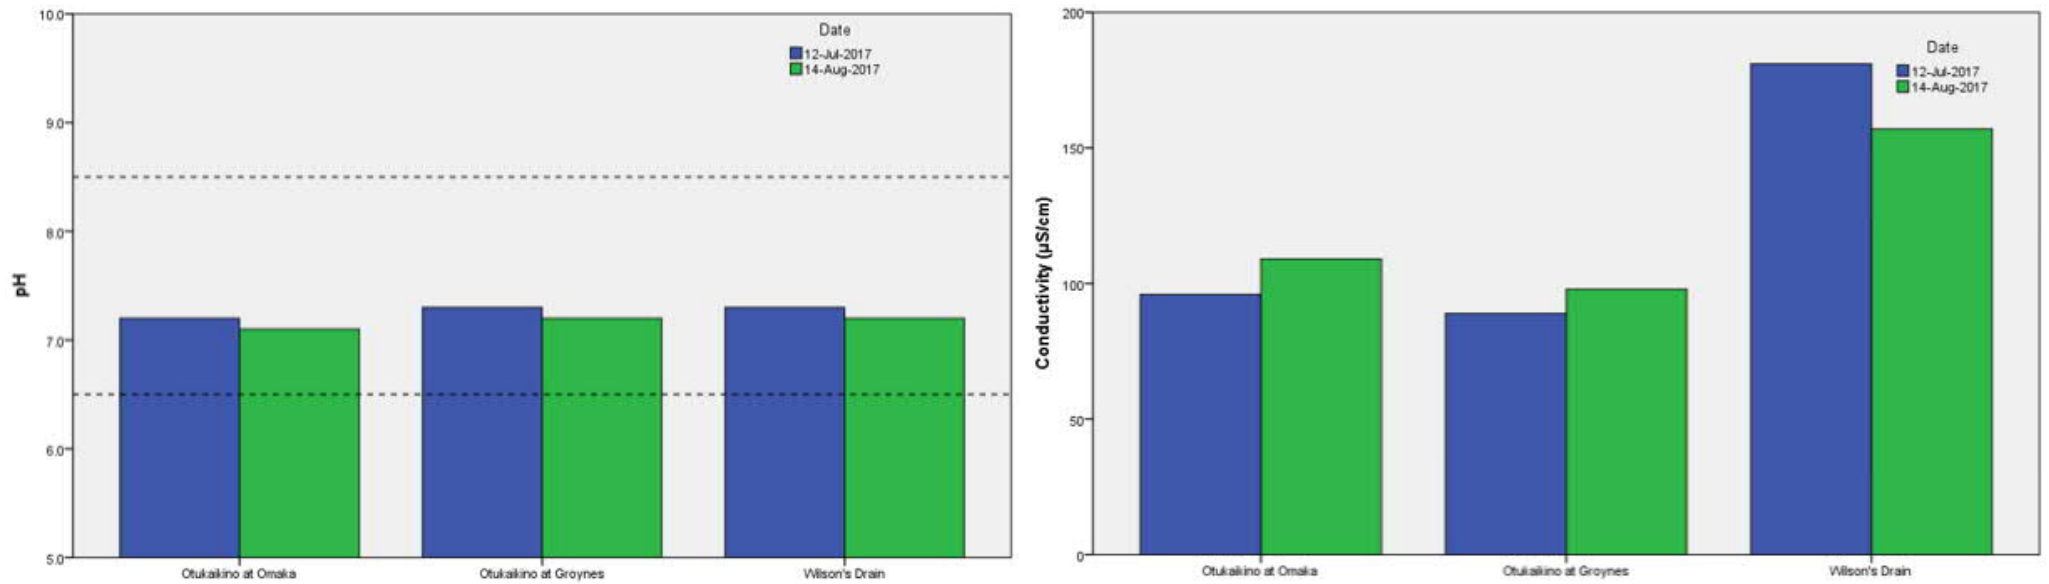


Figure 15. pH (left) and conductivity (right) levels in water samples taken from the Huritini/ Halswell River catchment during two rain events. Sites are ordered from upstream to downstream (left to right). The dashed lines on the pH graph represent the Land and Water Regional Plan lower (6.5) and upper (8.5) limits (Environment Canterbury, 2017).

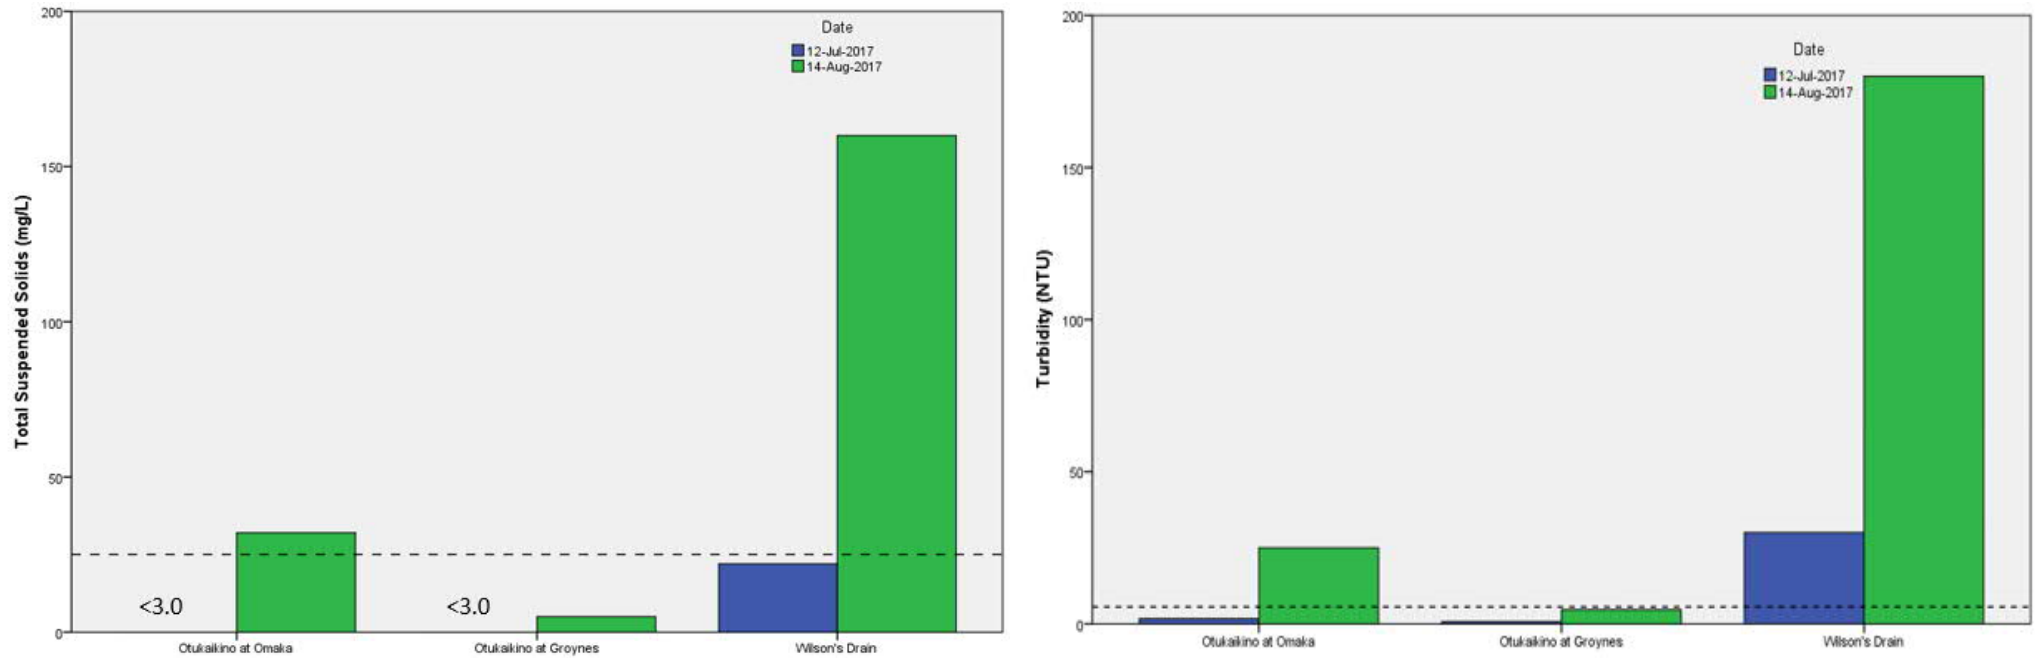


Figure 16. Total Suspended Solid (TSS; left) and turbidity (right) levels in water samples taken from the Ōtūkaiino River catchment during two rain events. Sites are ordered from upstream to downstream (left to right). On the TSS graph, the dashed line represents the guideline value of 25 mg/L. On the turbidity graph, the dashed line represents the ANZECC (2000) guideline value of 5.6 Nephelometric Turbidity Units (NTU). The Laboratory Limit of Detection for TSS was 3.0 mg/L and 0.1 NTU for turbidity.

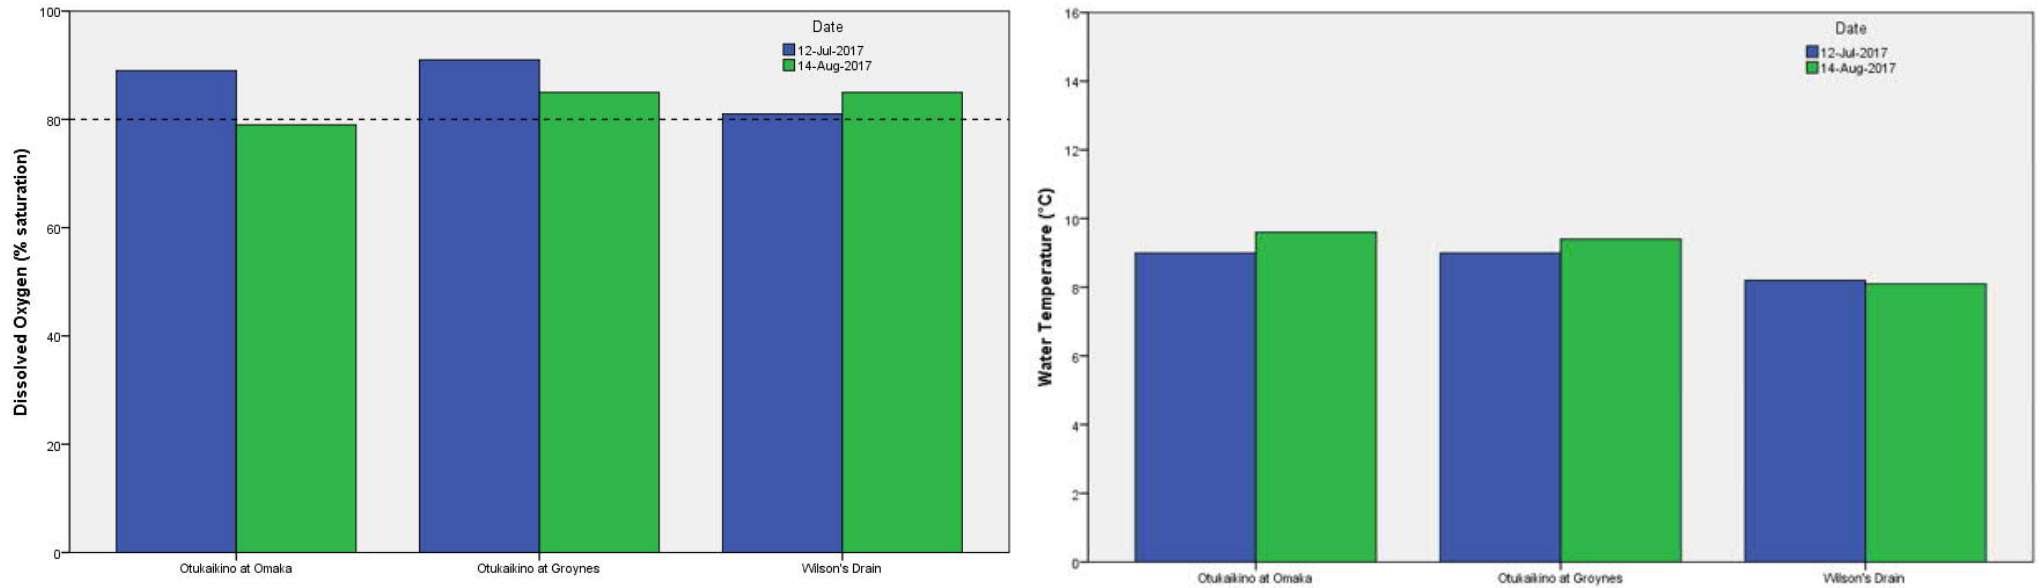


Figure 17. Dissolved oxygen (left) and water temperature (right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events. Sites are ordered from upstream to downstream (left to right). On the left graph, the dashed line represents the Waimakariri River Regional Plan minimum guideline value for all Ōtūkaikino sites (80%, Environment Canterbury, 2011). On the water temperature graph, the Waimakariri River Regional Plan maximum guideline value for all Ōtūkaikino sites is 25 °C (Environment Canterbury, 2011), which is not shown as this is equal to the top of the graph

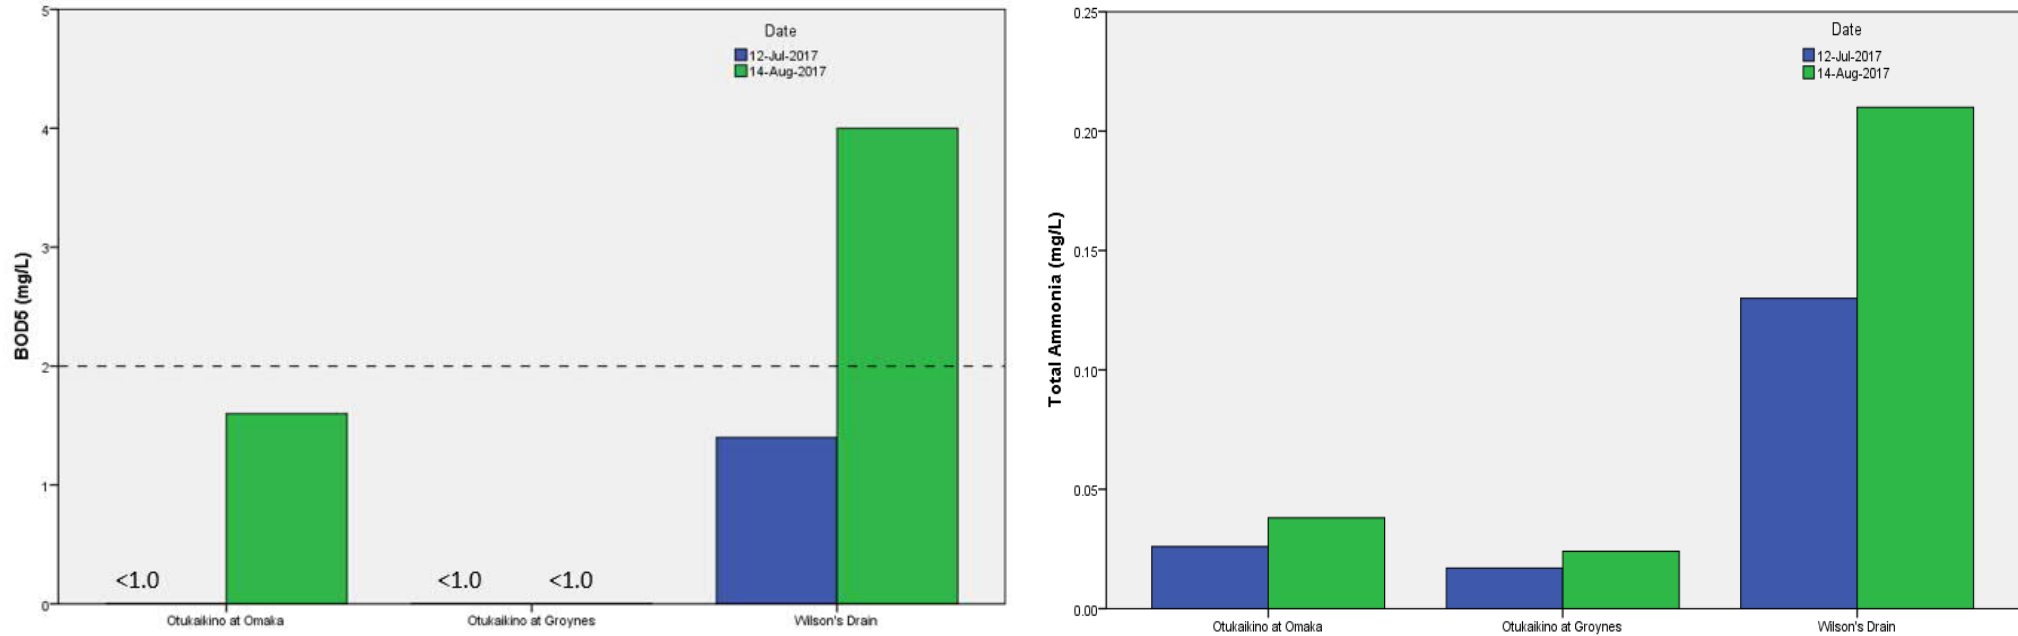


Figure 18. Biochemical Oxygen Demand (BOD₅; left) and total ammonia (right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events. Sites are ordered from upstream to downstream (left to right). On the BOD₅ graph, the dashed line represents the Ministry for the Environment guideline value (2 mg/L; Ministry for the Environment, 1992). For the ammonia graph, the Land and Water Regional Plan guideline value, adjusted in accordance with median pH level for the monitoring period (7.1; Environment Canterbury, 2017), is not visible as it is off the scale (2.09 mg/L). The Laboratory Limit of Detection for ammonia was 0.005 mg/L.

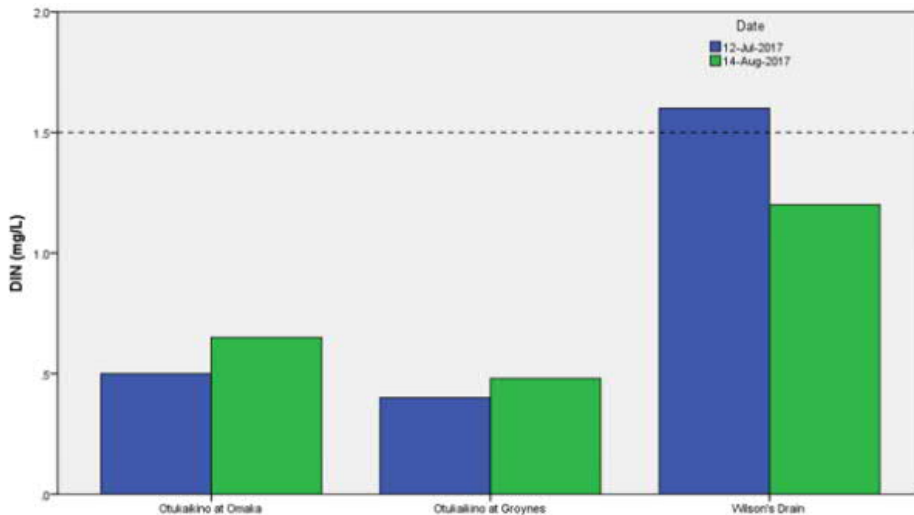
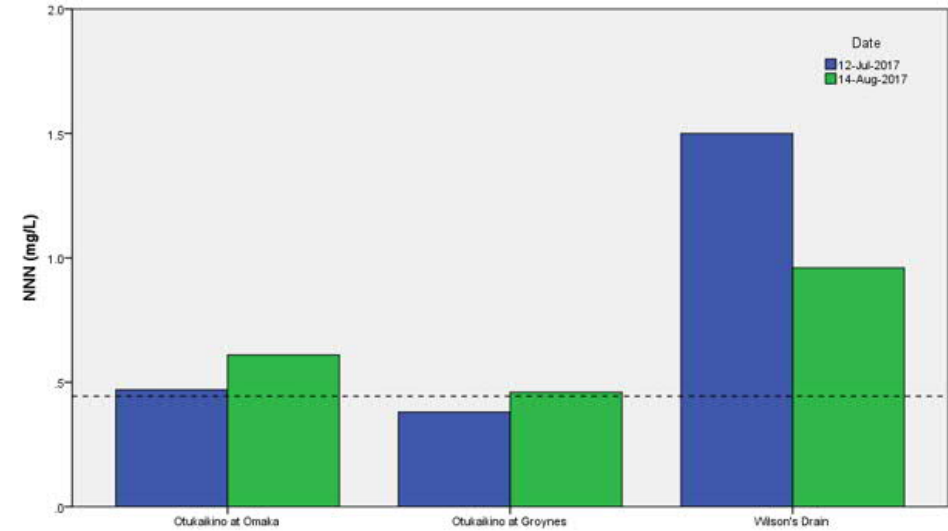
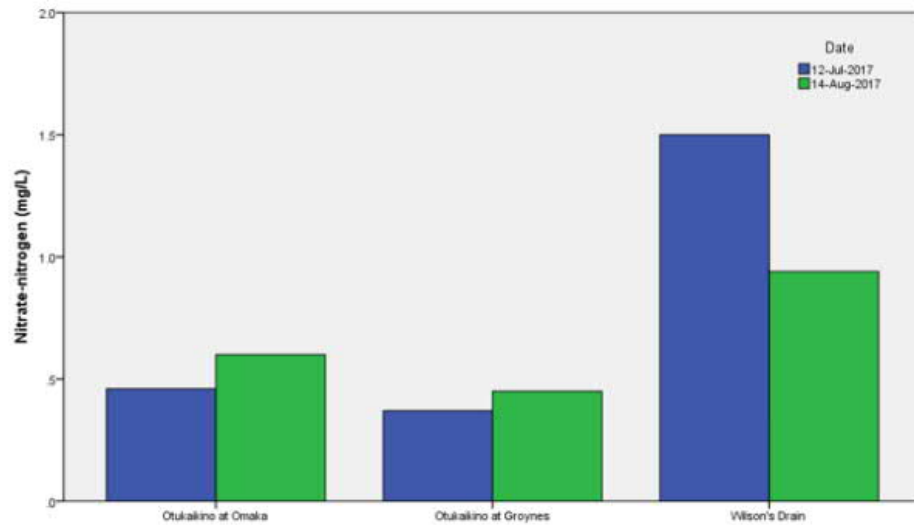


Figure 19. Nitrate (top left), Nitrate Nitrite Nitrogen (NNN; top right) and Dissolved Inorganic Nitrogen (DIN; bottom left) levels in water samples taken from the Ōtukaikino River catchment during two rain events. Sites are ordered from upstream to downstream (left to right). The nitrate guidelines of 3.8 mg/L (grading) and 5.6 mg/L (surveillance) are not shown as they are off the scale (Hickey, 2013). On the NNN graph, the dashed lines represent the ANZECC water quality guideline (0.444 mg/L; ANZECC, 2000). On the DIN graph, the dashed line represents the Land and Water Regional Plan trigger value of 1.5 mg/L for 'spring-fed – plains' waterways (Environment Canterbury, 2017). The Laboratory Limit of Detection for nitrate was 0.05 mg/L, NNN was 0.005 mg/L and DIN 0.02 mg/L.

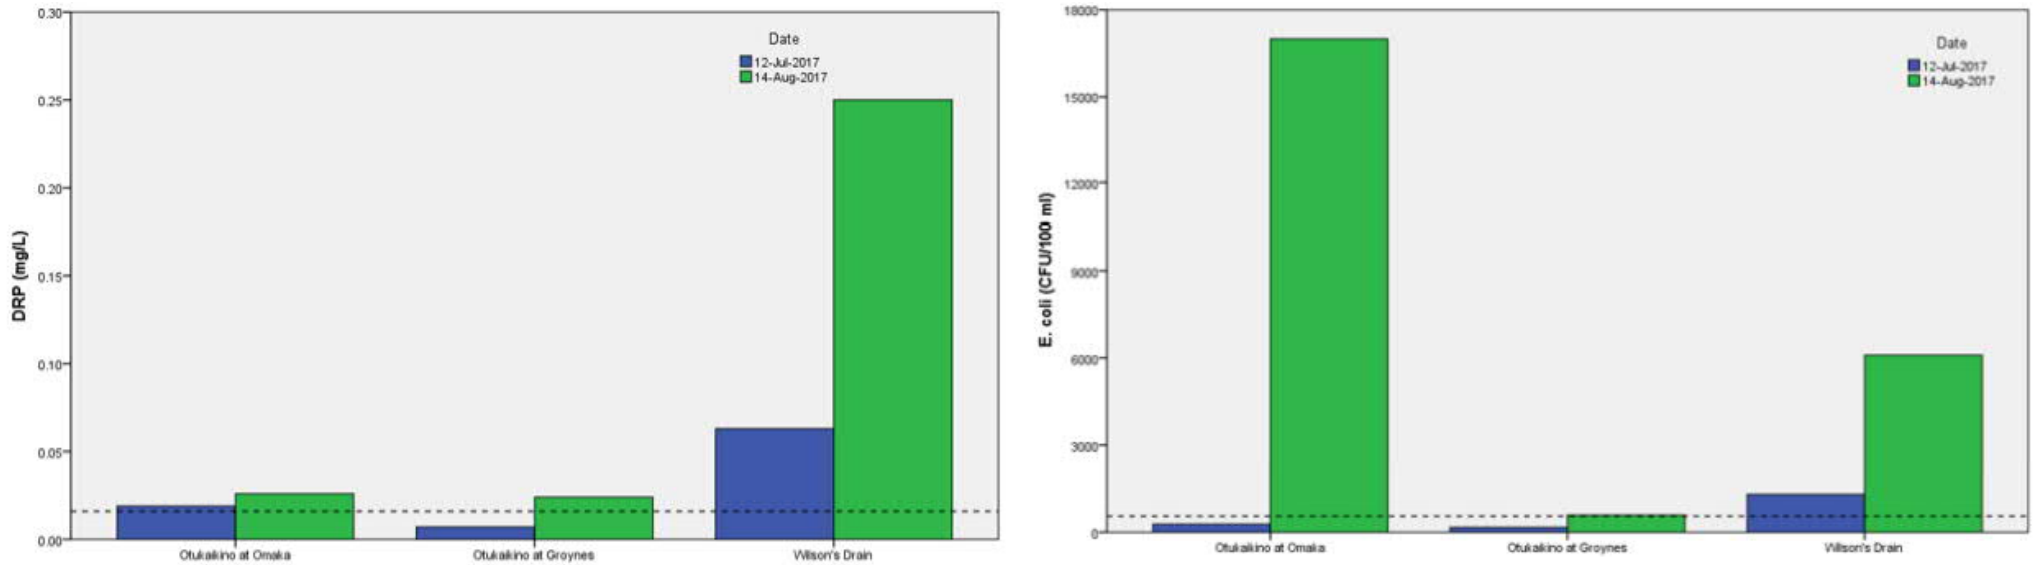


Figure 20. Dissolved Reactive Phosphorus (DRP; left) and *Escherichia coli* (right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events. Sites are ordered from upstream to downstream (left to right). On the DRP graph the dashed line represents the Land and Water Regional Plan trigger value of 0.016 mg/L for 'spring-fed – plains' waterways (Environment Canterbury, 2017). On the *E. coli* graph, the dashed lines represent the Land and Water Regional Plan trigger value of 550 CFU/100ml for 95% of samples for 'spring-fed – plains' waterways (Environment Canterbury, 2017). The Laboratory Limit of Detection for DRP was 0.003 mg/L. The Laboratory Limit of Detection for *E. coli* varied depending on the necessary dilution of the sample.

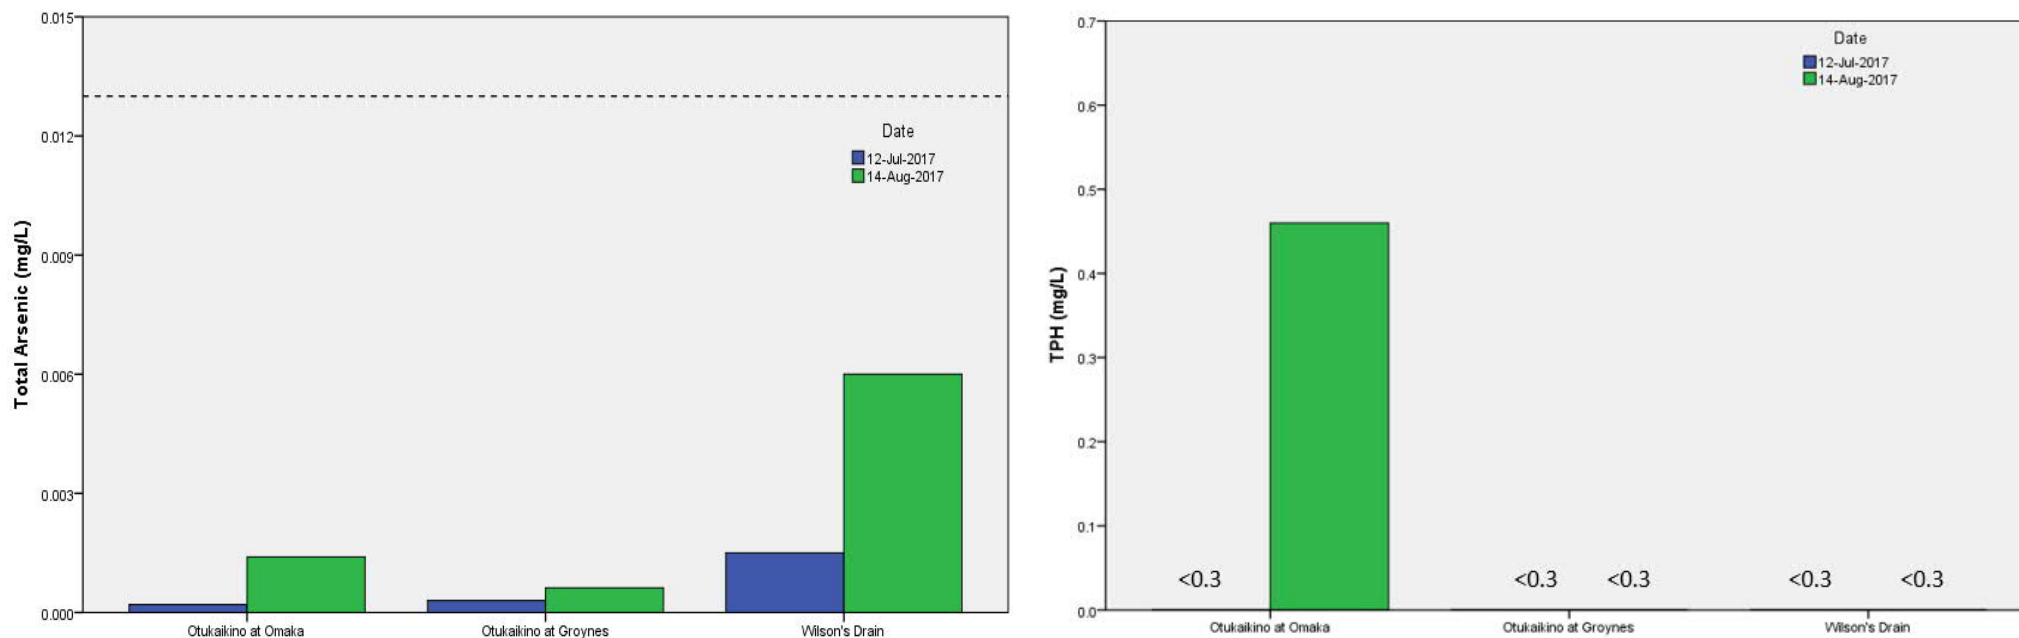


Figure 21. Total arsenic (left) and Total Petroleum Hydrocarbons (TPH; right) levels in water samples taken from the Ōtūkaikino River catchment during two rain events. Sites are ordered from upstream to downstream (left to right). On the arsenic graph the dashed line represents the Land and Water Regional Plan trigger value of 0.013 mg/L for ‘spring-fed – plains’ waterways for arsenic (V) (Environment Canterbury, 2017). The Laboratory Limit of Detection for TPH was 0.3 mg/L.

5 Discussion

There were a number of parameters within the waterways that were recorded at levels unlikely to cause adverse effects, including dissolved lead, pH, water temperature, total ammonia and nitrate. However, 20% of samples (1,498 of 7,335 samples) did not meet the guideline levels. The parameters that recorded values well outside the guidelines across most sites included NNN, DIN, DRP and *E. coli*. There were also some parameters that generally recorded levels within the guidelines, but on a number of occasions, or regularly at a small number of sites, recorded concentrations outside the guidelines, including dissolved copper, dissolved zinc, TSS, turbidity, dissolved oxygen and BOD₅.

The concentrations of parameters have mostly remained steady over time (55%), but some improvements in water quality were recorded (27%) and some declines (9%). The following temporal trends of note were recorded:

- A 46% increase in NNN at the Ōtūkaikino Creek at Omaka Scout Camp site, due to some high peaks in concentrations during 2017. This indicates that there are still some nutrient sources entering the stream from agricultural land use in the upper catchment.
- A 102% reduction in dissolved lead at the Halswell Retention Basin Outlet, driven by high and peaky concentrations prior to 2016, with concentrations reducing to below the LOD since 2016. This is most likely a delayed result of the introduction of unleaded petrol, which can accumulate in sediments. Similar decreasing trends were recorded for dissolved lead at the Cashmere Stream at Worsleys Road and Dudley Creek sites (52% and 49%, respectively).
- A 45% reduction in both zinc and BOD₅ at Knights Stream, driven by peak concentrations reducing from 2015. These decreases may be due to riparian planting in the vicinity of the monitoring site a few years ago by ECan. A riffle was also constructed at this location by the CCC in 2016 to allow water flow monitoring, which likely aerates the water, and flushes contaminated water and sediment through the system.
- A 56% reduction in dissolved copper at Curletts Road Stream Upstream of Heathcote River, which is due to lower peak concentrations since monitoring began in 2011. This is likely due to improved catchment management practices, through a joint Christchurch West-Melton Zone Committee, CCC and ECan project.

The results of the temporal trends do not indicate that there have been any lasting effects on sediment levels in the water at these monitoring sites due to (1) the 2010 Christchurch earthquake sequence, or (2) the 2017 Port Hills fires and subsequent erosion. However, sediment cover and depth of the streambed may have increased due to these two events, and this is not covered by this water quality monitoring programme, but addressed by other aquatic ecology monitoring undertaken by the CCC. In addition, turbidity levels were higher in the Heathcote River catchment this year compared to last monitoring year, which may be due to the wetter year in 2017, but could also be early signs of increased sediment inputs.

Based on the WQI, the majority of sites had 'poor' or 'fair' water quality. The Ōpāwaho/Heathcote River and Linwood Canal catchments generally had 'poor' water quality. All other catchments generally had 'fair' to 'good' water quality. The Ōtūkaikino River recorded the best water quality out of all the catchments. The best site was tied between the Ōtūkaikino River at Groyne Inlet and Waimairi Stream sites. The catchment

recording the worst water quality was the Ōpāwaho/ Heathcote River, with the 11 worst sites all being from this catchment. The worst site was Haytons Stream at Retention Basin, followed by Curletts Road Stream at Motorway and Curletts Road Stream Upstream of Heathcote River. The contaminants of particular concern for these sites were copper, zinc, turbidity, DO, BOD₅, ammonia and DRP. The Ōtākaro/ Avon River and Pūharakekenui/ Styx River catchments recorded significant improvements in WQI over time, whereas the other catchments showed limited change.

The six waterway sites located in proximity to stormwater outfalls did not appear to record differing results compared to the other waterway sites. This could be due to (a) many of the other sites also being located near outfalls, (b) the monthly monitoring not often being carried out during the First Flush of a wet weather event or (c) stormwater not having any noticeable effects in these locations. The exception to this being Curletts Road Stream at Motorway, which generally recorded higher levels in contaminants (for copper, zinc, pH, dissolved oxygen and total ammonia) compared to the downstream site on this waterway, and other waterway sites. Haytons Stream at Retention Basin also recorded higher levels of copper, zinc, BOD₅ and DRP compared to the other waterway sites.

The two Halswell Retention Basin sites (Inlet and Outlet) generally recorded greater concentrations of parameters than the waterway sites. In particular, the basin recorded high levels of copper, zinc, pH, TSS, BOD₅, ammonia and DRP. This is to be expected given the predominantly industrial stormwater input into the basins and that the waterways are subjected to dilution from baseflow. The outlet generally recorded lower levels than the inlet. Lower levels at the outlet might be due to the treatment ability of the basin, but as these samples were taken at the same time, it may just be a reflection that peak contaminant levels had not reached the outlet yet. Of note, pH levels were very high at the outlet and much higher than the inlet, indicating that the basin processes are causing basic conditions. These monitoring results for the basin are similar to that recorded in previous years (e.g., Margetts & Marshall, 2015; Margetts & Marshall, 2016; Marshall & Burrell, 2017).

For the wet weather monitoring of the Ōtūkaikino River catchment, contaminants recorded at much higher levels compared to the monthly monitoring included copper, zinc, TSS, turbidity, BOD₅, ammonia, DRP and *E. coli*. Wilsons Drain typically recorded much higher levels (e.g. for copper, zinc, conductivity, TSS, turbidity, BOD₅, ammonia, nitrate/NNN/DIN, DRP and arsenic) than the two other sites (Ōtūkaikino River at Omaka Scout Camp and Ōtūkaikino River at the Groynes). These results may not represent the highest level of stormwater inputs, as the sampling did not meet all of the criteria for a wet weather event.

The results of this year's monitoring is largely consistent with that recorded in previous years (Dewson, 2012; Dewson, 2013; Whyte, 2013a; Whyte, 2013b; Whyte, 2014a; Whyte, 2014b; Margetts, 2014a; Margetts & Marshall, 2015; Margetts & Marshall, 2016; Marshall & Burrell, 2017). This indicates that many of Christchurch's waterways are both historically and currently subjected to contamination, potentially from stormwater, wastewater and other inputs (e.g. agriculture, waterfowl faeces and industrial discharges). These parameters may be having short-term and long-term adverse effects on biota (i.e. DIN, copper, zinc, TSS/turbidity, dissolved oxygen and BOD₅), may encourage the proliferation of aquatic plants and/or algae (i.e. NNN and DRP), may indicate human health risks from contact recreation (i.e. *E. coli*) and may affect water clarity/aesthetics (TSS/turbidity). These results support the international Urban Stream Syndrome (Walsh et al., 2005), whereby lower water quality is recorded internationally in urban (particularly industrial) areas (e.g. Ōtākaro/ Avon and Ōpāwaho/ Heathcote

River catchments) and generally better water quality is recorded in rural areas (e.g. Ōtūkaikino River catchment).

The sites and parameters of concern in this report should be the focus of improved catchment management practices in Christchurch. Such practices could include better treatment and source control of stormwater contaminants, and redirection of trade waste (e.g. vehicle wash-down water) to the sewer, instead of the stormwater system. Water quality in most of these catchments should improve over time with the instigation of CCC SMPs, ECan catchment pollution projects, and other targeted programmes by CCC and through the Canterbury Water Management Strategy. Improvements should also occur with the progression of rebuild activities, particularly as the level of earthworks and dewatering activity decreases, and new stormwater treatment facilities are built.

6 Recommendations

- Haytons Stream and Curletts Road Stream should remain as priority areas for improved contaminant source control and stormwater treatment:
 - CCC and ECan are currently working with landowners to reduce contaminants entering stormwater systems or waterways directly. Industrial site audits are proving a good avenue for targeting key contaminant sources.
 - CCC has committed to new or upgraded stormwater treatment facilities in both of these catchments, with construction currently underway. Dedicated wet-weather stormwater sampling is recommended to assess the effectiveness of these new and upgraded facilities.
- Investigations into the sources of particularly poor water quality (regular and wet weather) should be carried out for the following waterways:
 - Nottingham Stream (copper, lead, zinc, arsenic, TSS/turbidity, BOD₅, DRP and *E. coli*), based on wet weather monitoring last year (Marshall & Burrell, 2017).
 - Wilsons Stream (copper, zinc, TSS/turbidity, BOD₅, NNN, DIN, DRP and *E. coli*), based on this year's monthly and wet weather monitoring.
 - Kā Pūtahi Creek (ammonia, BOD₅ and *E. coli*), based on this and previous year's monitoring.
 - Ōtūkaikino Creek at Omaka Scout Camp (NNN and *E. coli*), based on this year's monitoring report.
- Catchment management practices should also focus on the Ōtūkaikino River to ensure the good water quality in this catchment is maintained, particularly if development pressure increases in the future. This is particularly important given the recent finding that the biological community is degrading (due to the loss of stoneflies) (Blakely & Noakes, 2017; Noakes & Blakely, 2017):
 - It has been recommended to the Christchurch – West Melton Zone Committee by CCC (Dr Belinda Margetts) and ECan (Michele Stevenson) staff that a catchment management plan is developed. This plan should include input from CCC, ECan, rūnanga, landowners and other stakeholders, and refer to other documents, such as the Outer Christchurch Stormwater Management Plan, which is due to be developed shortly.
 - However, the limited resources available to develop this plan needs to be addressed first. There are some immediate actions that could be taken prior to a catchment plan being implemented, such as identifying and eliminating sources of contaminants, and carrying-out riparian planting. Significant riparian planting has already been carried out in this catchment by the CCC and more is planned in coming years, and this should be supplemented to ensure good coverage of riparian vegetation.

- Investigations should be carried out to identify how to reduce faecal contamination of waterways across the city:
 - Faecal source tracking has indicated that waterfowl are a major source of faecal contamination during dry and wet weather (Moriarty & Gilpin, 2015), but waterfowl control within the city may be unpopular with some people. With the increase in public interest in making rivers swimmable (i.e., *E. coli* levels below guidelines), this is an area of potential conflict that needs to be carefully worked through. The Christchurch-West Melton Zone Committee could be a good avenue for such discussions.
- Determination of more cost-effective and robust methods for wet weather sampling of waterways:
 - The current grab sampling techniques are limited by the ability to (a) predict when the 'First Flush' will be and (b) to get out on site at the right time to catch the 'First Flush' (e.g. sometimes this is at night). This is shown in many of the past monitoring reports, where it has been difficult to achieve the wet weather event criteria. Autosamplers are a better option, but are expensive, are generally only installed temporarily (so need to be set up in anticipation), are bulky and require a good deal of space, and can consequently be subjected to vandalism.
 - CCC is currently investigating the use of Thermo Scientific™ Nalgene™ Storm Water Sampler bottles to undertake sampling. NIWA is also carrying out an Envirolink research programme on potential passive sampling techniques, including these devices, which will determine more robust and cost-effective methods for monitoring wet weather events.
 - Many of the contaminants of concern in this report are sourced from stormwater (e.g. copper, zinc and sediment). The current monitoring programme has enabled CCC to describe the state of the environment and identify areas of poor water quality. However, the majority of monthly samples are not taken during rain events, so they do not specifically measure acute stormwater impacts, only chronic effects. Once an effective passive sampling technique is determined, this will allow a more detailed wet weather monitoring programme, to better identify stormwater issues and monitor the effectiveness of stormwater treatment devices.

7 Conclusions

Christchurch City waterways generally recorded a WQI of 'poor' or 'fair' this monitoring year. The Ōpāwaho/ Heathcote River catchment recorded the poorest water quality, and the worst site was Haytons Stream at Retention Basin, followed by Curletts Road Stream at Motorway and Curletts Road Stream Upstream of Heathcote River. The Ōtūkaikino River catchment recorded the best water quality, and the best site was tied between the Ōtūkaikino River at Groynes Inlet and Waimairi Stream. The Ōtākaro/ Avon River and Pūharakekenui/ Styx River catchments recorded significant improvements in WQI over time, whereas the other catchments showed limited change. The contaminants of most concern were nitrogen, phosphorus and *E. coli*, as well as dissolved copper, dissolved zinc, TSS, turbidity, dissolved oxygen and BOD₅ at certain sites. The concentrations of parameters have mostly remained steady over time, with some improvements and few declines in water quality recorded. The results of this year's monitoring is largely consistent with that recorded in previous years.

8 Acknowledgements

CCC laboratory staff collected the monthly monitoring samples and EOS Ecology collected the wet weather monitoring samples. Mike Bourke (CCC) and Michele Stevenson (ECan) provided helpful comments on a draft of this report. Dr James Ross (Lincoln University) also provided invaluable advice on the Water Quality Index statistical modelling.

9 References

ANZECC (Australian and New Zealand Environment and Conservation Council, ANZECC, and Agriculture and Resource Management Council of Australia and New Zealand, ARMCANZ), 2000. Australian and New Zealand guidelines for fresh and marine water quality. Volume 1: The guidelines. ANZECC & ARMCANZ, Artarmon, New South Wales.

Biggs, B.J.F., 1988. Algal proliferations in New Zealand's shallow stony foothills-fed rivers: towards a predictive model. *Verhandlungen der Internationalen Vereinigung für Theoretische und Angewandte Limnologie* 23: 1405-1411.

Biggs, B.J.F., 2000. The New Zealand periphyton guideline: detecting, monitoring and managing enrichment of streams. Ministry for the Environment, Wellington.

Blakely, T. & Noakes, K., 2017. Intensive survey of EPT fauna within Ōtūkaikino Creek. Prepared by Boffa Miskell Limited for Christchurch City Council, Christchurch. TRIM # = 18/164998.

Canadian Council of Ministers of the Environment, 2001. Canadian water quality guidelines for the protection of aquatic life: CCME Water Quality Index 1.0, Technical Report. In: *Canadian environmental quality guidelines, 1999*,. Winnipeg: Canadian Council of Ministers of the Environment.

Christchurch City Council, 2003. Waterways, wetlands and drainage guide. Part B: design. Christchurch City Council, Christchurch.

Collier, K.J., Ball, O.J., Graesser, A.K., Main, M.R. & Winterbourn, M.J., 1990. Do organic and anthropogenic acidity have similar effects on aquatic fauna? *Oikos* 59: 33-38.

Crawley, M.J., 2007. The R book. John Wiley & Sons Ltd, West Sussex, 942 pp.

Crowe, A. & Hay, J., 2004. Effects of fine sediment on river biota. Report No. 951, prepared for Motueka Integrated Catchment Management Programme. Cawthron Institute, Nelson.

Dewson, Z., 2012. Christchurch Rivers water quality monitoring: annual results summary, May 2011 – April 2012. Christchurch City Council, Christchurch. TRIM # = 13/472519.

<http://ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/City-Wide-Surface-Water-Quality-2012-PDF-3.36-MB.PDF>

Dewson, Z., 2013. South-West Stormwater Management Plan: Surface water quality monitoring, annual results summary, January – December 2012. Christchurch City Council, Christchurch.

<http://ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/South-West-SMP-Surface-Water-Quality-2013-PDF-0.58-MB.pdf>

Dewson, Z. & Rodrigo, Y., 2009. IGSC monitoring plan. Prepared by MWH for Christchurch City Council, Christchurch. TRIM # = 10/123753.

Environment Canterbury, 2009. Review of proposed NRRP water quality objectives and standards for rivers and lakes in the Canterbury region. Report No. R09/16. Environment Canterbury, Christchurch.

Environment Canterbury, 2011. Waimakariri River Regional Plan – Incorporating Change 1 to the Waimakariri Regional Plan. Environment Canterbury, Christchurch.

Environment Canterbury, 2017. Canterbury Land and Water Regional Plan - Volume 1. August 2017. Environment Canterbury, Christchurch.

Golder Associates, 2012. Monitoring programme for South-West Christchurch stormwater management plan. Prepared by Golder Associates for Christchurch City Council, Christchurch. TRIM # = 13/929433.

Golder Associates, 2013. Monitoring programme for the Styx River/Pūrākaunui area stormwater management plan. Prepared by Golder Associates for Christchurch City Council, Christchurch. TRIM # = 13/1266793.

Harding, J.S., 2005. Impacts of metals and mining on stream communities, in *Metal Contaminants in New Zealand*, T.A. Moore, A. Black, J.A. Centeno, J.S. Harding & D.A. Trumm (Editors), p. 343-357. Resolutionz press, Christchurch.

Harrison, X.A., 2014. Using observation-level random effects to model overdispersion in count data in ecology and evolution. Peer J, 2. DOI:10.7717/peerj.616

Harrison, X.A., 2015. A comparison of observation-level random effect and Beta-Binomial models for modelling overdispersion in Binomial data in ecology & evolution. Peer J, 3. DOI:10.7717/peerj.1114

Hayward, S., Meredith, A., & Stevenson, M., 2009. Review of proposed NRRP water quality objectives and standards for rivers and lakes in the Canterbury region. Environment Canterbury Report R09/16, March 2009.

Hickey, C.W., 2013. Updating nitrate toxicity effects on freshwater aquatic species. Report prepared for Ministry of Business, Innovation and Employment, Report No. HAM2013-009. NIWA, Hamilton.

Holland, K., Stanley, C. L. & Buckthought, L., 2016. State of the environment monitoring: river water quality annual report 2015. Auckland Council technical report, TR2016/034.

Margetts, B.I., 2014a. Interim Global Stormwater Consent: Surface water quality monitoring report for the period May 2013 – April 2014. Christchurch City Council, Christchurch. TRIM # = 14/810303.

<http://ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/City-Wide-Surface-Water-Quality-2014-excluding-South-West-and-Styx-SMP-PDF-1.44-MB.pdf>

Margetts, B., 2014b. Interim Global Stormwater Consent: wet weather monitoring report for the period May 2013 – April 2014. Christchurch City Council, Christchurch. TRIM # = 14/810311.

<http://ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/Interim-Global-Stormwater-Consent-Wet-Weather-Surface-Water-Quality-2014-PDF-1.45-MB.pdf>

Margetts, B. & Marshall, W., 2015. Surface water quality monitoring report for Christchurch City waterways: January - December 2014. Christchurch City Council, Christchurch. TRIM # = 15/458527.

<http://ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/City-Wide-Surface-Water-Quality-2015-PDF-5.17-MB.PDF>

Margetts, B. & Marshall, W., 2016. Surface water quality monitoring report for Christchurch City waterways: January - December 2015. Christchurch City Council, Christchurch. TRIM # = 16/935196.

<https://www.ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/City-Wide-Surface-Water-Quality-2016-PDF-6.03-MB.PDF>

Marshall, W. & Burrell, G., 2017. Surface water quality monitoring report for Christchurch City waterways: January - December 2016. Christchurch City Council, Christchurch. TRIM # = 18/55340.

<https://www.ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/City-Wide-Annual-Surface-Water-Quality-Monitoring-Report-2016.pdf>

Ministry for the Environment, 1992. Water Quality Guidelines No. 1: Guidelines for the control of undesirable biological growths in water. Ministry for the Environment, Wellington.

Ministry for the Environment, 2003. Microbiological water quality guidelines for marine and freshwater recreational areas. Ministry for the Environment, Wellington.

Moriarty, E. & Gilpin, B., 2015. Faecal Sources in the Avon River/Ōtakaro, Heathcote River/Ōpāwaho and the Estuary of the Heathcote & Avon Rivers/Ihutai. Report No. CSC15022. Report prepared for Environment Canterbury, Community and Public Health. Institute of Environmental Science and Research Limited, Christchurch.

<https://www.ccc.govt.nz/assets/Uploads/Faecal-source-tracking-of-Avon-and-Heathcote-Rivers-and-Avon-Heathcote-Estuary-2015-PDF-2.39-MB.pdf>

NIWA, 2014. Trend and equivalence analysis. Software Version 5.0. NIWA. http://www.jowettconsulting.co.nz/home/time-1/Timetrends_setup.zip?attredirects=0.

Noakes, K. & Blakely, T., 2017. Ōtūkaikino River Catchment Aquatic Ecology: Long-term monitoring of the Ōtūkaikino River catchment. Report prepared by Boffa Miskell Limited for the Christchurch City Council, Christchurch. TRIM # = 18/164998.

Robinson, K. & Stevenson, M. 2016. Development of a Water Quality Index for Environment Canterbury Water Quality Reporting. Environment Canterbury internal report.

Ryan, P.A., 1991. Environmental effects of sediment on New Zealand streams: a review. *New Zealand Journal of Marine and Freshwater Research* 25: 207-221.

Stevenson, M., Wilks, T. & Hayward, S. 2009. An overview of the state and trends in water quality of Canterbury's rivers and streams. Environment Canterbury Report R10/117, November 2010.

Wahl, C.M., Neils, A. & Hooper, D., 2013. Impacts of land use at the catchment scale constrain the habitat benefits of stream riparian buffers. *Freshwater Biology* 58(11): 2310-2324.

Walsh C.J., Roy A.H., Feminella J.W., Cottingham P.D., Groffman P.M. & Morgan R.P., 2005. The urban stream syndrome: current knowledge and the search for a cure. *Journal of the North American Benthological Society* **24**: 706-723.

Whyte (now Margetts), B., 2013a. Christchurch Rivers water quality monitoring: annual results summary May 2012 – April 2013. Christchurch City Council, Christchurch. TRIM # = 13/776628.

<http://ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/City-Wide-Surface-Water-Quality-2013-PDF-3.40-MB.pdf>

Whyte (now Margetts), B., 2013b. Interim Global Stormwater Consent wet weather monitoring: annual results summary May 2012 – April 2013. Christchurch City Council, Christchurch. TRIM # = 13/726841.

<http://ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/Interim-Global-Stormwater-Consent-Wet-Weather-Surface-Water-Quality-2013-PDF-0.42-MB.pdf>

Whyte (now Margetts), B.I., 2014a. Styx Stormwater Management Plan: Surface water quality monitoring January – December 2013. Christchurch City Council, Christchurch. TRIM # = 14/394400.

<http://ccc.govt.nz/assets/Documents/Environment/Water/Monitoring-Reports/Styx-River-SMP-Surface-Water-Quality-2014-PDF-0.91-MB.pdf>

Whyte (now Margetts), B.I., 2014b. South-West Stormwater Management Plan: Surface water quality monitoring January – December 2013. Christchurch City Council, Christchurch. TRIM # = 14/396577.

<https://cccgovt.nz.cwp.govt.nz/assets/Uploads/City-Wide-Surface-Water-Quality-2014-South-West-SMP-PDF-2.084-MB.pdf>

Appendix A: Laboratory Methods and Limits of Detection

Table i. Laboratory methods used over time to calculate parameter concentrations. N/A = Not Applicable.

Parameter	Limit of Detection (date)	Analysis Method (date)
Total ammonia (ammoniacal nitrogen)	<0.005 mg/L (4 September 2014 - current day)	APHA 4500-NH3 G (Continuous Flow Autoanalyser) (1 August 2014 - current day)
	<0.01 mg/L (sampling instigation - 3 September 2014)	4500-NH3 F (Discrete Analyser) (Sampling instigation - 31 July 2014)
Total arsenic	<0.0001 mg/L (October 2015 - current day)	ICPMS APHA 3125B (October 2015 – current day)
	<0.002 mg/L (Sampling instigation - September 2015)	GFAA APHA 3120B (Sampling instigation - October 2015)
Biochemical Oxygen Demand (BOD ₅)	<1.0 mg/L (sampling instigation- current day)	APHA 5210 B (Sampling instigation - current day)
Conductivity		APHA 2510 B (Sampling instigation - current day)
Total and dissolved copper	Total Copper: Varies between <0.001mg/L- <0.005 mg/L (sampling instigation - current day)	APHA 3125 B modified, (Varian7900 ICP- MS) using nylon 0.45um filters. Digestion APHA 3030 E (5 May 2016 - current day)
	Dissolved Copper: <0.002 mg/L (December 2008 - current day)	Graphite furnace (GFAA - graphite furnace atomic absorption, Varian) using acid washed GF/F filters (Sampling instigation - 04 May 2016)
	<0.0001 mg/L (23/11/2016 - current day, Ōtūkaikino catchment only)	
	<0.004 mg/L (2007 - November 2008)	
Dissolved Oxygen (DO)	N/A	APHA 4500-O G (Sampling instigation - current day)
Enterococci	<10 and >24,000 MPN/100mL (sampling instigation - current day)	Enterolert APHA 9230 D (Sampling instigation - current day)
<i>Escherichia coli</i>	Varies depending on required dilution (Sampling instigation - current day)	Colilert APHA 4500 9223 B (Sampling instigation - current day)
Total water hardness	N/A	APHA 2340 B calculation from calcium and magnesium measured by APHA 3125 B modified (Varian7900 ICP- MS,) using nylon 0.45um filters (Sampling instigation - current day)

Parameter	Limit of Detection (date)	Analysis Method (date)
Total and dissolved lead	Total Lead: Varies between <0.004 mg/L- <0.0015 mg/L (sampling instigation - current day) Dissolved lead: <0.0015 mg/L (December 2008 - current day) <0.006 mg/L (2007 - November 2008)	APHA 3125 B modified (Varian7900 ICP- MS), using nylon 0.45um filters. Digestion APHA 3030 E (Sampling instigation - current day)
Nitrate nitrogen	<0.003 mg/L (9 September 2014 - current day) <0.05 mg/L (Sampling instigation - 8 September 2014)	APHA 4500-NO3 F (Continuous flow autoanalyser) (1 August 2014 - current day) APHA 4500-NO3 H (Hydrazine Reduction Discrete Analyser) (Sampling instigation - 31 July 2014)
Nitrite nitrogen	<0.001 mg/L (9 September 2014 - current day) <0.005 mg/L (Sampling instigation - 8 September 2014)	APHA 4500-NO3 F 22nd Ed. 2012 (cadmium reduction and continuous flow analyser) (1 August 2014 - current day) APHA 4500-NO2 B (Discrete Analyser) (Sampling instigation - 31 July 2014)
Nitrate Nitrite Nitrogen (NNN)	<0.01 mg/L (27 July 2011 - current day) <0.05 mg/L (Sampling instigation - 26 July 2011)	APHA 4500-NO3 E (Continuous Flow Autoanalyser) (3 April 2009 - current day) Nitrate + Nitrite (Sampling instigation - 2 April 2009)
Dissolved Inorganic Nitrogen (DIN)	<0.02 mg/L	Total ammonia + Nitrite-Nitrate-Nitrogen (Sampling instigation - current day)
Total nitrogen	<0.01 mg/L (10 July 2014 - current day) <0.05 mg/L (4 March 2009 - 9 July 2014) <1.0 mg/L (Sampling instigation - 3 March 2009)	APHA 4500-N C 22nd Ed. 2012 (persulphate digestion and continuous flow analyser) (1 August 2014 - current day)
pH	N/A	APHA 4500-N C (Discrete Analyser) (Sampling instigation - 31 July 2014)
Dissolved Reactive	<0.003 mg/L	APHA 4500-P F (Continuous Flow Autoanalyser) (1 August 2014 - current day)

Parameter	Limit of Detection (date)	Analysis Method (date)
Phosphorus (DRP)	(22 December 2010 - current day)	4500-P E (Discrete Analyser) (Sampling instigation - 31 July 2014)
	<0.02 mg/L (1 December 2010 - 21 December 2010)	
	<0.003 mg/L (17 November 2009 - 30 November 2010)	
	<0.01 mg/L (Sampling instigation - 16 November 2009)	
Total phosphorus	<0.003 mg/L (10 July 2014 - current day)	APHA 4500-P J 22nd Ed. 2012 (persulphate digestion and continuous flow analyser) (1 August 2014 - current day)
	<0.02 mg/L (17 November 2009 - 09 July 2014)	APHA 4500-P J (Discrete Analyser) (Sampling instigation - 31 July 2014)
	<0.06 mg/L (Sampling instigation - 16 November 2009)	
Total Suspended Solids (TSS)	<3 mg/L (September 2010 - current day)	APHA 2540 D (Sampling instigation - current day)
	<5 mg/L (Sampling instigation - August 2010)	
TPH ¹¹	<0.3 mg/L	Extraction DCM (GC-FID) (Sampling instigation - current day)
Turbidity	<0.1 NTU (Sampling instigation - current day)	APHA 2130 B 22nd Ed 2012 (turbidity meter Hach 2100AN) (Sampling instigation - current day)
Water temperature	N/A	YSI Pro ODO meter (Sampling instigation - current day)
Total and dissolved zinc	Total and dissolved zinc:	APHA 3125 B modified, (Varian7900 ICP- MS) using nylon 0.45um filters. Digestion APHA 3030 E.
	<0.001 mg/L (March 2009 - current day)	(5 May 2016 - current day)
	<0.006 mg/L (Sampling instigation - February 2009)	ICPOES (Inductively coupled optical emission spectrometer, Perkin Elmer) using acid washed GF/F filters (Sampling instigation - 04 May 2016)

¹¹ Analysed by Watercare Laboratory (IANZ accredited)

Appendix B: Metal Hardness Modified Trigger Values

9.1 Ōtākaro/ Avon, Ōpāwaho/ Heathcote, Pūharakekenui/ Styx, Ōtūkaikino and Huritini/ Halswell River Catchments

1. Introduction

The Australian and New Zealand guidelines for fresh and marine water quality (ANZECC, 2000) provides a set of default guideline trigger values for metals, with which to compare measured contaminant concentrations. These trigger values represent concentrations below which there is considered to be a low risk of adverse biological effects (ANZECC, 2000). The guidelines also provide a process for modifying the given trigger values for local environmental conditions. If measured concentrations of toxicants are below default trigger values, then there is a low risk of adverse effects. However, if measured concentrations exceed these guidelines, then it is possible to consider site specific factors that may modify the trigger values, to gain a better understanding of whether a real risk exists. If measured concentrations also exceed modified trigger values, then the next step would be to directly assess biological effects.

Christchurch City Council has measured concentrations of metals (total cadmium, total copper, total lead, total zinc) in water samples from 33 river monitoring sites across the city since 2008. Measured concentrations vary widely across the monitoring sites, and there are several sites where values often exceed guideline trigger values. In fresh waters, the hardness, pH and alkalinity of the water can alter the toxicity of metals and hence the risk of adverse biological effects (ANZECC, 2000). The default guideline trigger values for metals assume that water is soft (with a hardness value of between 0 and 59 mg/L as CaCO₃), but as water hardness increases, the toxicity of some metals decreases and therefore the trigger value may increase, without increasing the risk of adverse biological effects.

To make an informed assessment of the real risks associated with exceeding the default trigger values, additional monitoring for water hardness has been included at sites within each catchment for the purpose of calculating appropriate hardness modified trigger values (HMTV) for Christchurch rivers using the water hardness dependent algorithms provided in the ANZECC (2000) guidelines.

2. Sites and sampling regime

Water samples are collected monthly at sites across the five main catchments within Christchurch City (Avon, Heathcote, Styx, Halswell, Otukaikino). These samples are analysed at the Christchurch City Council laboratory for a range of physical and chemical characteristics, including temperature, nutrients, microbiological indicators and metals. Since December 2010, samples from the eight sites listed in Table 1 have also been analysed for water hardness measured in mg/L as CaCO₃. Routine water quality monitoring was disrupted on several occasions during 2011, by the significant earthquakes experienced in the city. Despite this, each of the sites had between 9 and 12 water hardness measures recorded by March 2012 and the results were relatively consistent over time for each site.

Table 1. Sampling sites for water hardness investigation (December 2010 to March 2012)

Site Description	Easting	Northing	Number of water hardness samples
Otukaikino at Groynes Inlet	2477878	5750484	11
Styx River at Gardiners Road	2476786	5748821	12
Styx River at Marshland Road bridge	2482356	5749417	12
Avon River at Mona Vale	2478279	5742653	9
Avon River at Gayhurst Road	2483549	5742827	9
Heathcote River at Templetons Road	2475913	5738516	12
Heathcote at Opawa Road/Clarendon Terrace	2483072	5739226	12
Halswell River at Akaroa Highway	2474427	5733346	9

3. Results

3.1. Water Hardness by catchment

Sites on the Styx and Otukaikino rivers had median hardness values within the 'soft' water category, the Avon and Halswell river sites were within the 'moderate' hardness category and the Heathcote sites had 'moderate' to 'hard' water (Figure 1). For the Heathcote River, the Templetons Road site had a number of low hardness outlier values, but median water hardness was higher at the upstream site (Templetons Road) than the downstream site (Opawa Road).

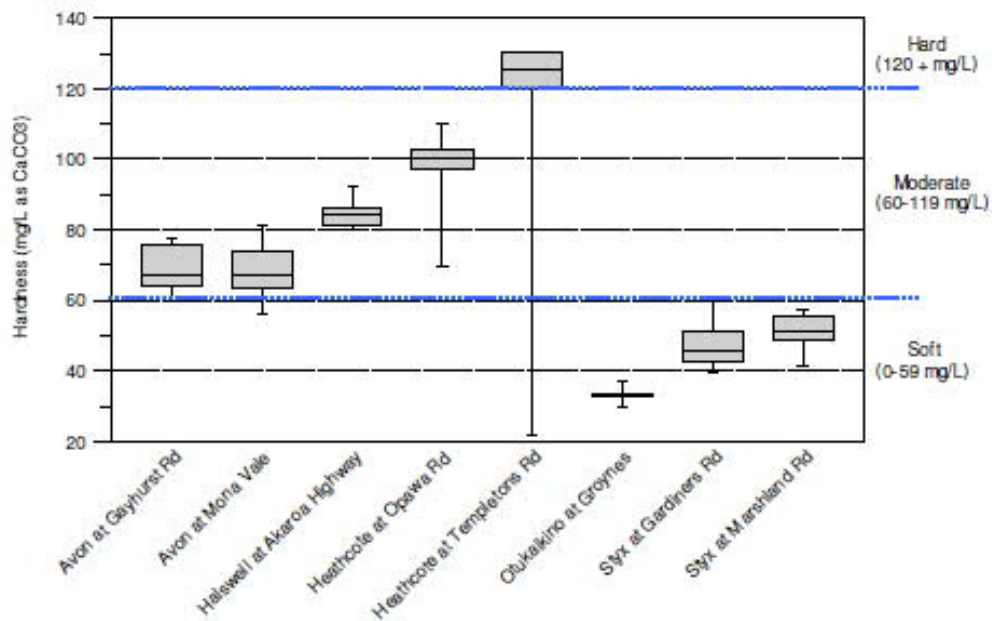


Figure 1 Box plots displaying median (and upper, lower quartiles, max and min) water hardness values for monitoring sites on the Avon, Heathcote, Halswell, Styx and Otukaikino rivers between December 2010 and March 2012.

3.2. Hardness Modified Trigger Values (HMTV)

Hardness modified trigger values (HMTV) are greater than default trigger values in each of the rivers in Christchurch (Table 1). This is because the default values assume that water is in the 'soft' category and this provides trigger values to conservatively protect aquatic ecosystems values in the absence of further information to refine these values.

Table 2 Default and HMTV for metals in the Avon, Heathcote, Halswell, Styx and Otukaikino rivers, based on 99, 95 and 90% levels of species protection as described by ANZECC (2000).

Level of species protection		Default trigger values (µg/L) (ANZECC, 2000)			Hardness modified trigger values (µg/L)		
		99%	95%	90%	99%	95%	90%
Avon	Cadmium	0.06	0.20	0.40	0.12	0.41	0.82
	Copper	1.00	1.40	1.80	1.98	2.77	3.56
	Lead	1.00	3.40	5.60	2.77	9.43	15.54
	Zinc	2.40	8.00	15.00	4.75	15.84	29.70
Heathcote	Cadmium	0.06	0.20	0.40	0.19	0.64	1.27
	Copper	1.00	1.40	1.80	3.02	4.22	5.43
	Lead	1.00	3.40	5.60	5.21	17.71	29.16
	Zinc	2.40	8.00	15.00	7.24	24.14	45.26
Halswell	Cadmium	0.06	0.20	0.40	0.15	0.50	1.00
	Copper	1.00	1.40	1.80	2.40	3.36	4.32
	Lead	1.00	3.40	5.60	3.70	12.57	20.71
	Zinc	2.40	8.00	15.00	5.76	19.19	35.99
Styx	Cadmium	0.06	0.20	0.40	0.09	0.31	0.62
	Copper	1.00	1.40	1.80	1.52	2.12	2.73
	Lead	1.00	3.40	5.60	1.86	6.34	10.44
	Zinc	2.40	8.00	15.00	3.64	12.14	22.76
Otukaikino	Cadmium	0.06	0.20	0.40	0.07	0.22	0.44
	Copper	1.00	1.40	1.80	1.08	1.52	1.95
	Lead	1.00	3.40	5.60	1.13	3.84	6.32
	Zinc	2.40	8.00	15.00	2.60	8.68	16.27

4. References

ANZECC (Australian and New Zealand Environment and Conservation Council), 2000. Australian and New Zealand guidelines for fresh and marine water quality.

Zoë Dewson
WATERWAYS PLANNER ECOLOGIST, CHRISTCHURCH CITY COUNCIL
Ph. 941-8464
zoe.dewson@ccc.govt.nz

9.2 *Linwood Canal*

Linwood Canal Hardness Modified Trigger Values for Metals

1. Introduction

The Australian and New Zealand guidelines for fresh and marine water quality (ANZECC, 2000) provides a set of default guideline trigger values for dissolved metals. If measured concentrations of toxicants are below default trigger values, then there is considered to be a low risk of adverse effects. The guidelines also provide a process for modifying the given trigger values for local environmental conditions, namely hardness, which can affect the toxicity of metals and therefore increase the risk of adverse biological effects (ANZECC, 2000). The default guideline trigger values for metals assume that water is soft (with a hardness value of between 0 and 59 mg/L as CaCO₃). However, as water hardness increases, the toxicity of some metals decreases and therefore the trigger value may increase without increasing the risk of adverse biological effects. Hardness Modified Trigger Values (HMTV) for dissolved metals for the Avon, Heathcote, Halswell, Styx and Otukaikino Rivers have previously been calculated by the Christchurch City Council (Dewson, 2012) and these are the guidelines used in reporting. It is considered that hardness values are unlikely to change over the years, so these values should only need to be re-assessed approximately every five years. However, no values have previously been calculated for the Linwood Canal (City Outfall Drain), which is in its own catchment. This memorandum therefore outlines hardness modified values for this waterway, which have also been calculated based on the water hardness algorithms provided in the ANZECC guidelines (ANZECC, 2000).

2. Methods

Linwood Canal at Humphreys Drive (2485954E, 5739637N) has been sampled monthly for a variety of water quality parameters since January 2007. However, water hardness has only been monitored (measured in mg/L as CaCO₃) since September 2014. One full year of data has now be collected to enable the calculation of Hardness Modified Trigger Values for metals. Dissolved copper, lead and zinc trigger values were calculated, given these are the primary metals of concern, which are commonly compared against guidelines levels.

Boxplots of the water hardness data were created in IBM® SPSS Statistics 20, to show the median and interquartile range. Statistical outliers were not removed, as values were assumed to be 'real', providing useful information on variations in the concentrations recorded. The dark line in the boxplots represents the median, and the bottom and top lines of the box represent the 25th and 75th percentiles (the interquartile range), respectively. The T-bars that extend from the box approximate the location of 95% of the data. Circles represent statistical outliers and stars represent extreme outliers.

To calculate the HMTV for metals for Linwood Canal, 90% species protection was chosen. This waterway is not classified under the proposed Land and Water Regional Plan (Environment Canterbury, 2012), but is considered to best fit the 'spring-fed – plains – urban' classification, which relates to 90% species protection under this plan. The algorithms in the ANZECC (2000) guidelines were then used to calculate the final trigger values.

3. Results

Median water hardness at Linwood Canal fell within the 'extremely hard' category (greater than 400 mg/L) of the ANZECC (2000) guidelines (Table 1 & Figure 1). Therefore, HMTV for copper, lead and zinc were calculated to be 0.0175 mg/L, 0.168 mg/L and 0.146 mg/L, respectively (Table 2).

Table 1. Summary of the monitoring data for water hardness (mg/L) in Linwood Canal from September 2014 - August 2015.

Sample Size	Median	Mean	Standard Error of the Mean	Minimum	Maximum
12	435	738	206	160	2500

Table 3. Calculations of Hardness Modified Trigger Values for copper, lead and zinc for Linwood Canal, using 90% species protection and the ANZECC (2000) algorithms. HMTV = Hardness Modified Trigger Value; TV = Trigger Value; H = Hardness.

Copper	Lead	Zinc
$HMTV = TV(H/30)^{0.25}$	$HMTV = TV(H/30)^{1.27}$	$HMTV = TV(H/30)^{0.25}$
$= 1.8 \times (435/30)^{0.25}$	$= 5.6 \times (435/30)^{1.27}$	$= 15 \times (435/30)^{0.25}$
$= 17.5 \mu\text{g/L}$	$= 167 \mu\text{g/L}$	$= 146 \mu\text{g/L}$
$= 0.0175 \text{ mg/L}$	$= 0.167 \text{ mg/L}$	$= 0.146 \text{ mg/L}$

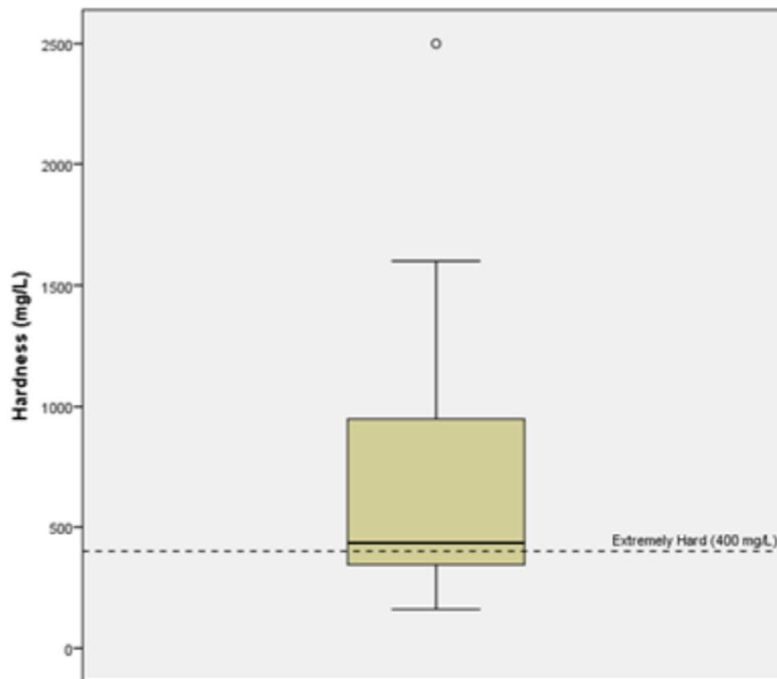


Figure 1. Box plot of water hardness for Linwood Canal for the monitoring period September 2014 - August 2015

▲ **3. References**

ANZECC (Australian and New Zealand Environment and Conservation Council, ANZECC, and Agriculture and Resource Management Council of Australia and New Zealand, ARMCANZ), 2000. Australian and New Zealand guidelines for fresh and marine water quality. Volume 1: The guidelines. ANZECC & ARMCANZ, Artarmon, New South Wales.

Dewson, Z. (2012). Hardness modified trigger values for river water quality. Christchurch City Council, Christchurch. TRIM No. 13/333219.

Environment Canterbury (2012). Proposed Canterbury Land and Water Regional Plan - Volume 1. Environment Canterbury, Christchurch.

Dr Belinda Margetts

Christchurch City Council
Waterways Ecologist
Assets and Network Unit

Winsome Marshall

Environmental Consultant
Aquatic Ecology Limited

11th September 2015

Appendix C: Sampling Instigation at Each Site

Table i. Summary of the date of first monthly sampling at the 44 water quality monitoring sites. Dissolved metals were monitored from 2011, unless otherwise specified.

Catchment	Site Description	Monitoring Instigated
Ōtākaro/ Avon	Wairarapa Stream	January 2007 ¹²
	Waimairi Stream	January 2007 ¹²
	Avon River at Mona Vale	January 2007 ¹²
	Avon River at Carlton Mill Corner	October 2008 ¹³
	Riccarton Main Drain	October 2008
	Addington Brook	October 2008
	Avon River at Manchester Street	July 2008 ¹⁴
	Dudley Creek	October 2008
	Avon River at Dallington Terrace/Gayhurst Road ⁸	January 2007
	Horseshoe Lake Discharge	October 2008
	Avon River at Avondale Road	October 2008 ¹³
	Avon River at Pages/Seaview Bridge	January 2007
Avon River at Bridge Street	January 2007 ¹²	
Ōpāwaho/ Heathcote	Heathcote River at Templetons Road	January 2007 ¹⁵
	Haytons Stream at Retention Basin	April 2007 ¹⁶
	Curletts Road Stream Upstream of Heathcote River	October 2008
	Curletts Road Stream at Motorway	October 2008 ¹³
	Heathcote River at Rose Street	June 2008 ¹⁷
	Cashmere Stream at Sutherlands Road	December 2010
	Cashmere Stream at Worsleys Road	January 2007
	Heathcote River at Ferniehurst Street	July 2008 ^{16,18}
	Heathcote River at Bowenvale Avenue	January 2007
	Heathcote River at Opawa Road/Clarendon Terrace	January 2007
	Heathcote River at Mackenzie Avenue	October 2008 ¹³
	Heathcote River at Catherine Street	October 2008 ¹³
Heathcote River at Tunnel Road	January 2007	
Heathcote River at Ferrymead Bridge	January 2007	
Pūharakekenui/ Styx	Smacks Creek at Gardiners Road	January 2007 ¹⁵
	Styx River at Gardiners Road	January 2007 ¹⁵
	Styx River at Main North Road	January 2007 ¹⁵
	Kā Pūtahi at Blakes Road	January 2007 ¹⁵
	Kā Pūtahi at Belfast Road	January 2007 ¹⁵
	Styx River at Marshland Road Bridge	January 2007 ¹⁵
	Styx River at Richards Bridge	October 2008
Styx River at Harbour Road Bridge	January 2008	
Huritini/ Halswell	Halswell Retention Basin Inlet	April 2007 ^{16,13}
	Halswell Retention Basin Outlet	April 2007 ^{13,16,19}
	Knights Stream at Sabys Road	May 2012
	Nottingham Stream at Candys Road	October 2008
	Halswell River at Akaroa Highway	October 2008
Ōtūkaikino	Ōtūkaikino Creek at Omaka Scout Camp	October 2014
	Ōtūkaikino River at Groynes Inlet	October 2008
	Wilson's Drain at Main North Road	November 2013
Linwood	Linwood Canal	January 2007 ¹²

¹² Dissolved oxygen monitored from June 2007

¹³ Dissolved metals monitored from September 2014

¹⁴ Dissolved oxygen monitored from October 2008

¹⁵ Dissolved oxygen monitored from March 2007

¹⁶ Dissolved oxygen, total ammonia, conductivity, *E. coli*, nitrogen parameters, pH, DRP and water temperature monitored from October 2008

¹⁷ Dissolved oxygen, BOD₅, conductivity, nitrate, pH, TSS and water temperature monitored from August 2008. Total ammonia, *E. coli*, nitrogen parameters (excluding nitrate) and DRP monitored from October 2008

¹⁸ BOD₅ and TSS monitored from October 2008

¹⁹ BOD₅ monitored from April 2008

Appendix D: Monthly Monitoring Graphs

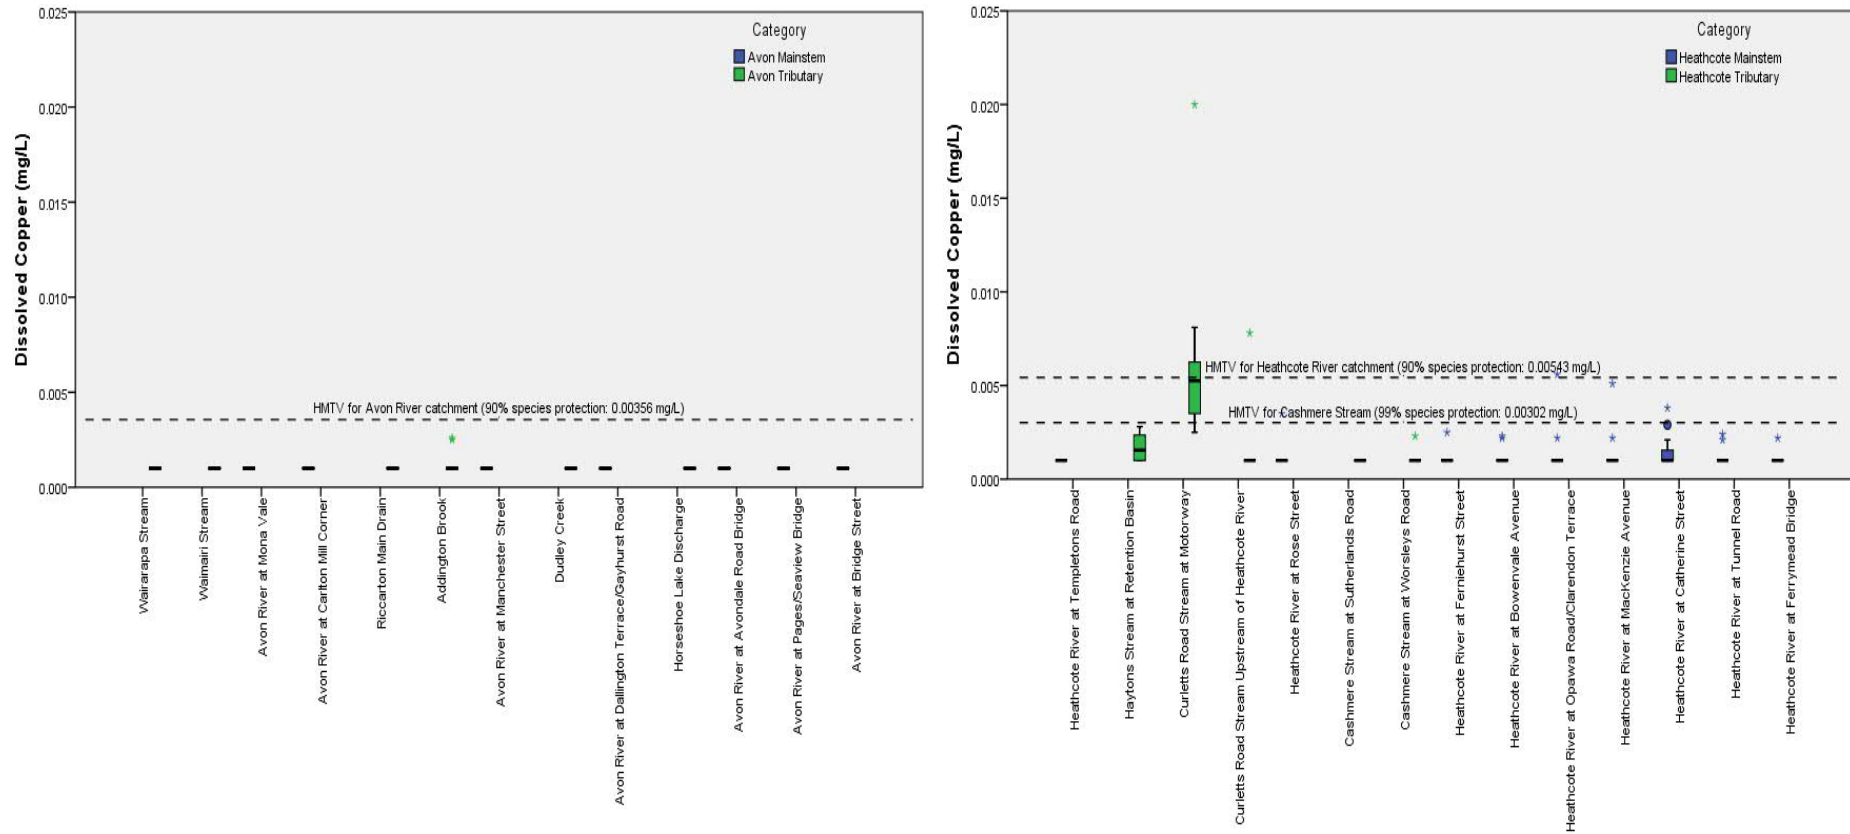


Figure i (a). Dissolved copper levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger values (Environment Canterbury, 2017), which have been modified to account for water hardness (Hardness Modified Trigger Value = HMTV), as per the ANZECC (2000) guidelines methodology. The Laboratory Limit of Detection for these two catchments was 0.002 mg/L – analysed as half this value (0.001 mg/L) to allow statistics to be undertaken.

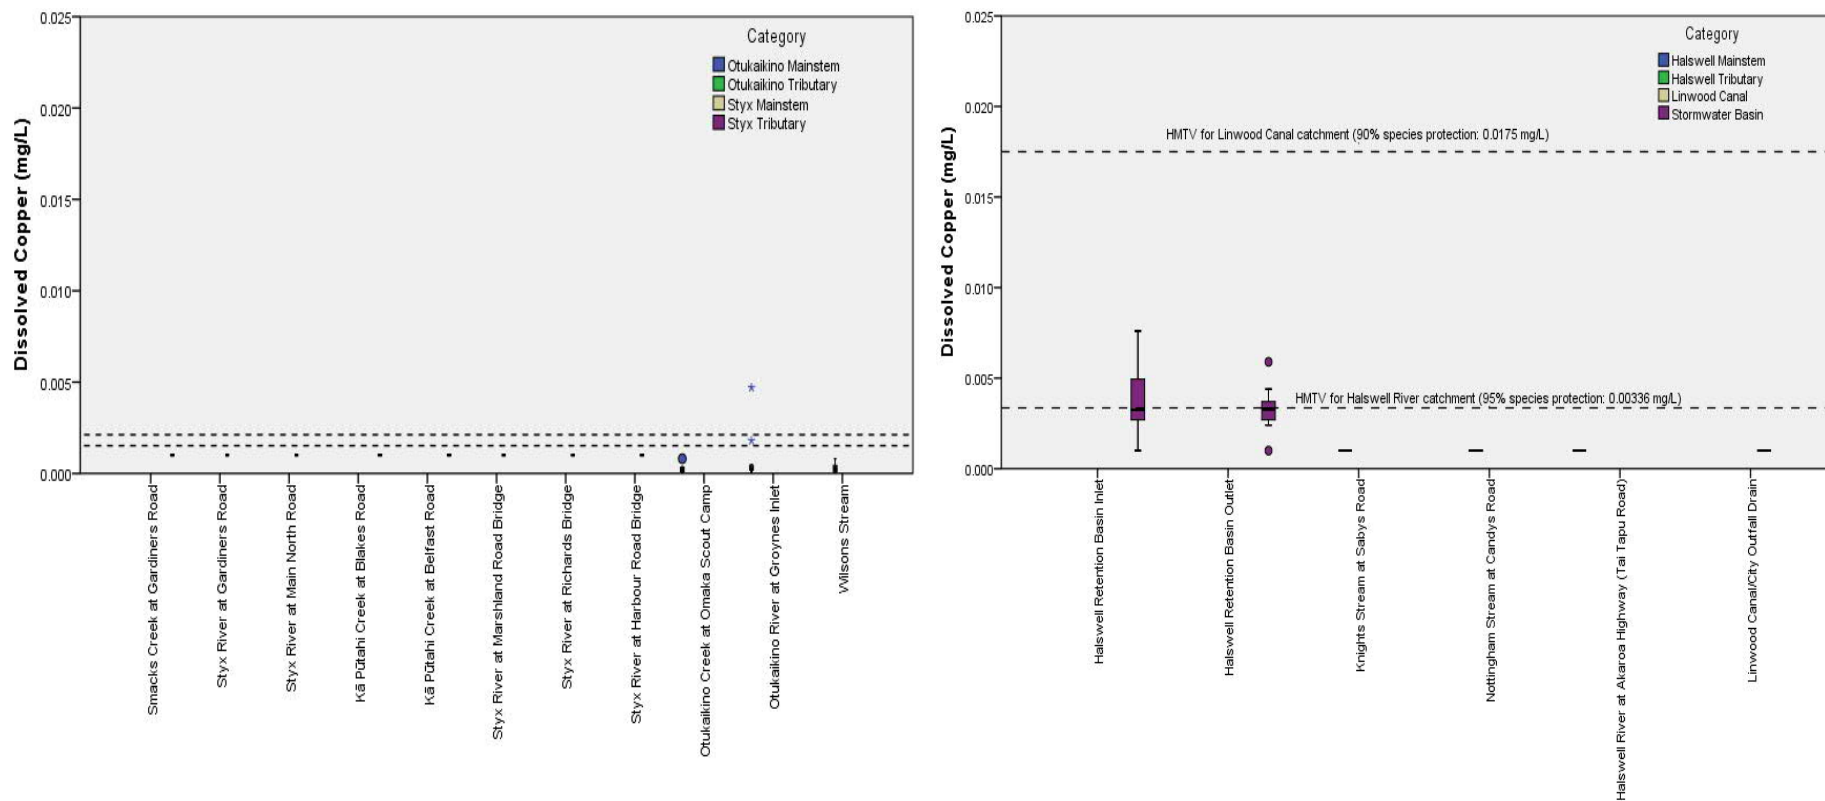


Figure i (b). Dissolved copper levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger values (Environment Canterbury, 2017), which have been modified to account for water hardness (Hardness Modified Trigger Value = HMTV), as per the ANZECC (2000) guidelines methodology. On the left graph, the upper dashed line represents the 95% species protection for Pūharakekenui/ Styx River catchment (0.00212 mg/L), while the lower represents the 95% species protection for Ōtūkaikino River catchment (0.00152 mg/L). The Laboratory Limit of Detection was 0.002 mg/L (analysed as half this value (0.001 mg/L) to allow statistics to be undertaken), with the exception of the Ōtūkaikino catchment, where the LOD was 0.0001 mg/L.

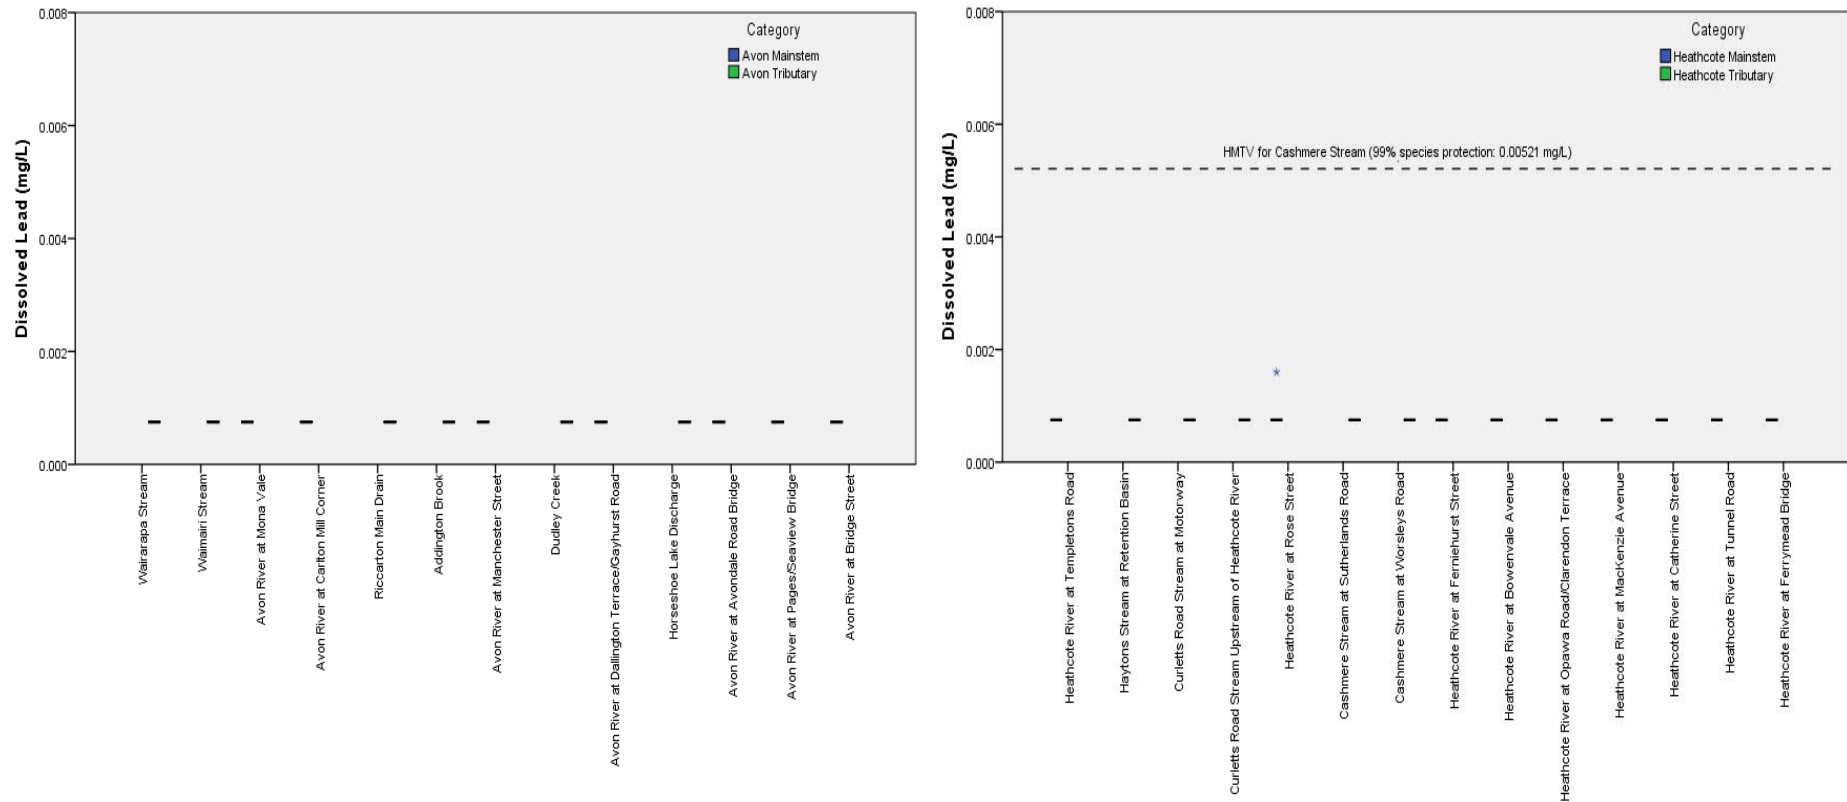


Figure ii (a). Dissolved lead levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed line represents the Land and Water Regional Plan trigger value (Environment Canterbury, 2017), which has been modified to account for water hardness (Hardness Modified Trigger Value = HMTV), as per the ANZECC (2000) guidelines methodology. The 90% protection HMTV for the Ōtākaro/ Avon River (0.01554 mg/L) and the Ōpāwaho/ Heathcote River (0.02916 mg/L) are not shown as they are off the scale. The Laboratory Limit of Detection was 0.0015 mg/L – analysed as half this value (0.00075 mg/L) to allow statistics to be undertaken.

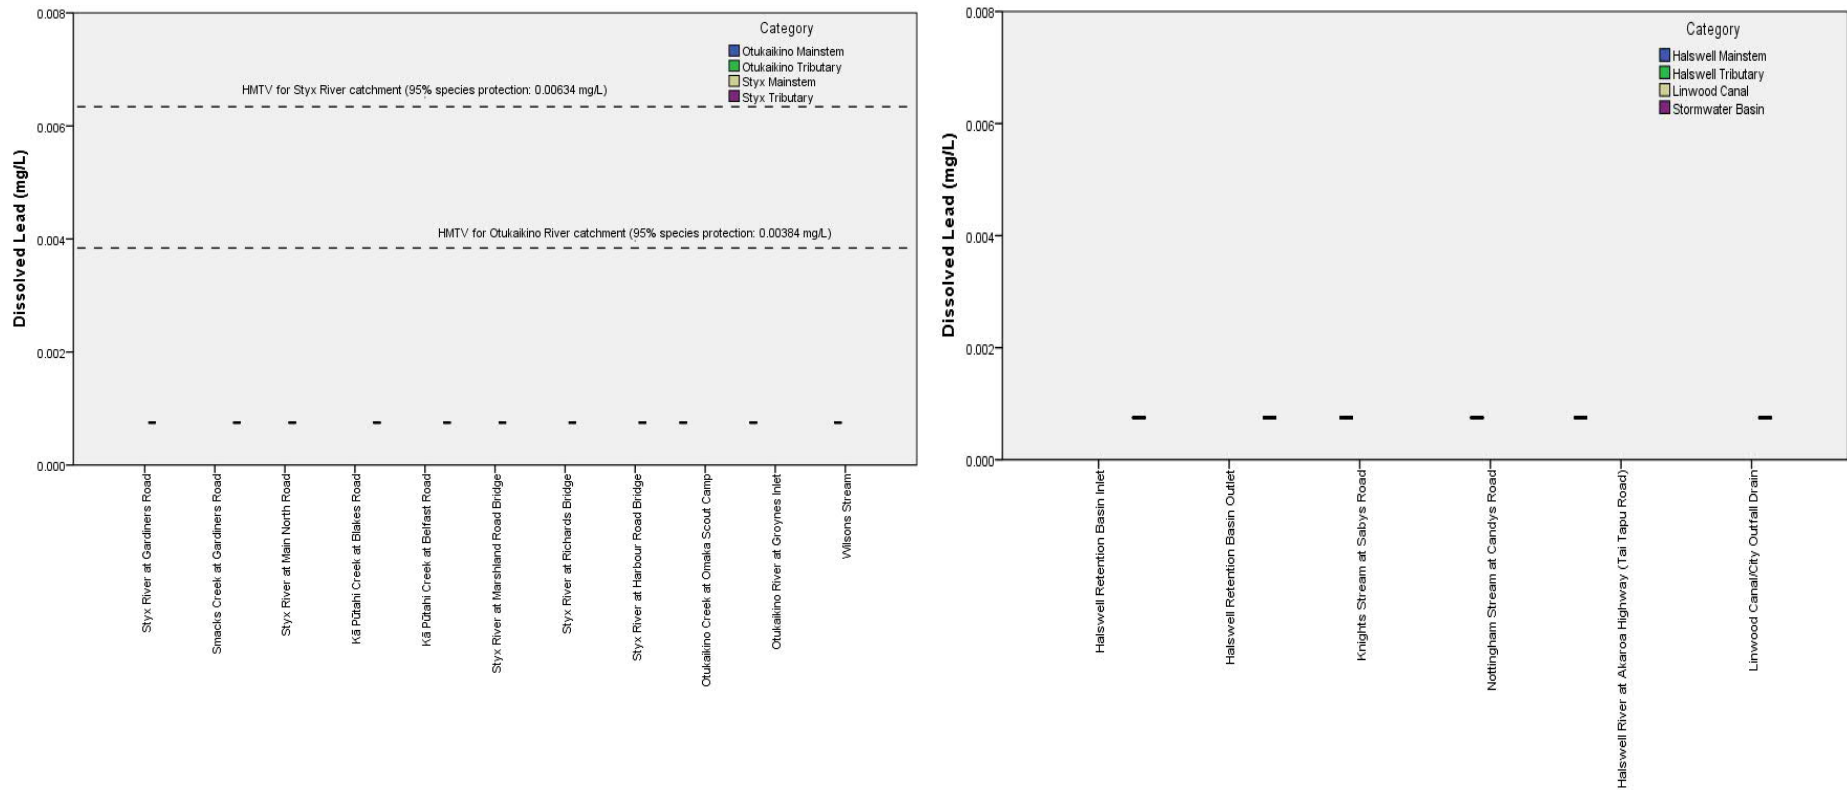


Figure ii (b). Dissolved lead levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger value (Environment Canterbury, 2017), which has been modified to account for water hardness (Hardness Modified Trigger Value = HMTV), as per the ANZECC (2000) guidelines methodology. The 95% protection HMTV for Huritini/ Halswell River (0.01257 mg/L) and 90% protection HMTV for Linwood Canal (0.167 mg/L) are not visible because they are off the scale. The Laboratory Limit of Detection was 0.0015 mg/L – analysed as half this value (0.00075 mg/L) to allow statistics to be undertaken.

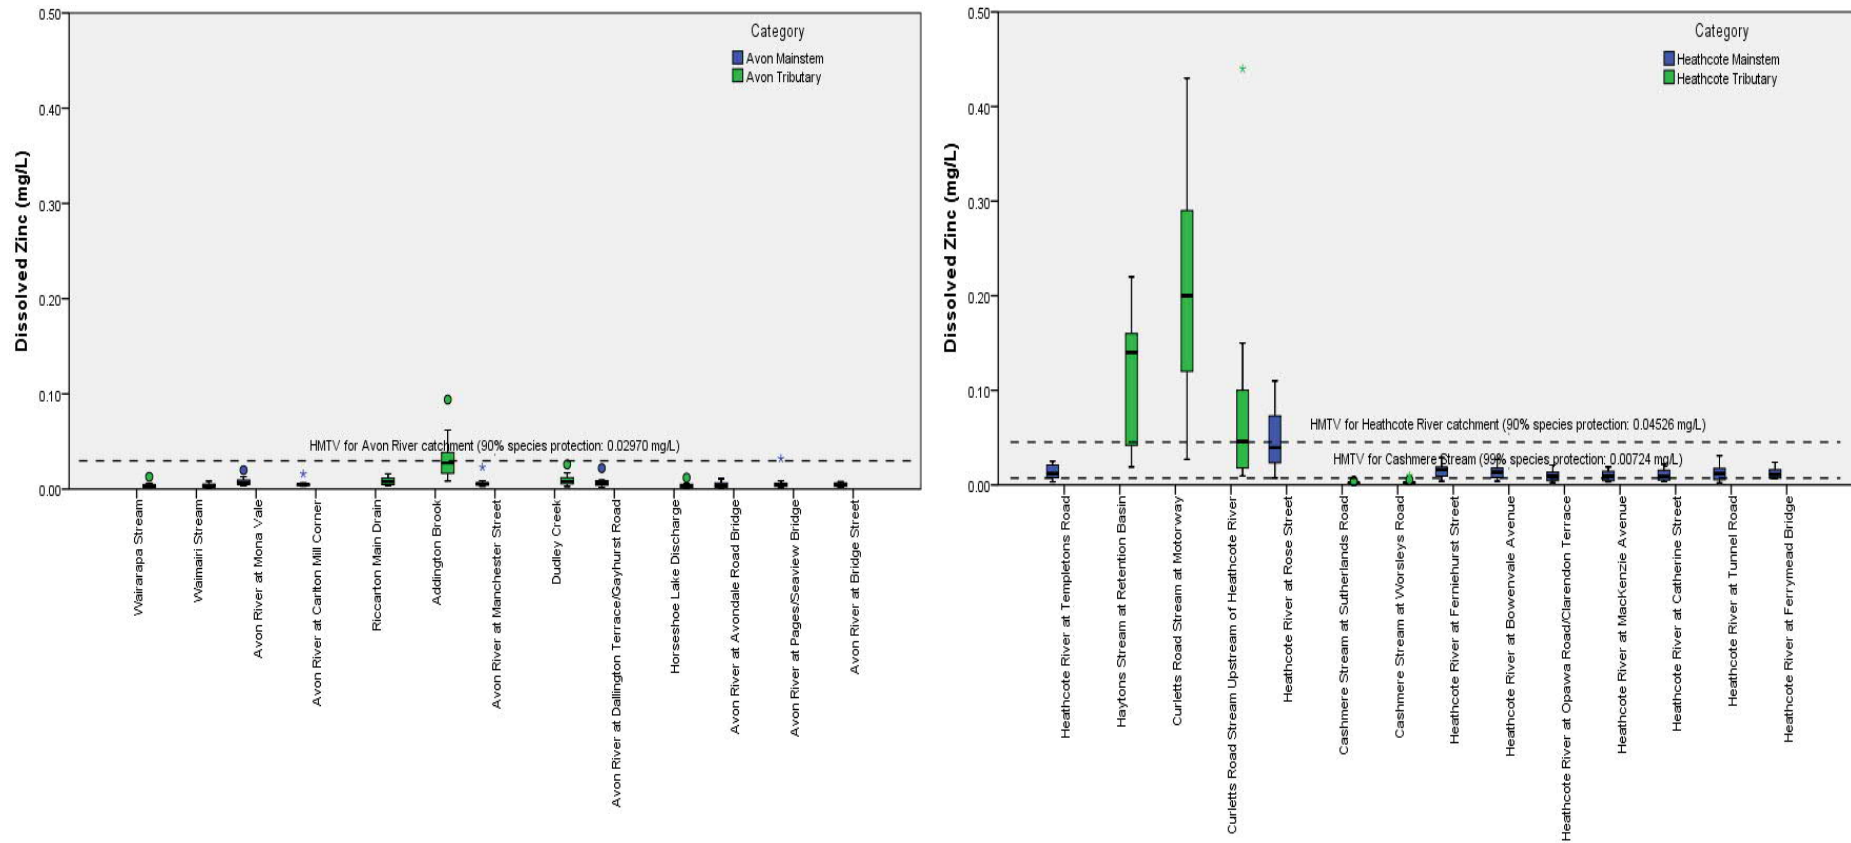


Figure iii (a). Dissolved zinc levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger values (Environment Canterbury, 2017), which have been modified to account for water hardness (Hardness Modified Trigger Value = HMTV), as per the ANZECC (2000) guidelines methodology. The Laboratory Limit of Detection was 0.001 mg/L – analysed as half this value (0.0005 mg/L) to allow statistics to be undertaken.

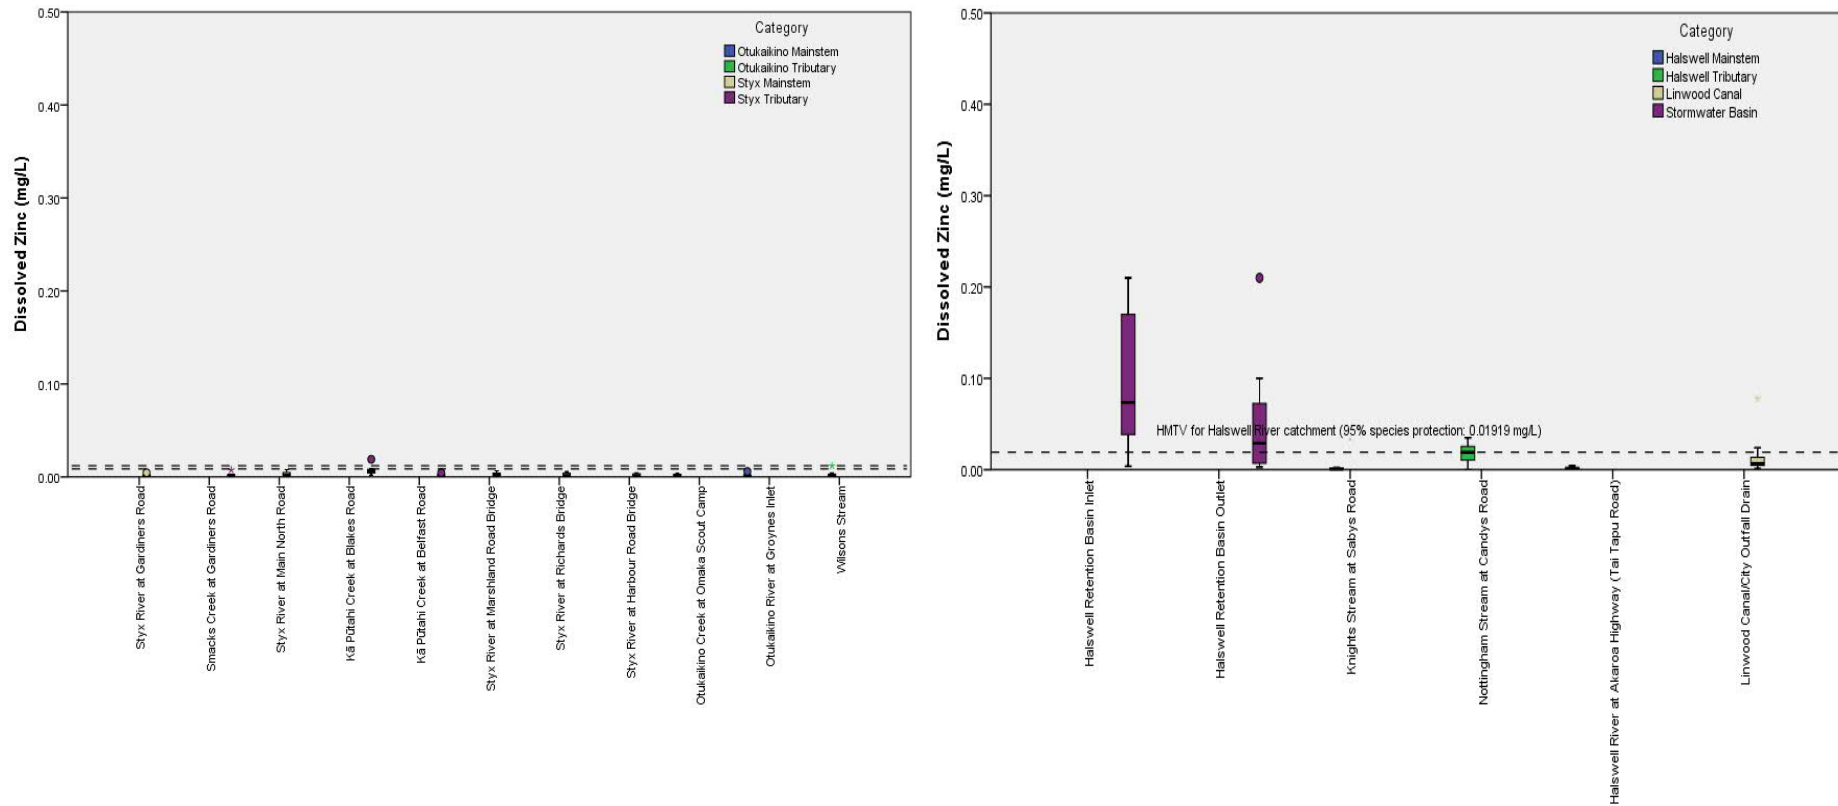


Figure iii (b). Dissolved zinc levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger values (Environment Canterbury, 2017), which have been modified to account for water hardness (Hardness Modified Trigger Value = HMTV), as per the ANZECC (2000) guidelines methodology. On the left graph, the upper dashed line represents the 95% species protection for Pūharakekenui/ Styx River catchment (0.01214 mg/L), while the lower represents the 95% species protection for Ōtūkaikino River catchment (0.00868 mg/L). The 90% protection HMTV for Linwood Canal (0.146 mg/L) is not visible because it is off the scale. The Laboratory Limit of Detection was 0.001 mg/L – analysed as half this value (0.0005 mg/L) to allow statistics to be undertaken.

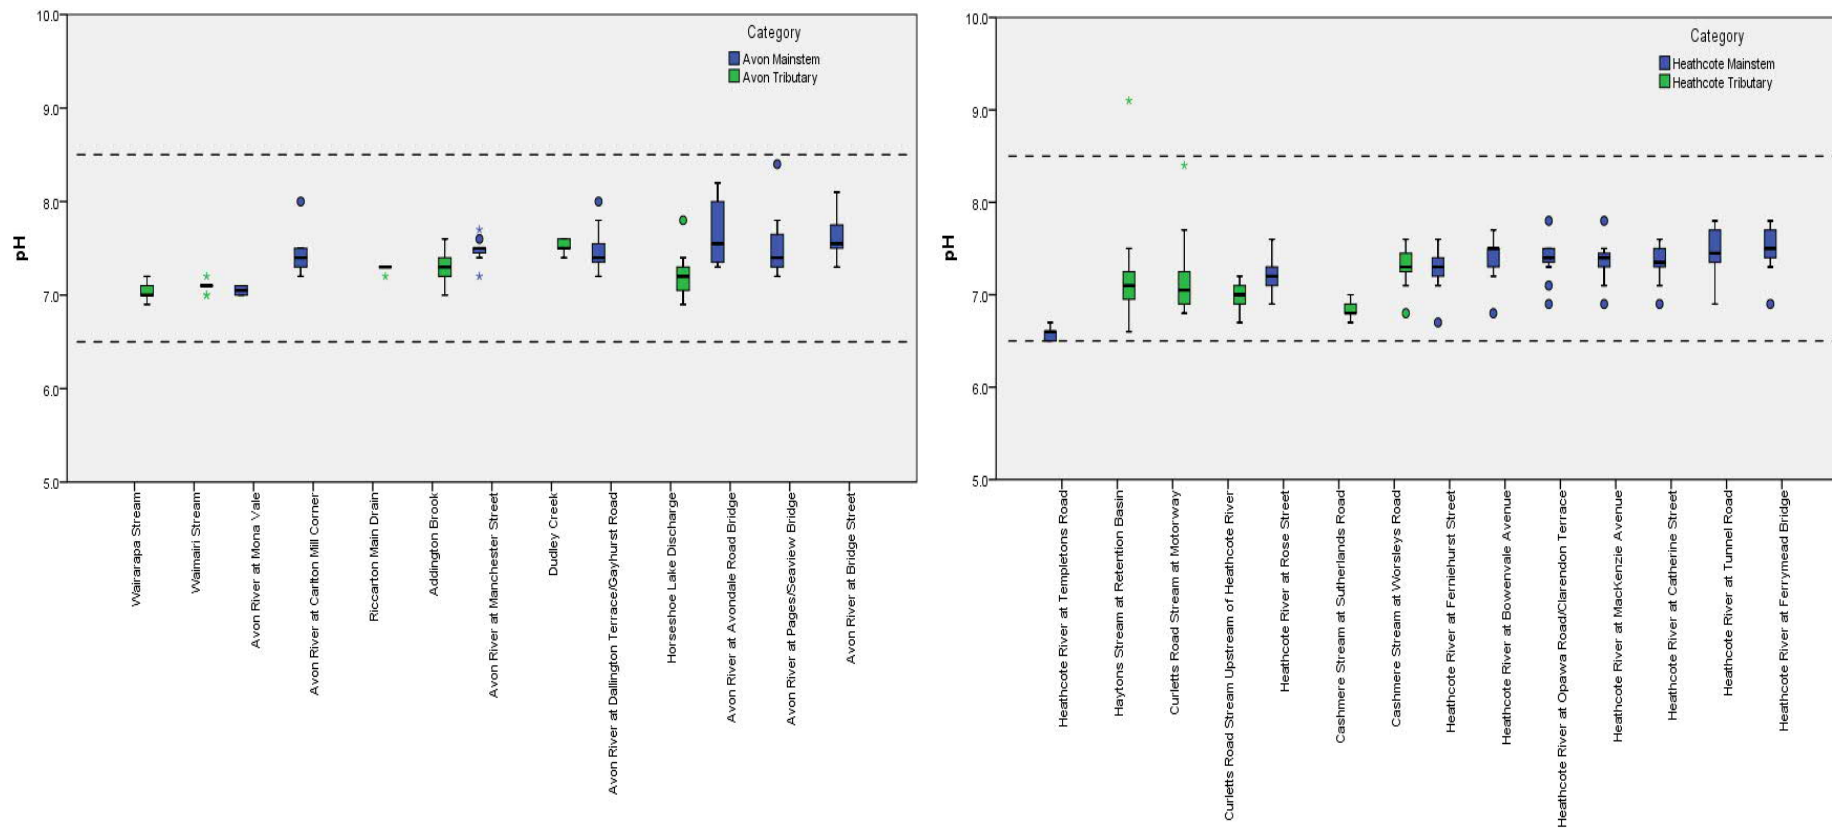


Figure iv (a). pH levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan lower (6.5) and upper (8.5) limits (Environment Canterbury, 2017).

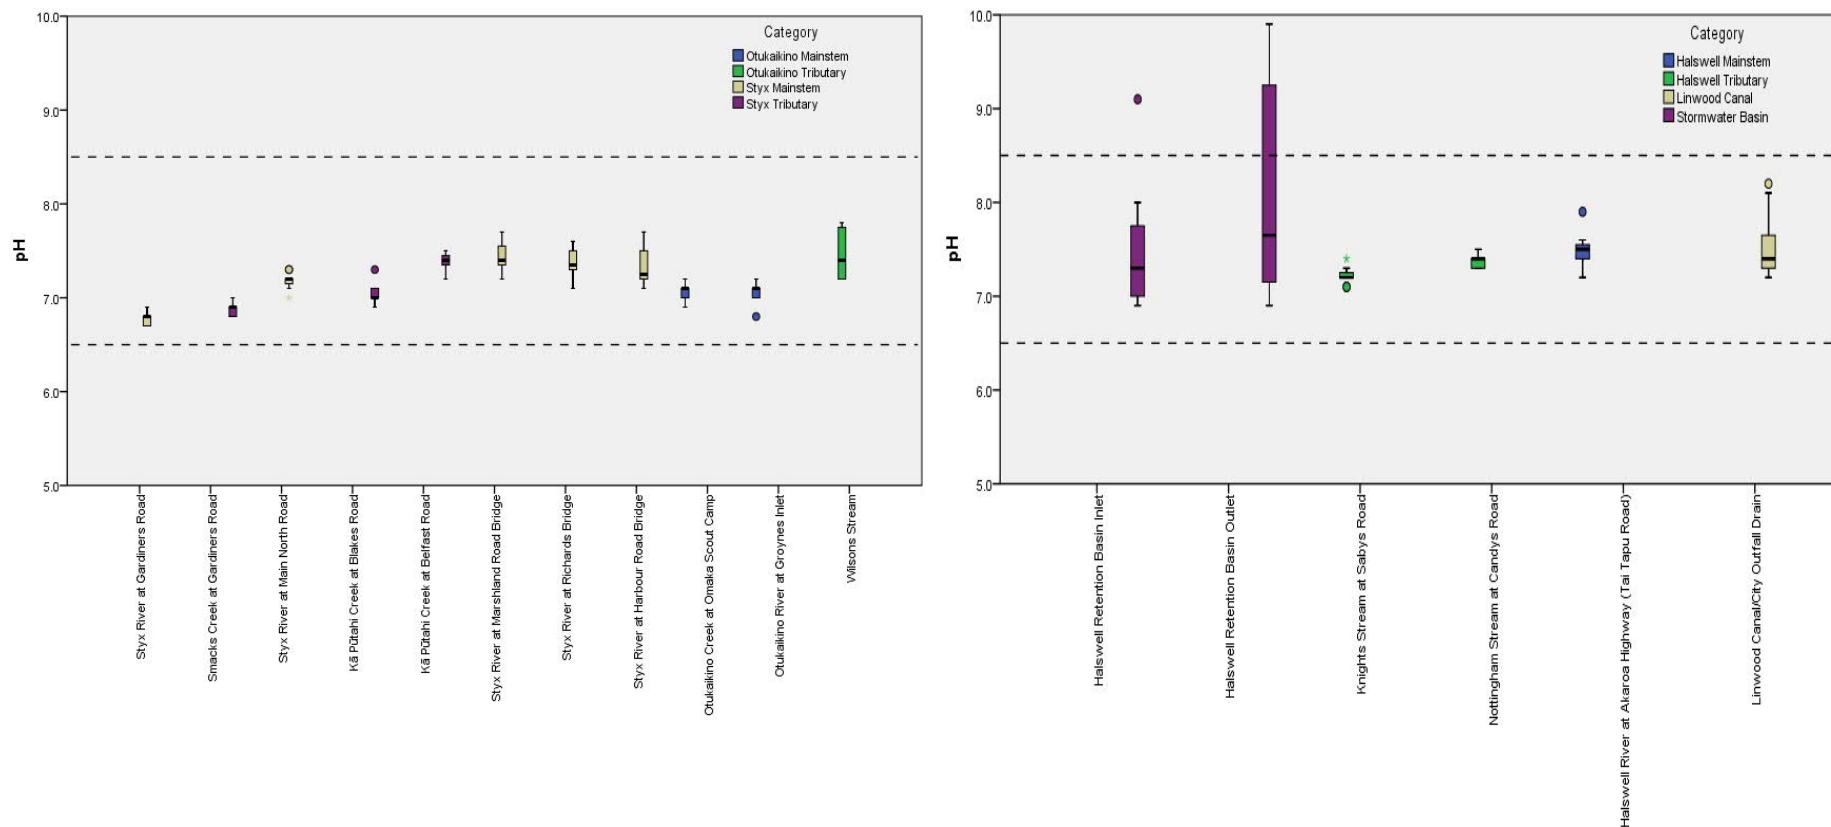


Figure iv (b). pH levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan lower (6.5) and upper (8.5) limits (Environment Canterbury, 2017).

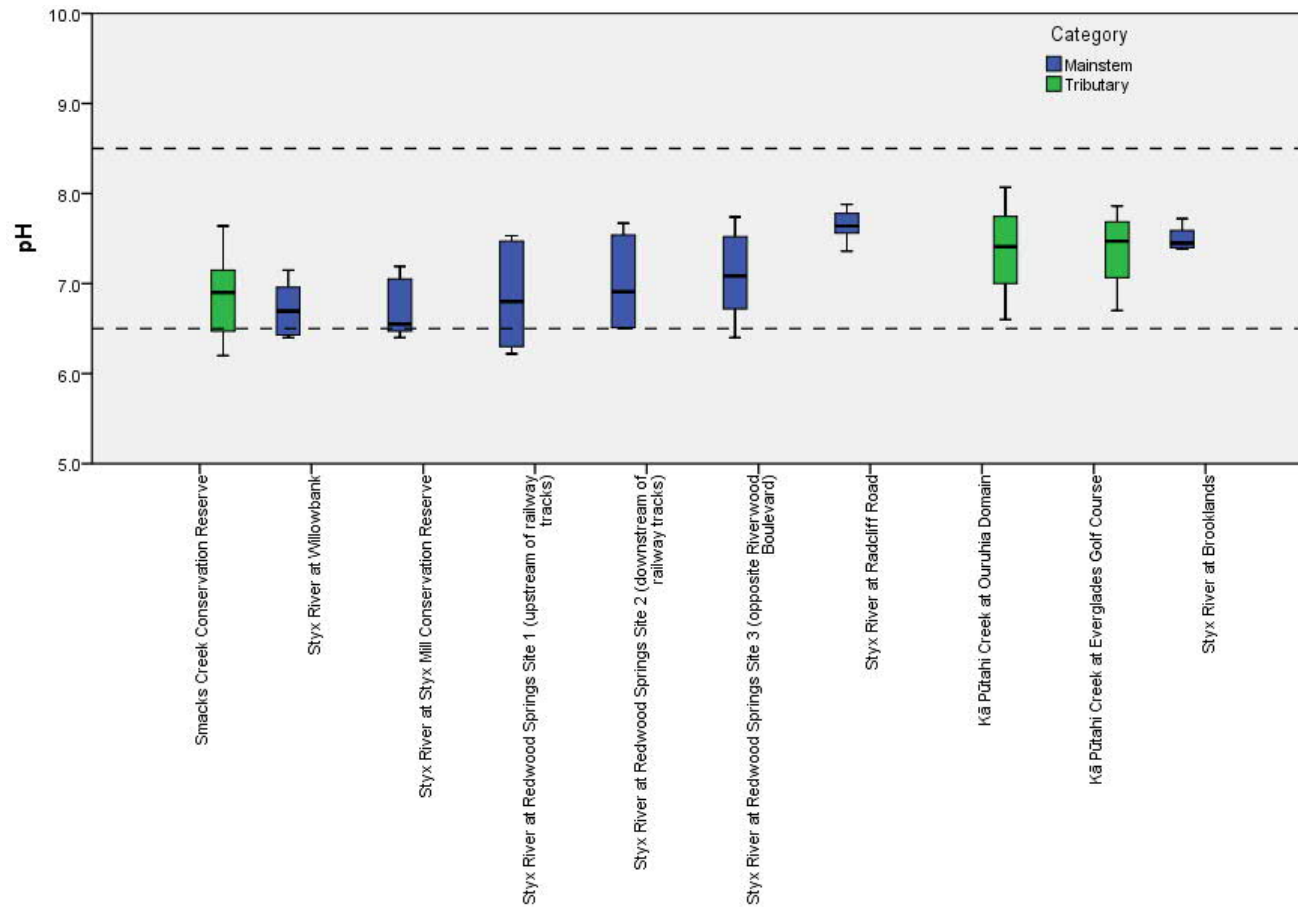


Figure iv (c). pH levels in water samples taken from the Pūharakekenui/ Styx River catchment by the Styx Living Laboratory Trust volunteers for the monitoring period January to December 2017 (n = 4 – 6 samples per site). Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan lower (6.5) and upper (8.5) limits (Environment Canterbury, 2017).

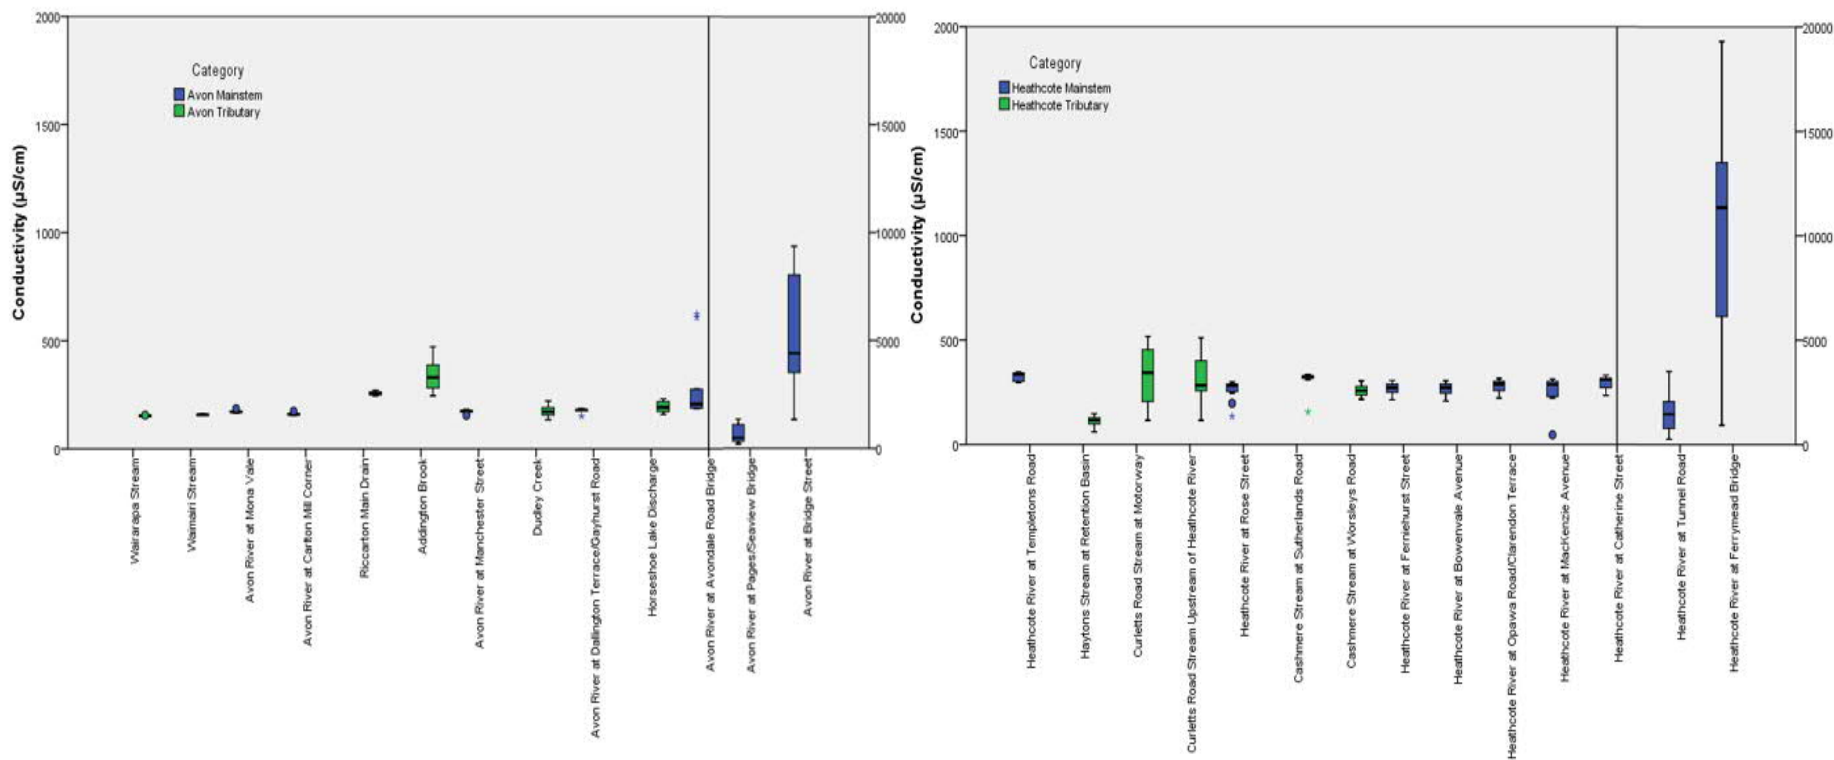


Figure v (a). Conductivity levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). All conductivity graphs have the same scale presented on the primary (left) axis. Given the large differences in values within the catchments, some sites are presented with an alternate scale on the secondary (right) axis. Scale change is marked with a solid vertical line.

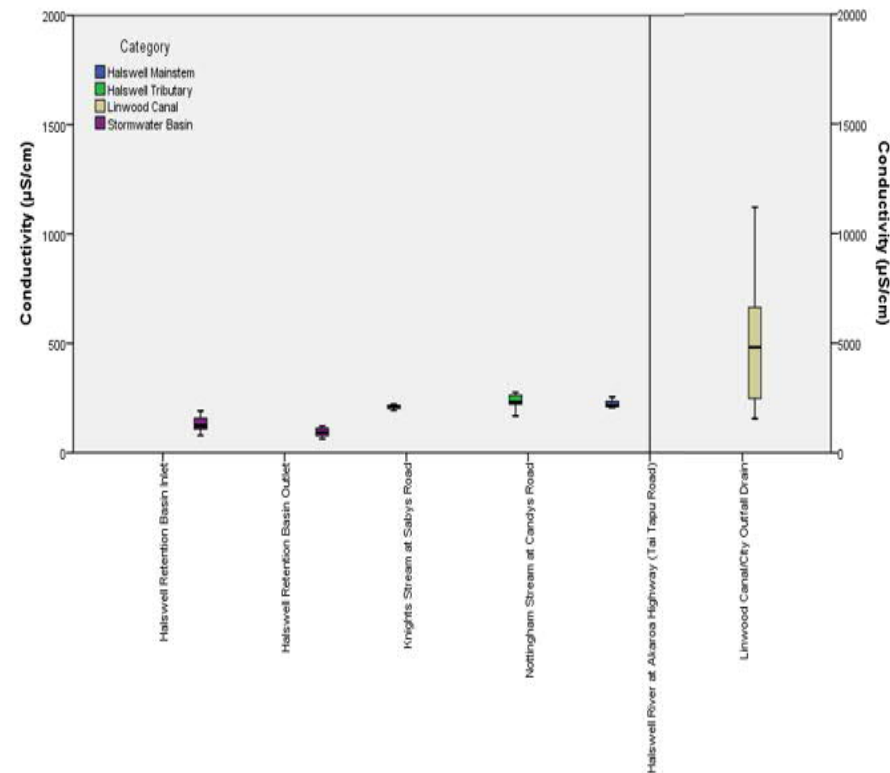
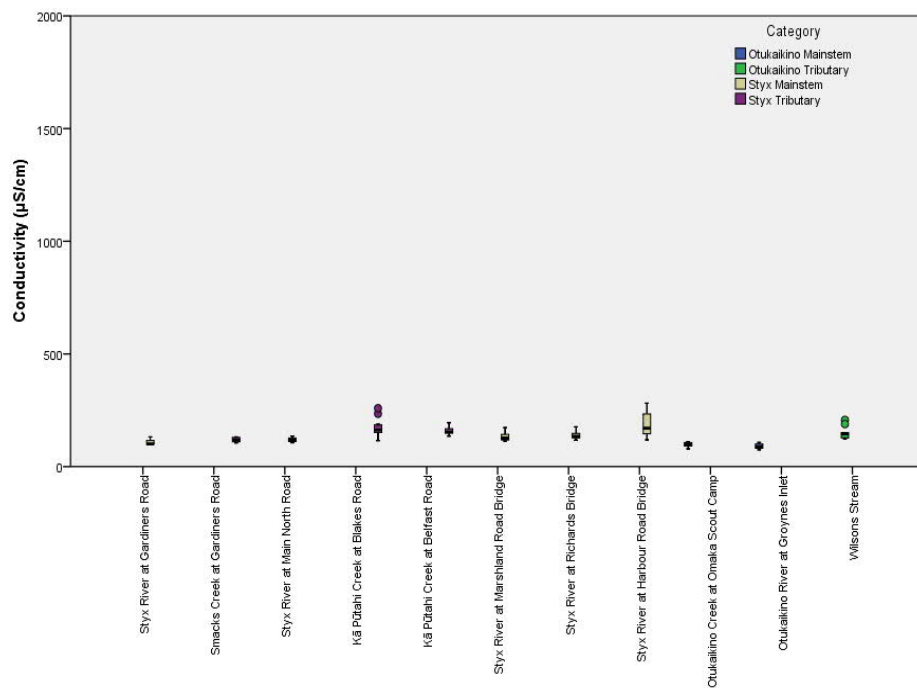


Figure v (b). Conductivity levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). All conductivity graphs have the same scale presented on the primary (left) axis. Given the large differences in values within the catchments, some sites are presented with an alternate scale on the secondary (right) axis. Scale change is marked with a solid vertical line.

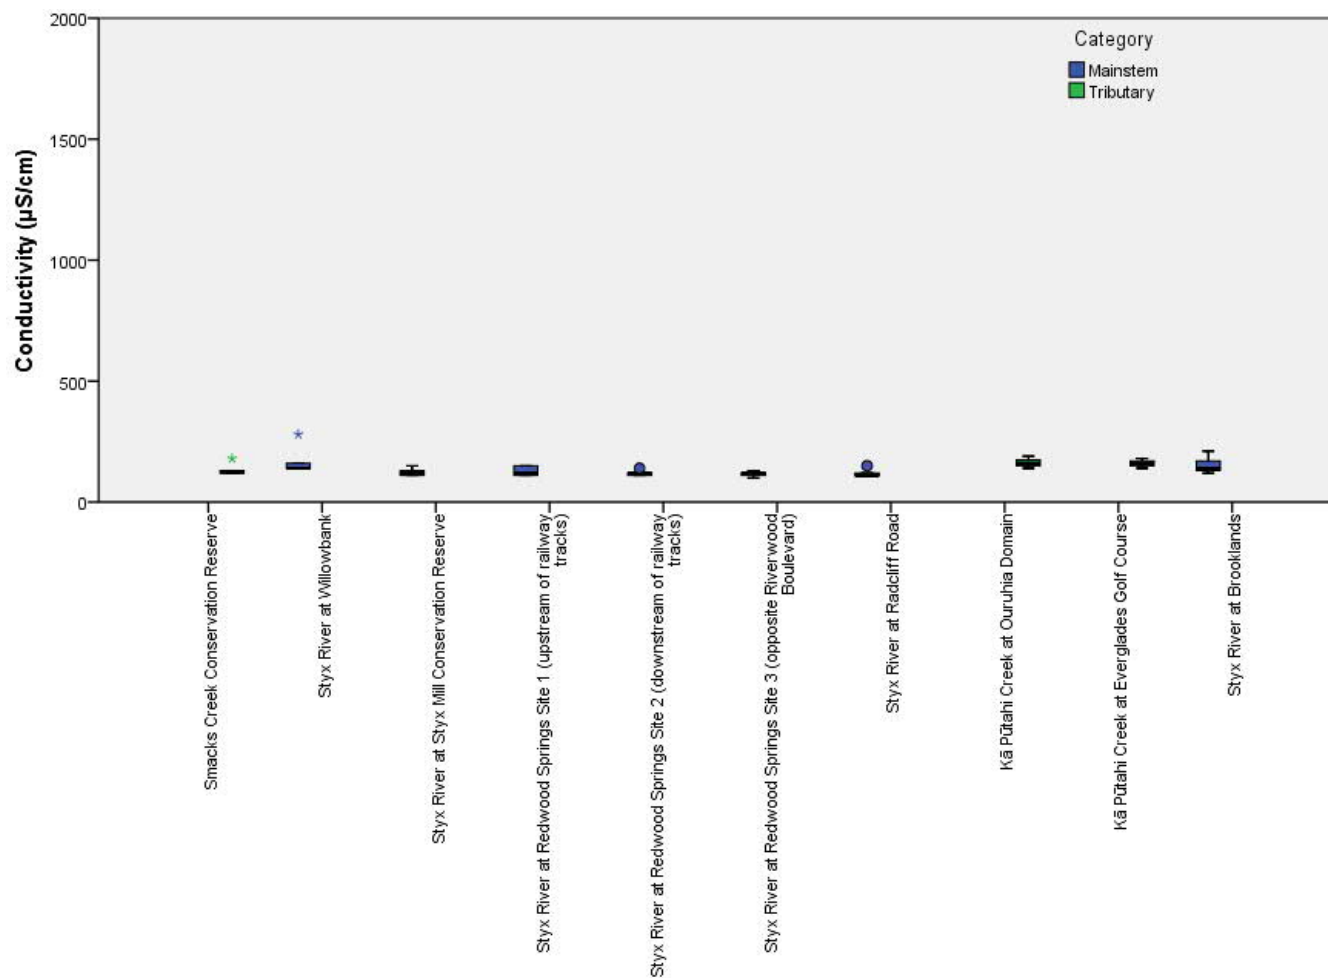


Figure v (c). Conductivity levels in water samples taken from the Pūharakekenui/ Styx River catchment by the Styx Living Laboratory Trust volunteers for the monitoring period January to December 2017 (n = 4 – 6 samples per site). Sites are ordered from upstream to downstream (left to right).

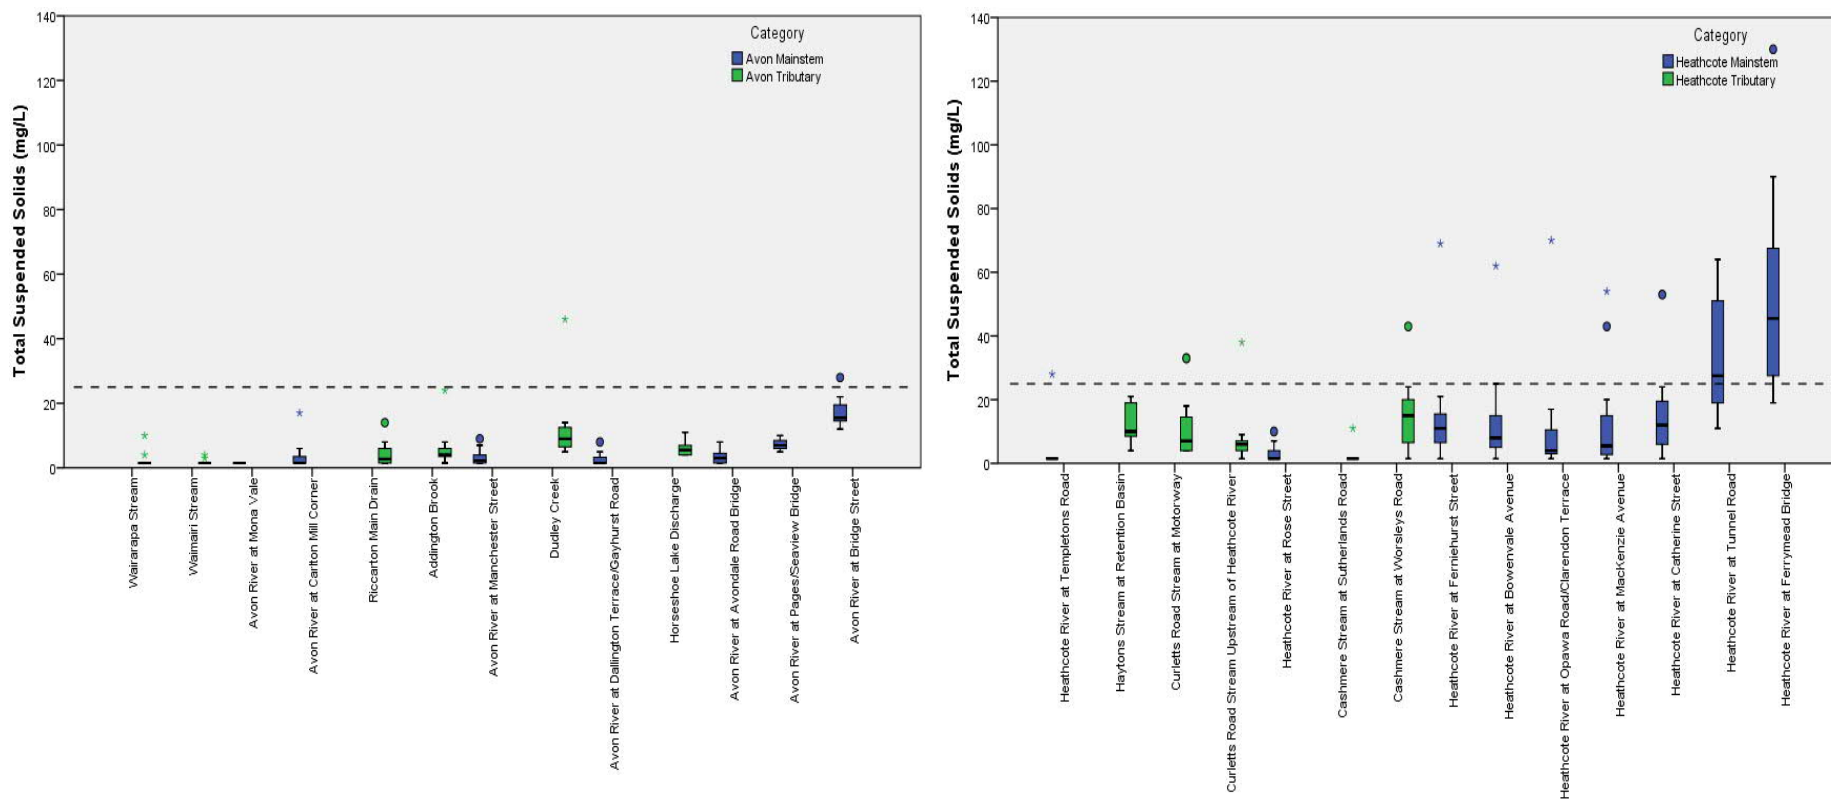


Figure vi (a). Total Suspended Solid (TSS) levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the guideline value of 25 mg/L. The Laboratory Limit of Detection was 3.0 mg/L – analysed as half this value (1.5 mg/L) to allow statistics to be undertaken.

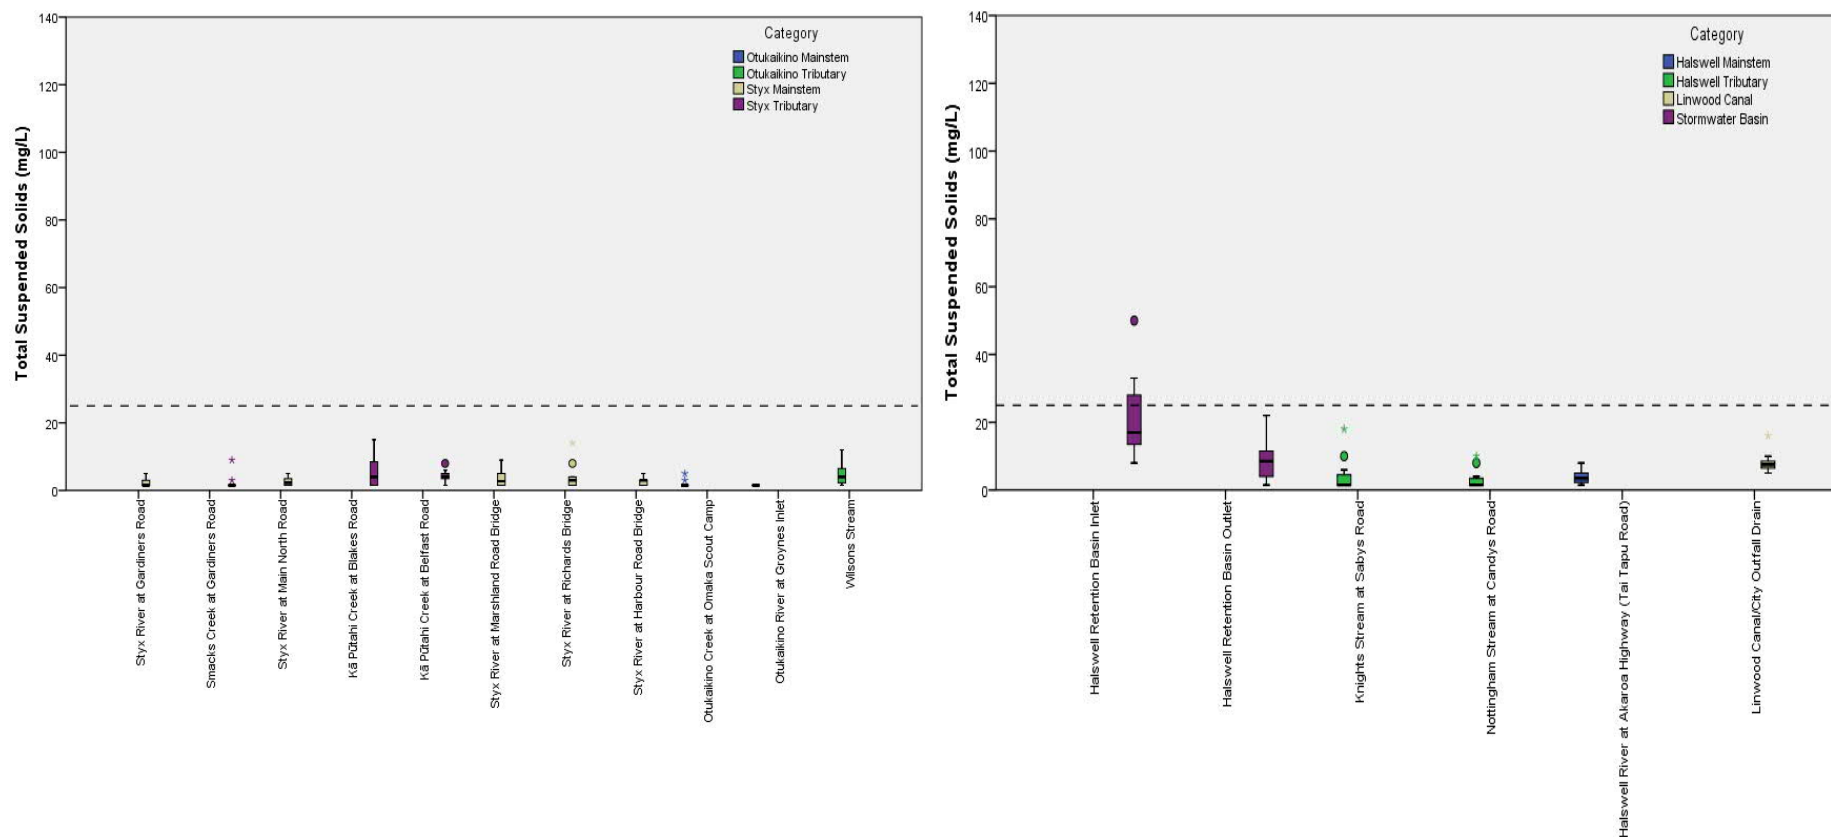


Figure vi (b). Total Suspended Solid (TSS) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the guideline value of 25 mg/L. The Laboratory Limit of Detection was 3.0 mg/L – analysed as half this value (1.5 mg/L) to allow statistics to be undertaken.

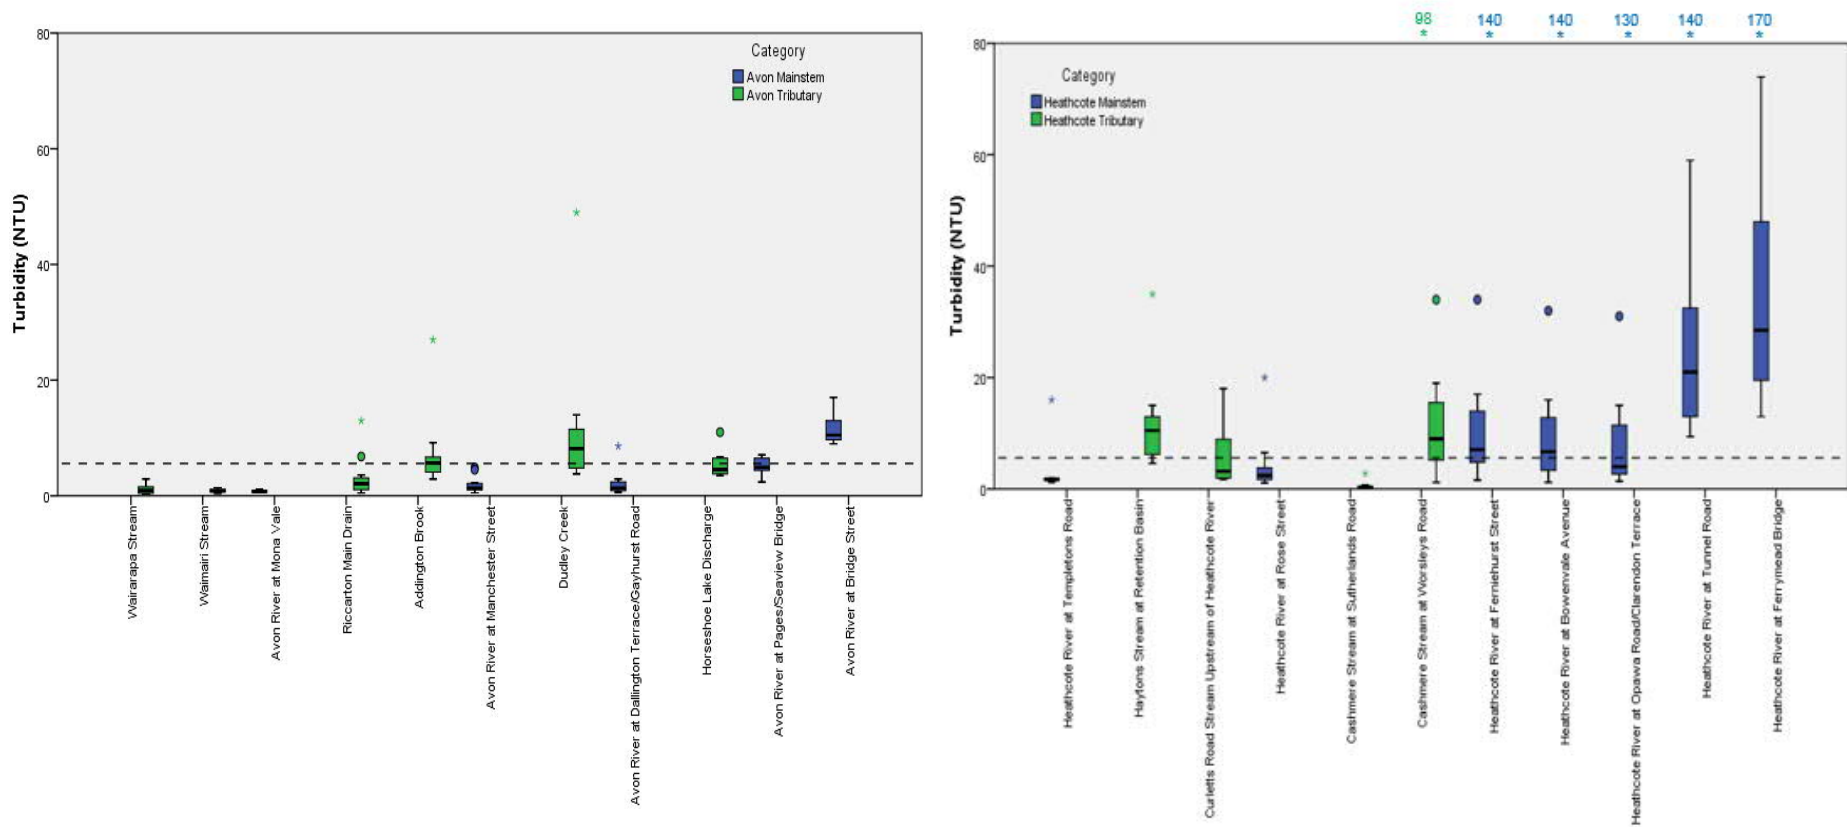


Figure vii (a) .Turbidity levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. The following sites were not measured for this parameter: Avon River at Carlton Mill Corner, Avon River at Avondale Road Bridge, Curletts Road Stream at Motorway, Heathcote River at Catherine Street and Heathcote River at Mackenzie Avenue. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the ANZECC (2000) guideline value of 5.6 Nephelometric Turbidity Units (NTU).

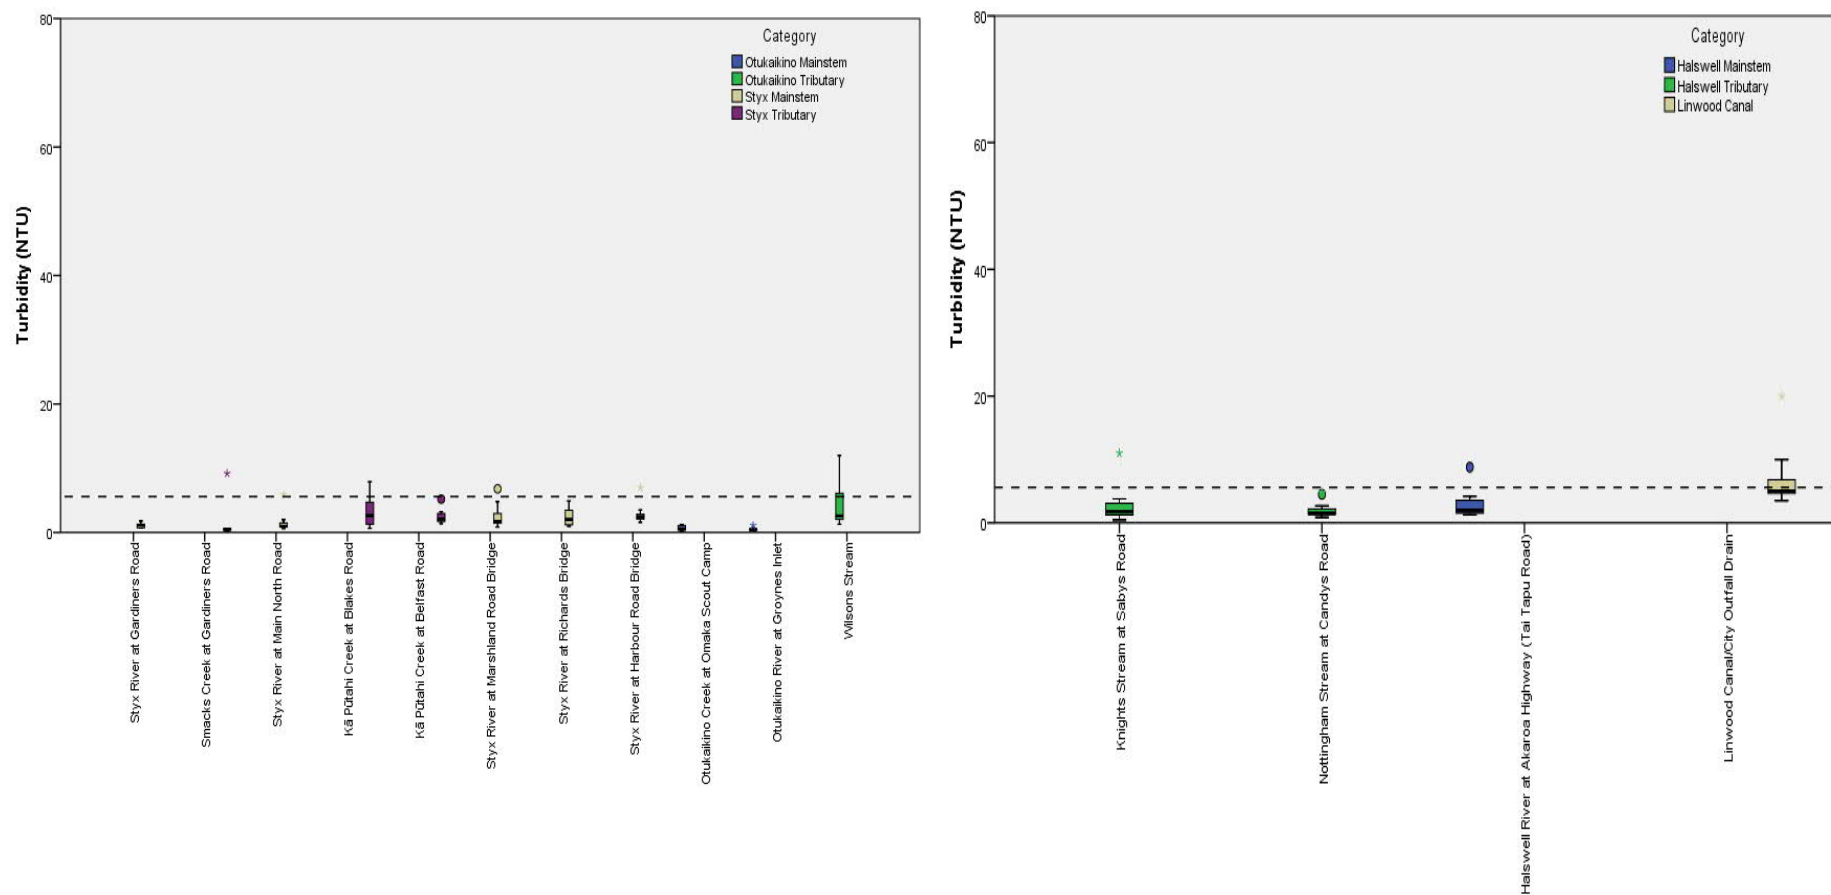


Figure vii (b). Turbidity levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. The following sites were not measured for this parameter: Halswell Retention Basin Inlet and Halswell Retention Basin Outlet. Sites are ordered from upstream to downstream (left to right). No monitoring was undertaken at the Ōtūkaikino Creek at Omapa Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. The dashed lines represent the ANZECC (2000) guideline value of 5.6 Nephelometric Turbidity Units (NTU).

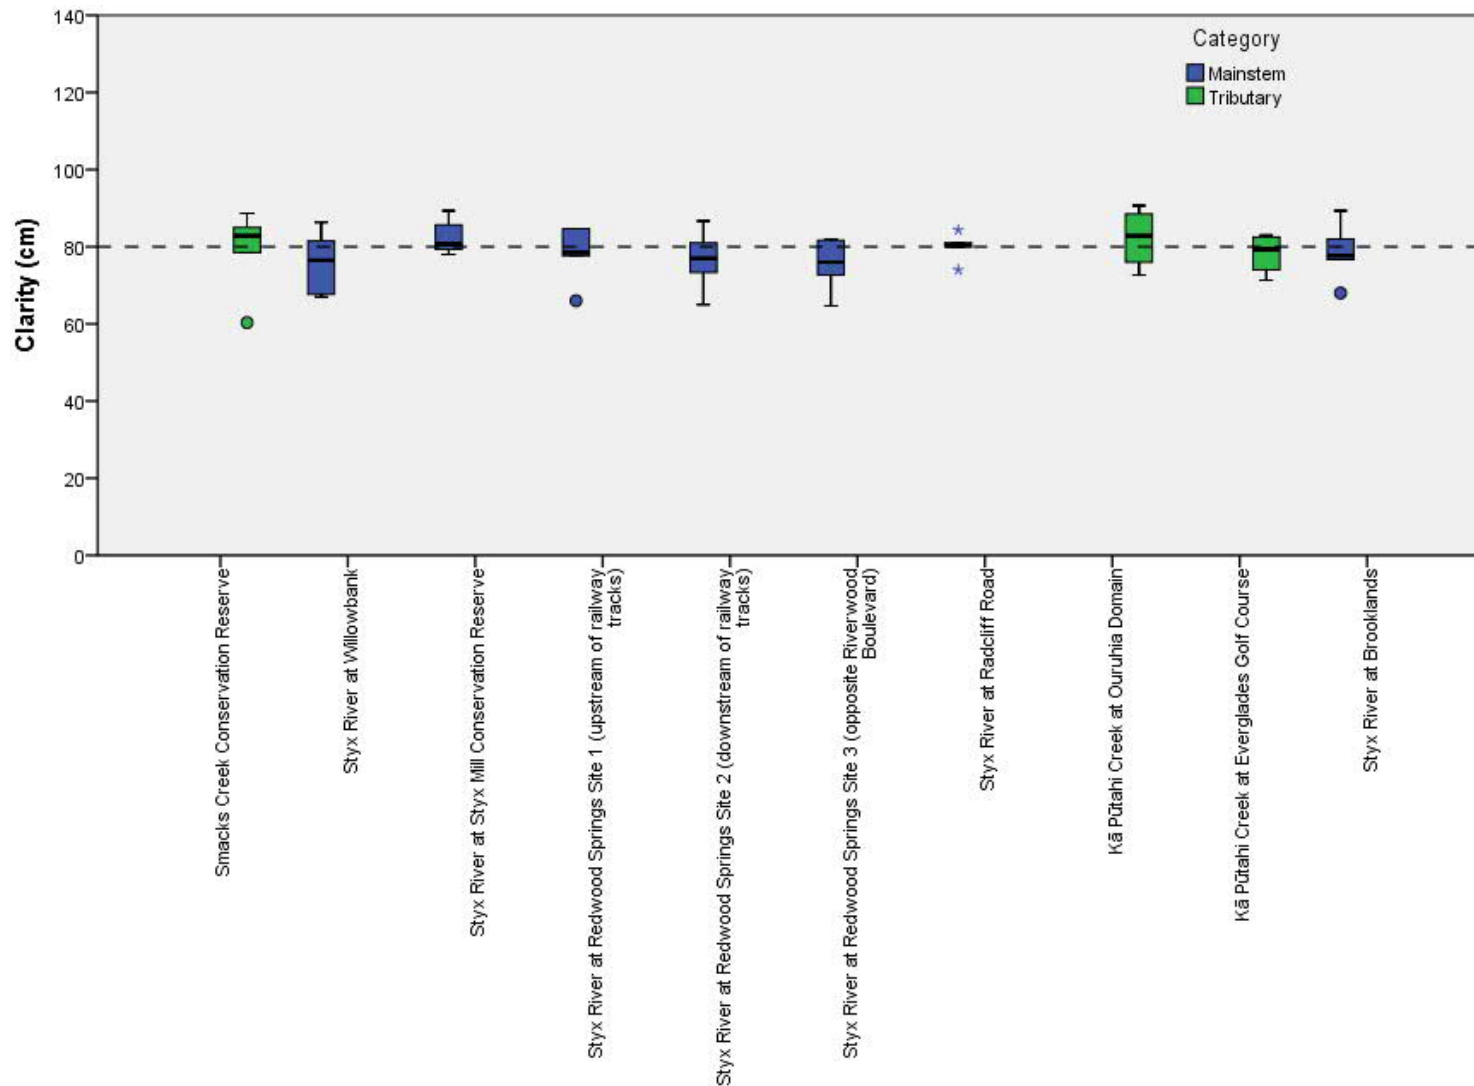


Figure viii. Water clarity levels in water samples taken from the Pūharakekenui/ Styx River catchment by the Styx Living Laboratory Trust volunteers for the monitoring period January to December 2017 (n = 4 – 6 samples per site). Sites are ordered from upstream to downstream (left to right). The dashed line represents the ANZECC (2000) guideline value of 80 cm.

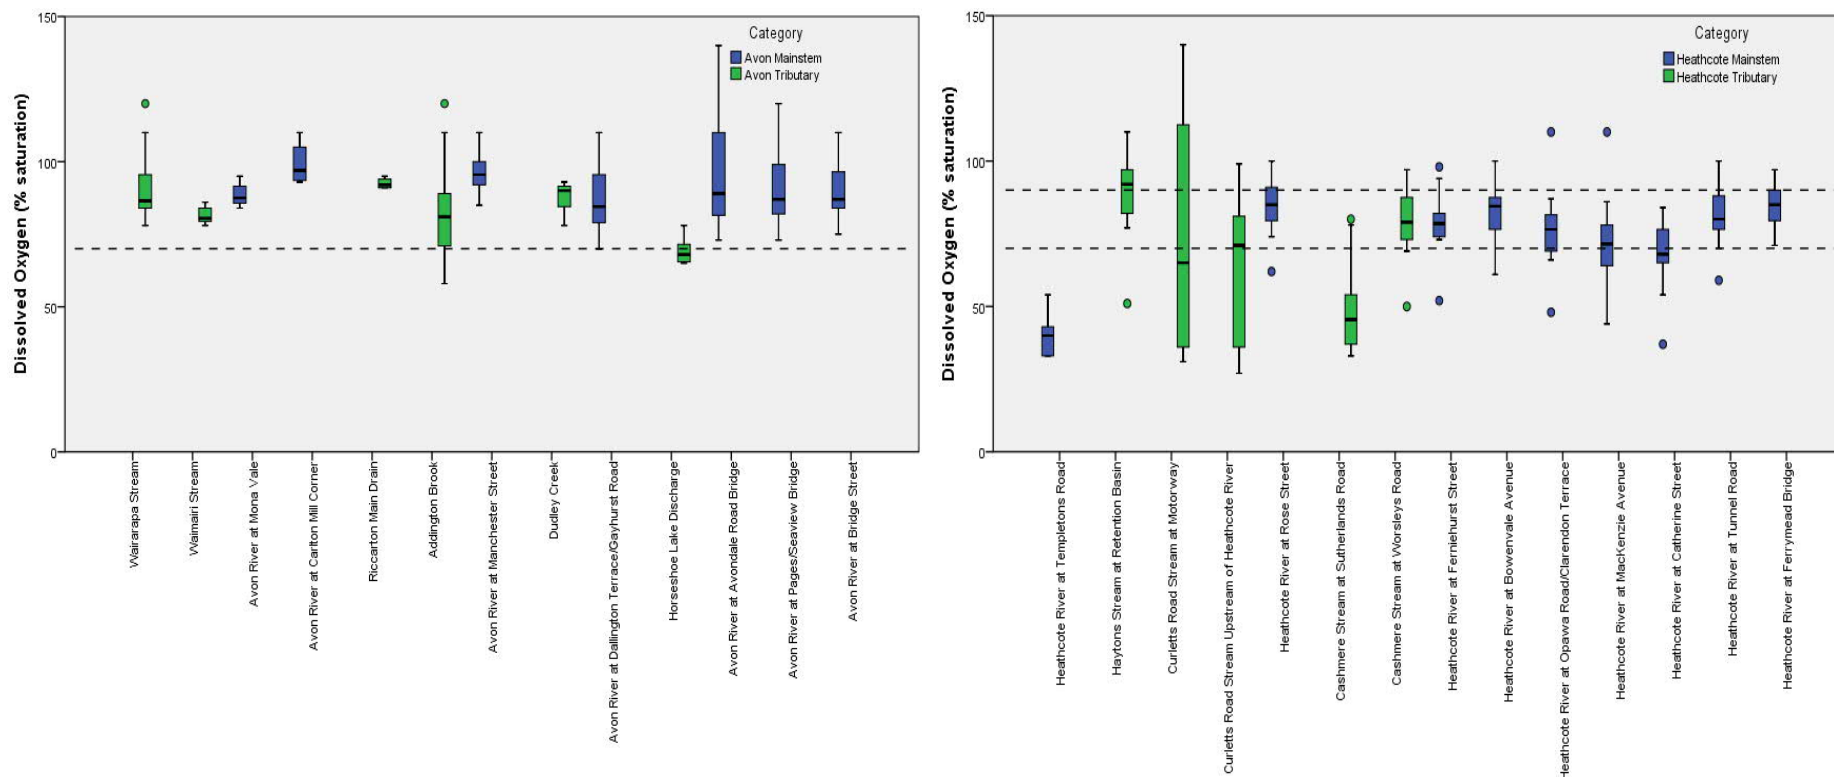


Figure ix (a). Dissolved oxygen levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The lower and upper dashed lines represent the Land and Water Regional Plan minimum guideline value for ‘spring-fed – plains – urban’ and ‘spring-fed – plains’ waterways (70%), and Banks Peninsula waterways (90%; Cashmere Stream only), respectively (Environment Canterbury, 2017).

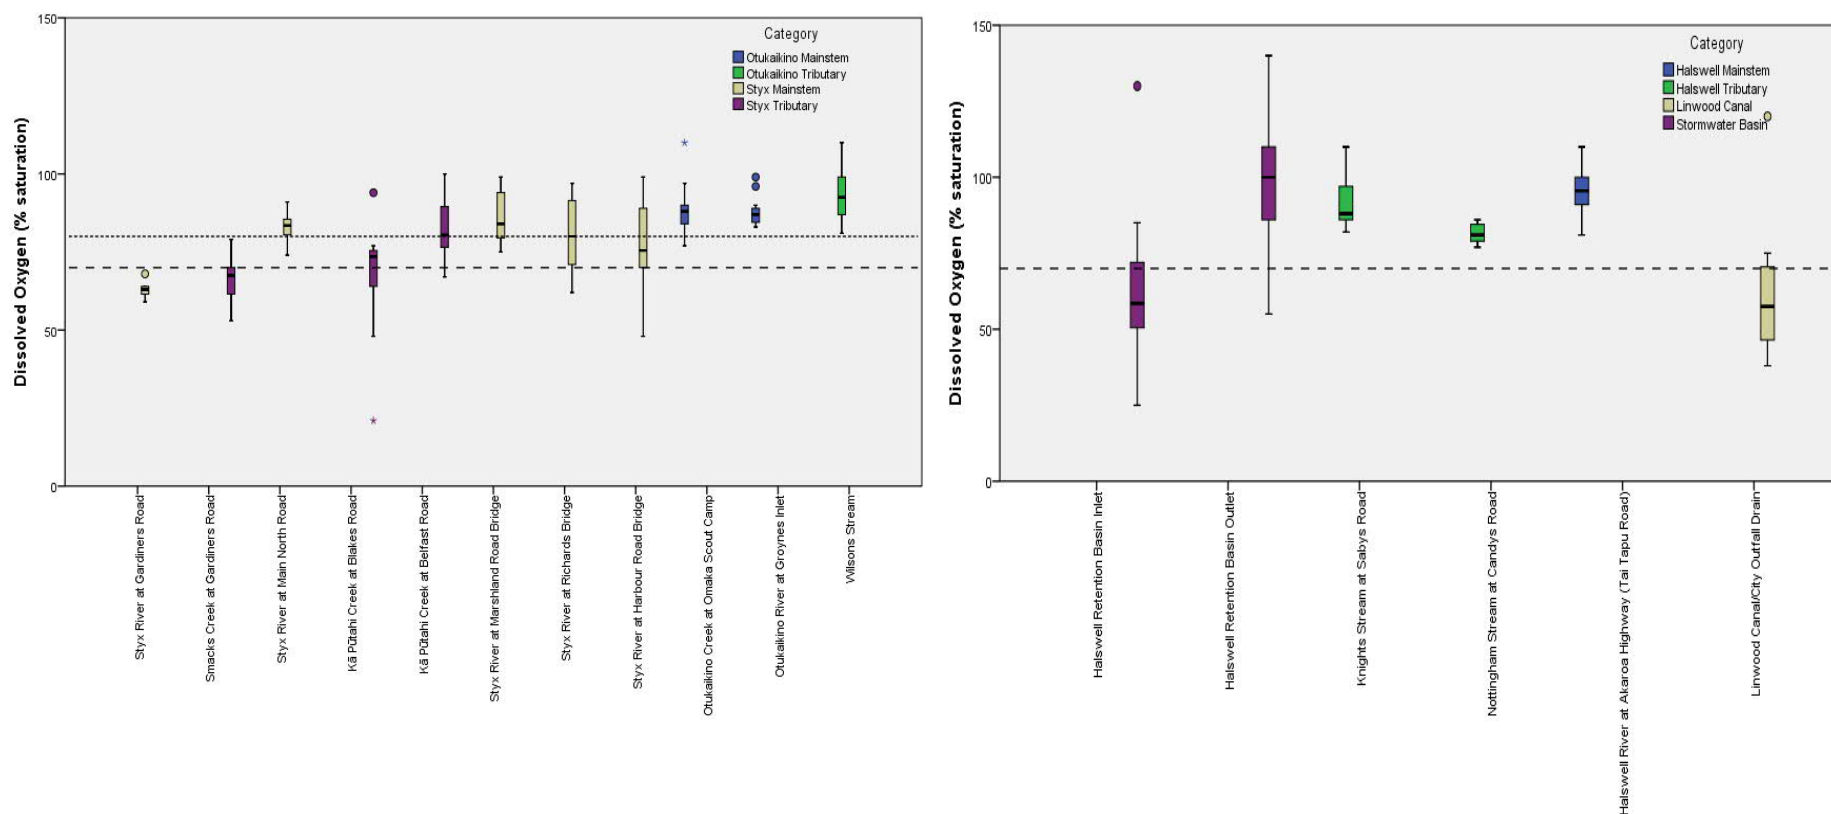


Figure ix (b). Dissolved oxygen levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The lower dashed line represents the Land and Water Regional Plan minimum guideline value for ‘spring-fed – plains – urban’ and ‘spring-fed – plains’ waterways (70%, Environment Canterbury, 2017). The upper dotted line represents the Waimakariri River Regional Plan minimum guideline value for all Ōtūkaikino sites (80%, Environment Canterbury, 2011).

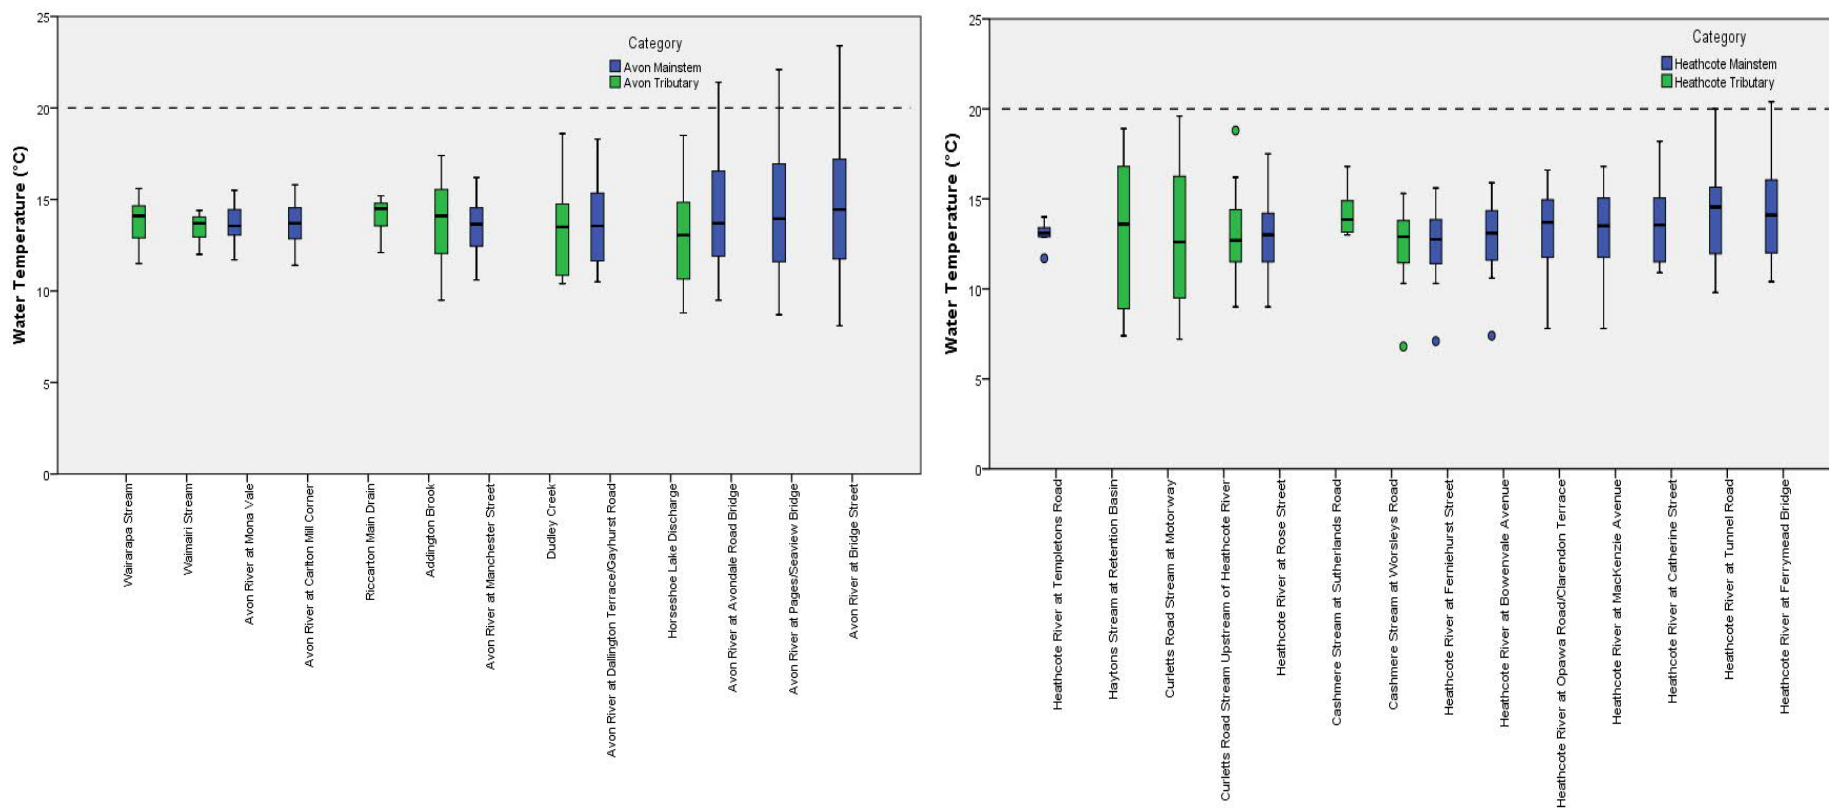


Figure x (a). Temperature of the water at the time of sampling at the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed line represents the Land and Water Regional Plan maximum guideline value (20°C, Environment Canterbury, 2017).

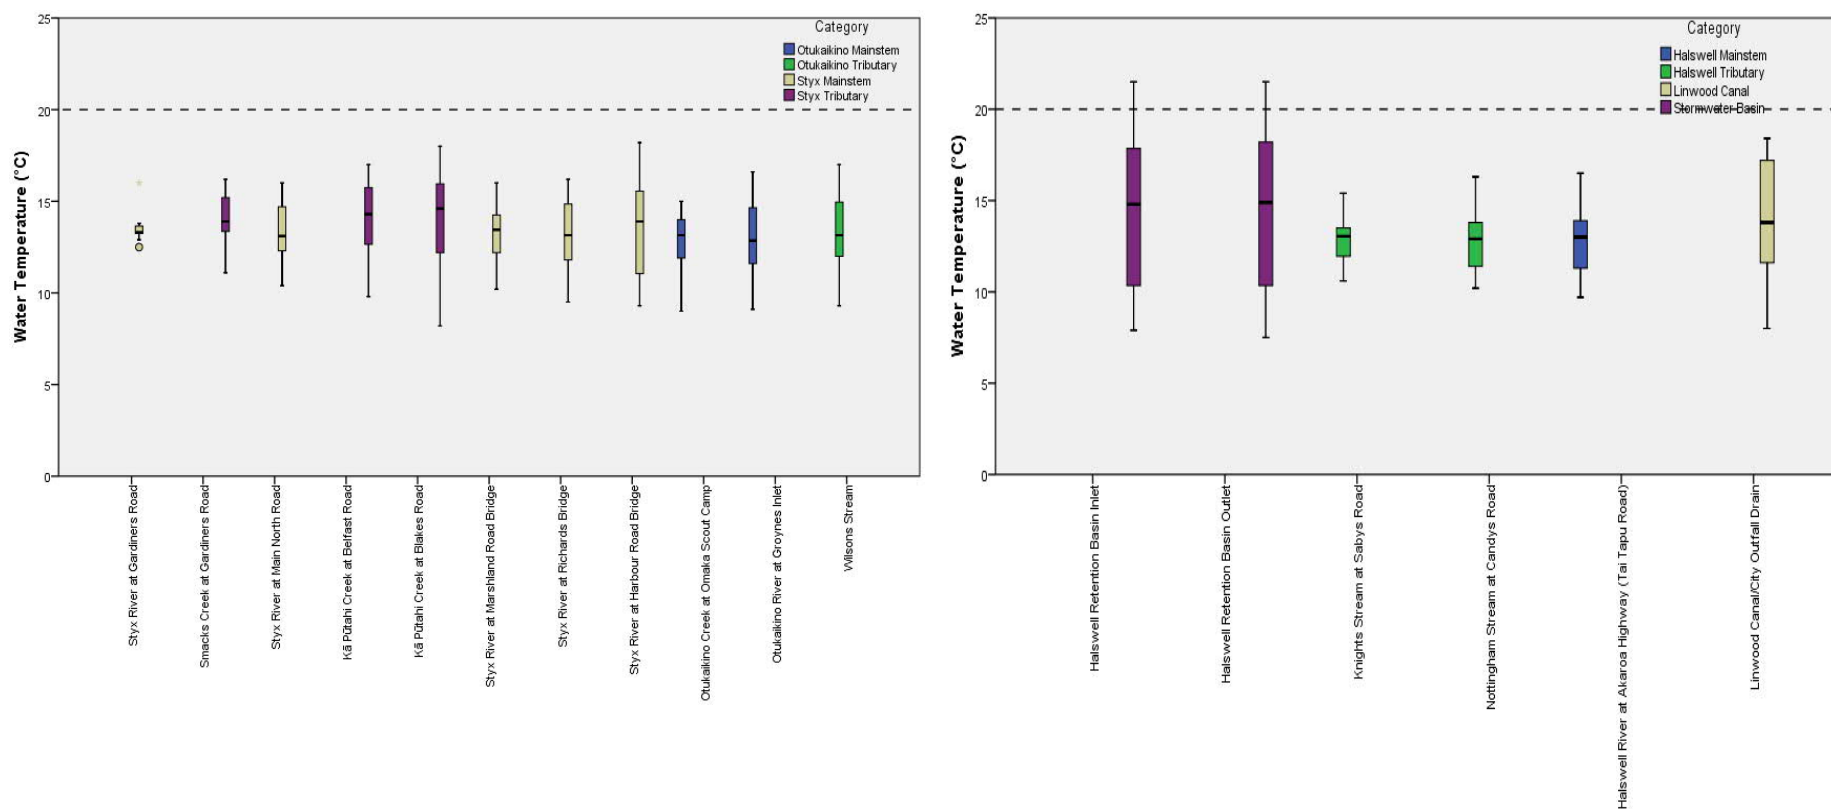


Figure x (b). Temperature of the water at the time of sampling at the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan maximum guideline value (20 °C, Environment Canterbury, 2017). The Waimakariri River Regional Plan maximum guideline value for all Ōtūkaikino sites is 25 °C (Environment Canterbury, 2011), which is not shown as this is equal to the top of the graph.

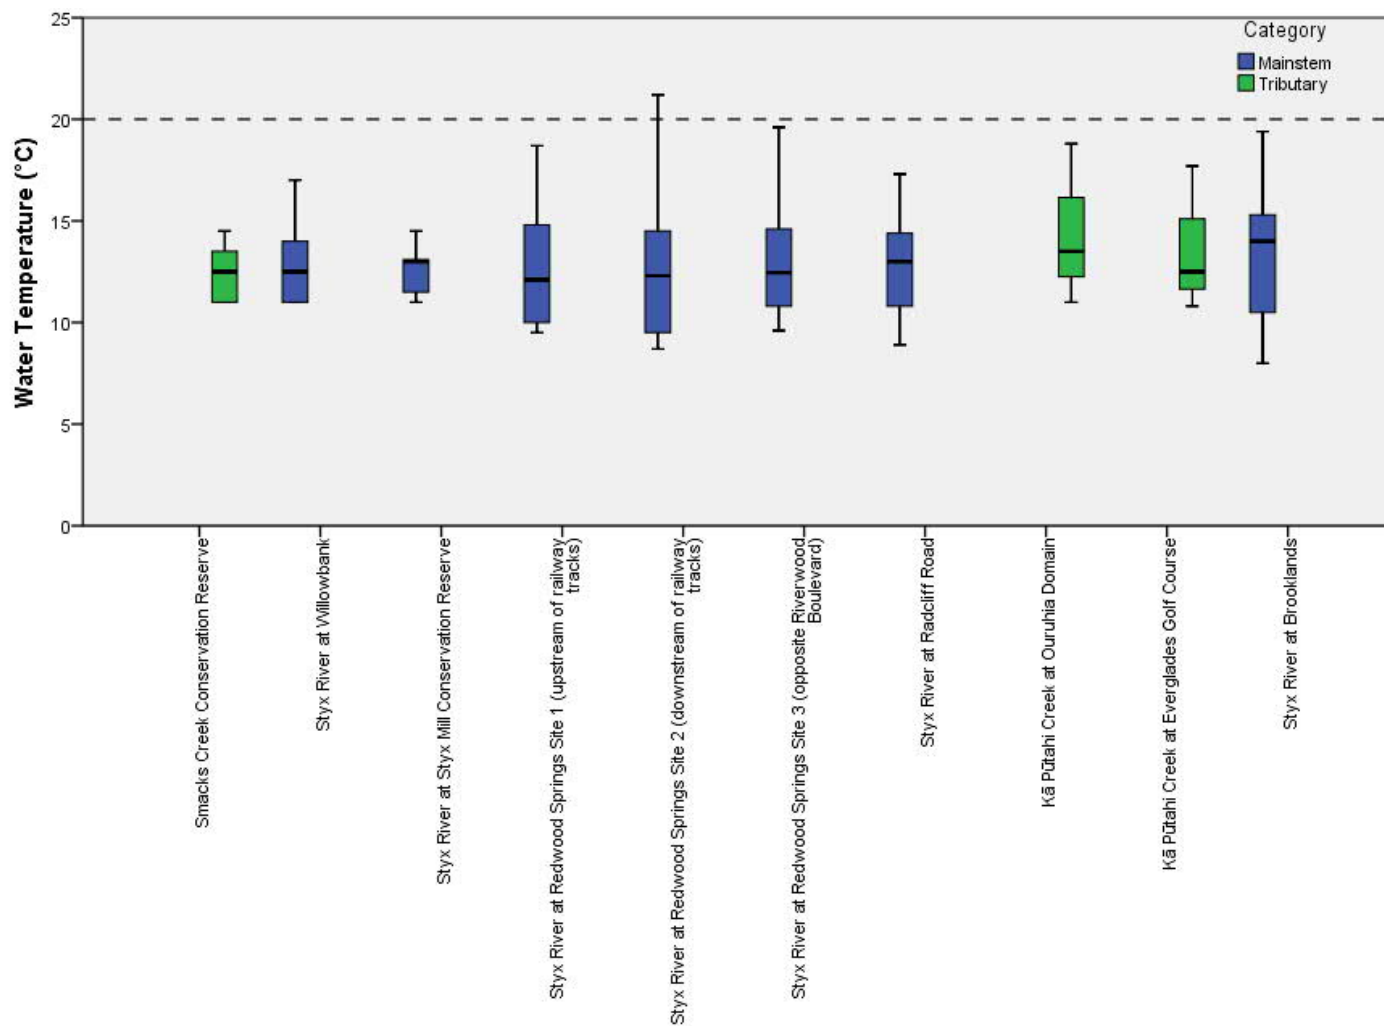


Figure x (c). Temperature of the water at the time of sampling by the Styx Living Laboratory Trust volunteers for the monitoring period January to December 2017 (n = 4 – 6 samples per site). Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan maximum guideline value (20 °C, Environment Canterbury, 2017).

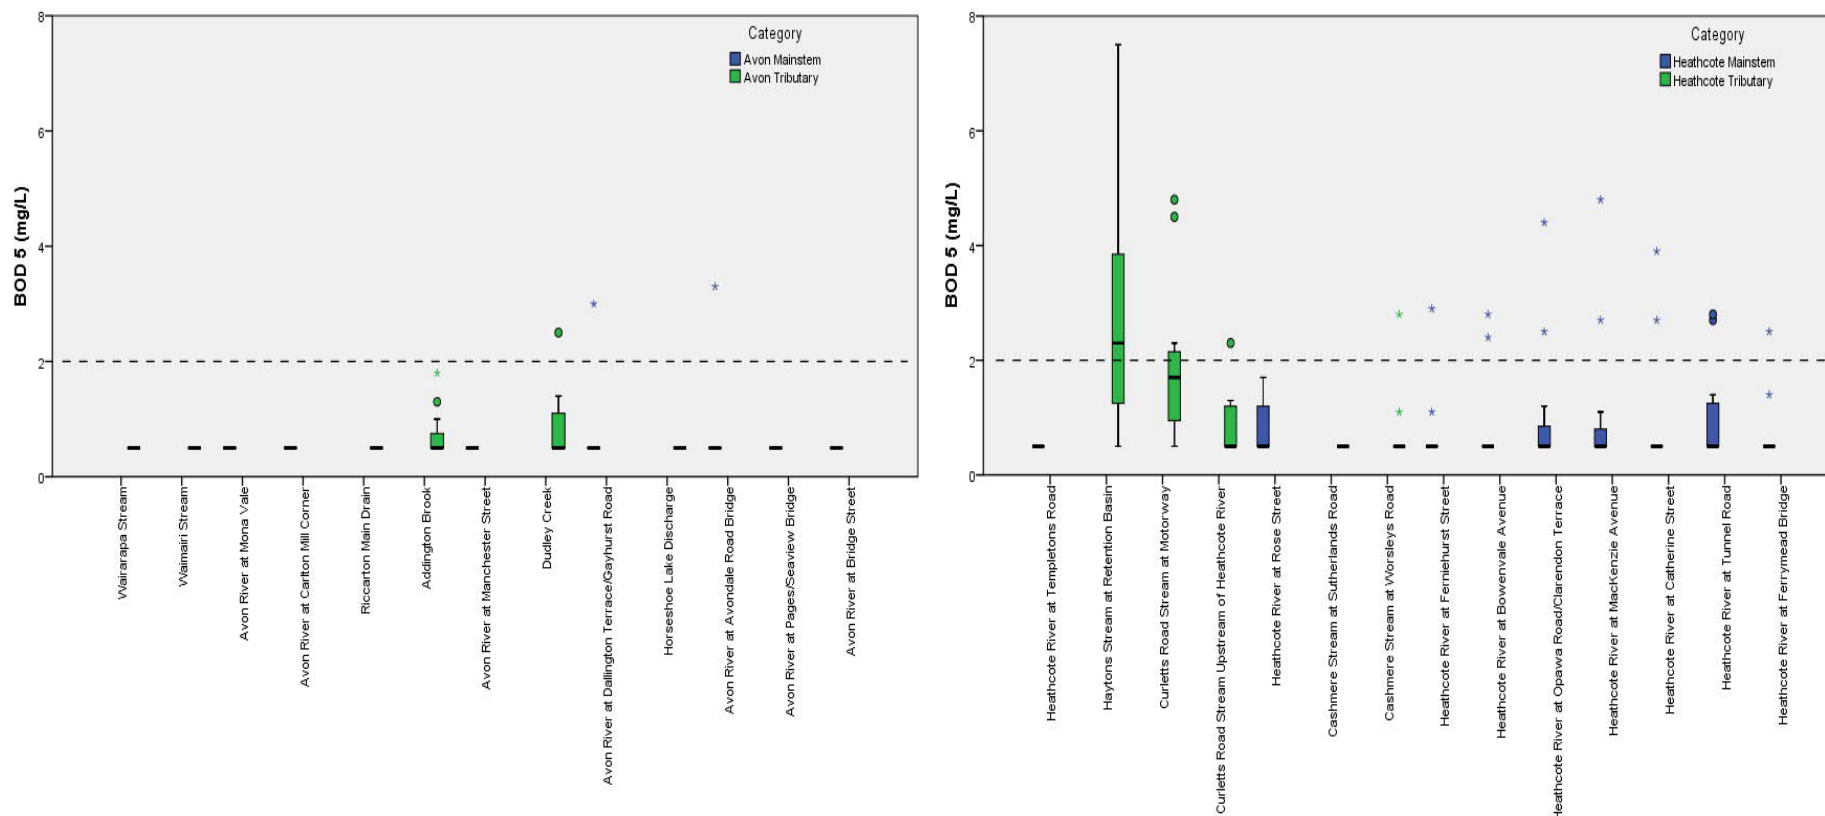


Figure xi (a). Biochemical Oxygen Demand (BOD₅) levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent both the Ministry for the Environment and Waimakariri River Regional Plan guideline value (2 mg/L; Ministry for the Environment, 1992; Environment Canterbury, 2011). The Laboratory Limit of Detection was 1.0 mg/L, analysed as half this value (0.5 mg/L) to allow statistics to be undertaken.

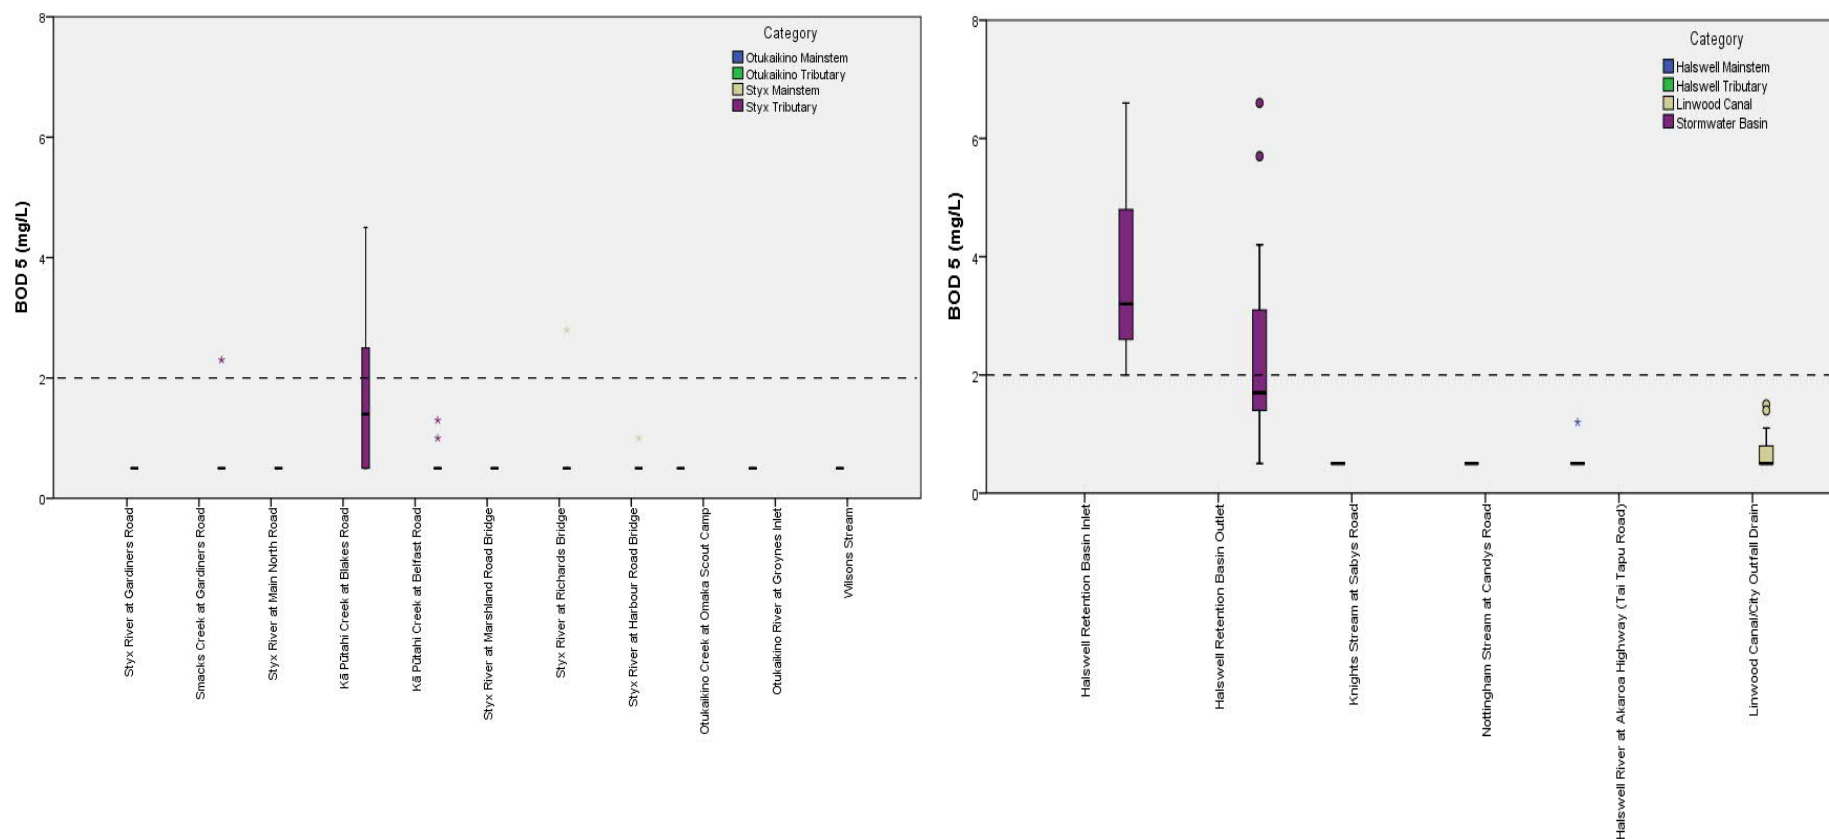


Figure xi (b). Biochemical Oxygen Demand (BOD₅) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent both the Waimakariri River Regional Plan and Ministry for the Environment guideline value (2 mg/L; Ministry for the Environment, 1992; Environment Canterbury, 2011). The Laboratory Limit of Detection was 1.0 mg/L, analysed as half this value (0.5 mg/L) to allow statistics to be undertaken.

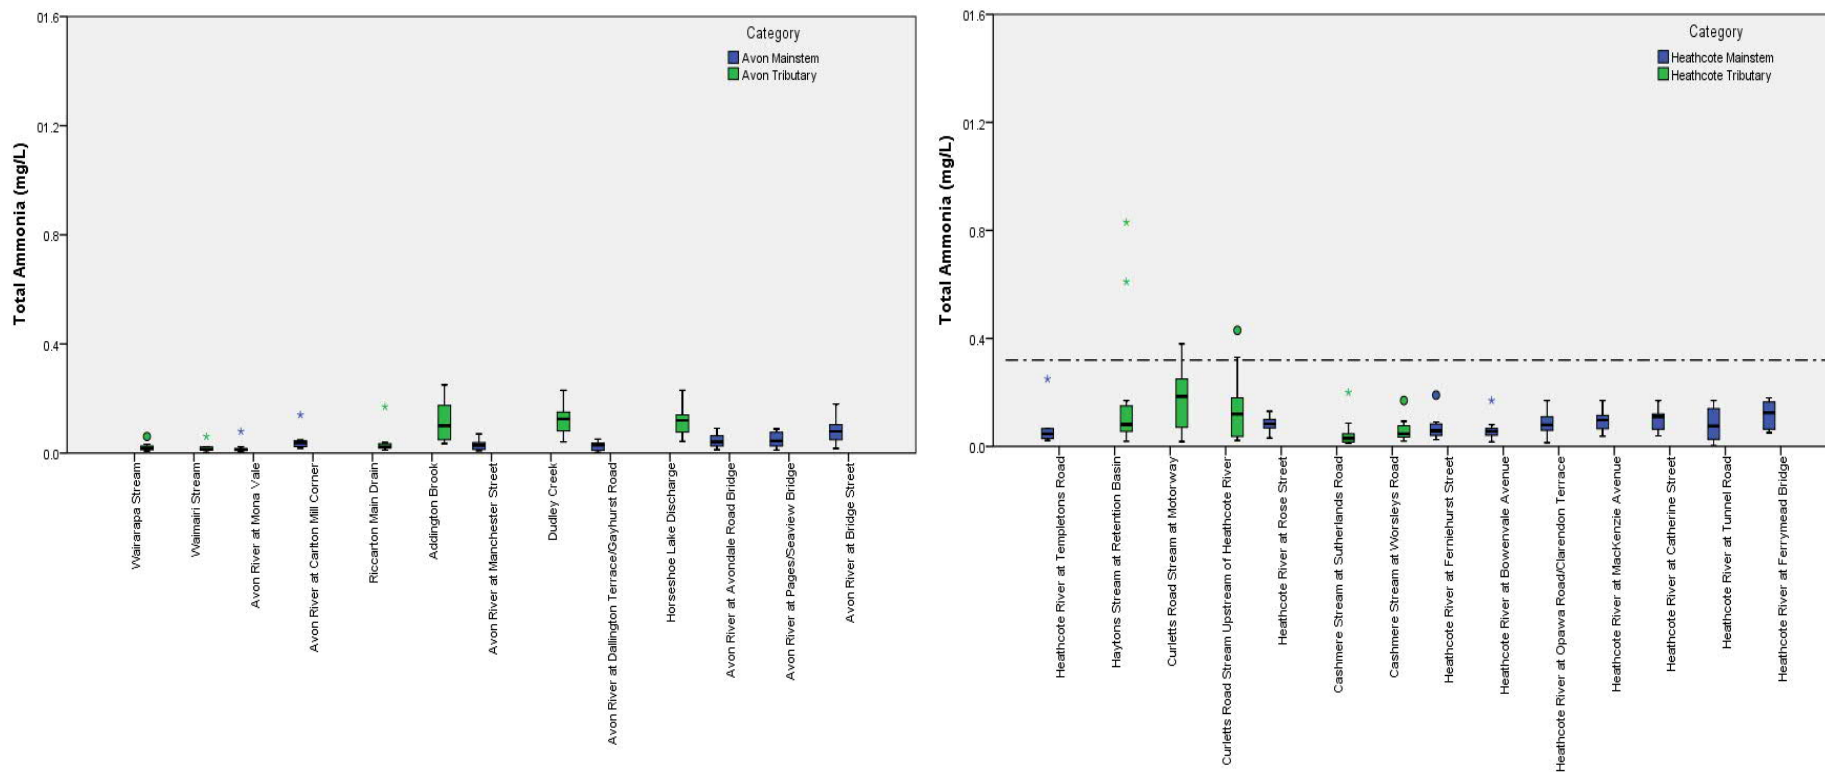


Figure xii (a). Total ammonia levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The Land and Water Regional Plan guideline value of 1.88 mg/L (Environment Canterbury, 2017), which has been adjusted in accordance with median pH levels for the monitoring period of 7.3 for both the Ōtākaro/ Avon and Ōpāwaho/ Heathcote catchments, is not presented on the graph as it is off the scale. The dash-dot line represents the Land and Water Regional Plan maximum guideline value for Banks Peninsula waterways (0.32 mg/L, Cashmere Stream only; Environment Canterbury, 2017). The Laboratory Limit of Detection was 0.005 mg/L – analysed as half this value (0.0025 mg/L) to allow statistics to be undertaken.

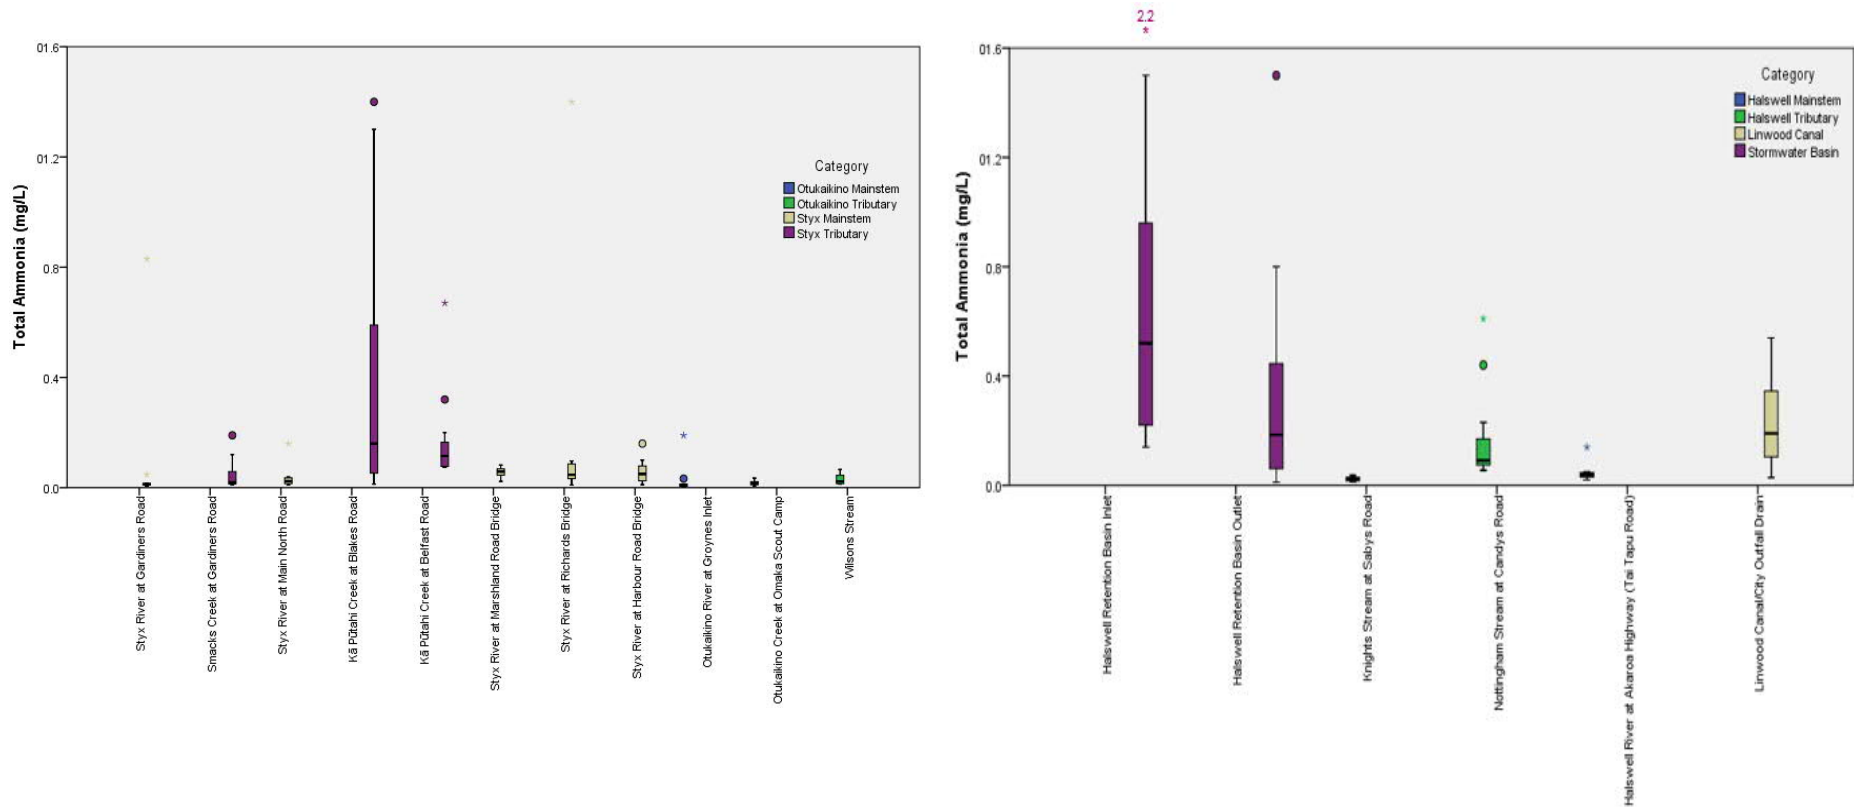


Figure xii (b). Total ammonia levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The Land and Water Regional Plan guideline values (Pūharakekenui/ Styx catchment: 1.99 mg/L, Ōtūkaikino catchment: 2.09 mg/L, Huritini/ Halswell catchment: 1.75 mg/L, Linwood Canal: 1.75 mg/L; Environment Canterbury, 2017), adjusted in accordance with median pH levels for the monitoring period (Pūharakekenui/ Styx catchment: 7.2, Ōtūkaikino catchment: 7.1, Huritini/ Halswell catchment: 7.4, Linwood Canal: 7.4), are not presented on the graph as they are off the scale. The Laboratory Limit of Detection was 0.005 mg/L – analysed as half this value (0.0025 mg/L) to allow statistics to be undertaken.

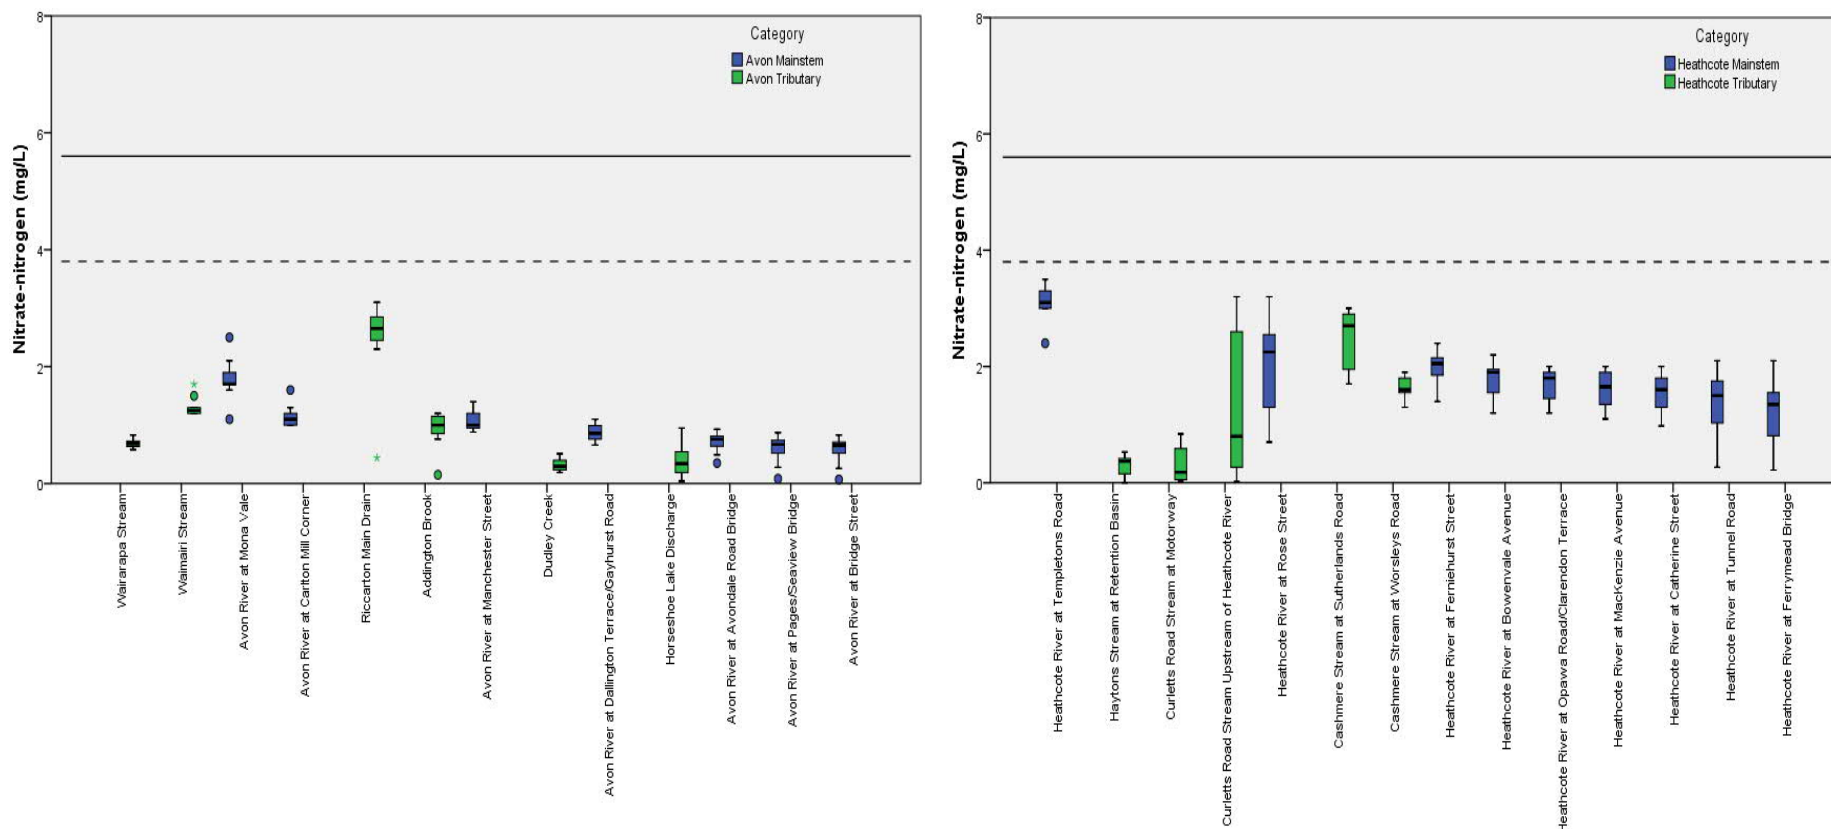


Figure xiii (a). Nitrate-nitrogen levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed and solid lines represent the Hickey (2013) grading (3.8 mg/L) and surveillance (5.6 mg/L) guideline levels, respectively. The Laboratory Limit of Detection was 0.05 mg/L – analysed as half this value (0.025 mg/L) to allow statistics to be undertaken.

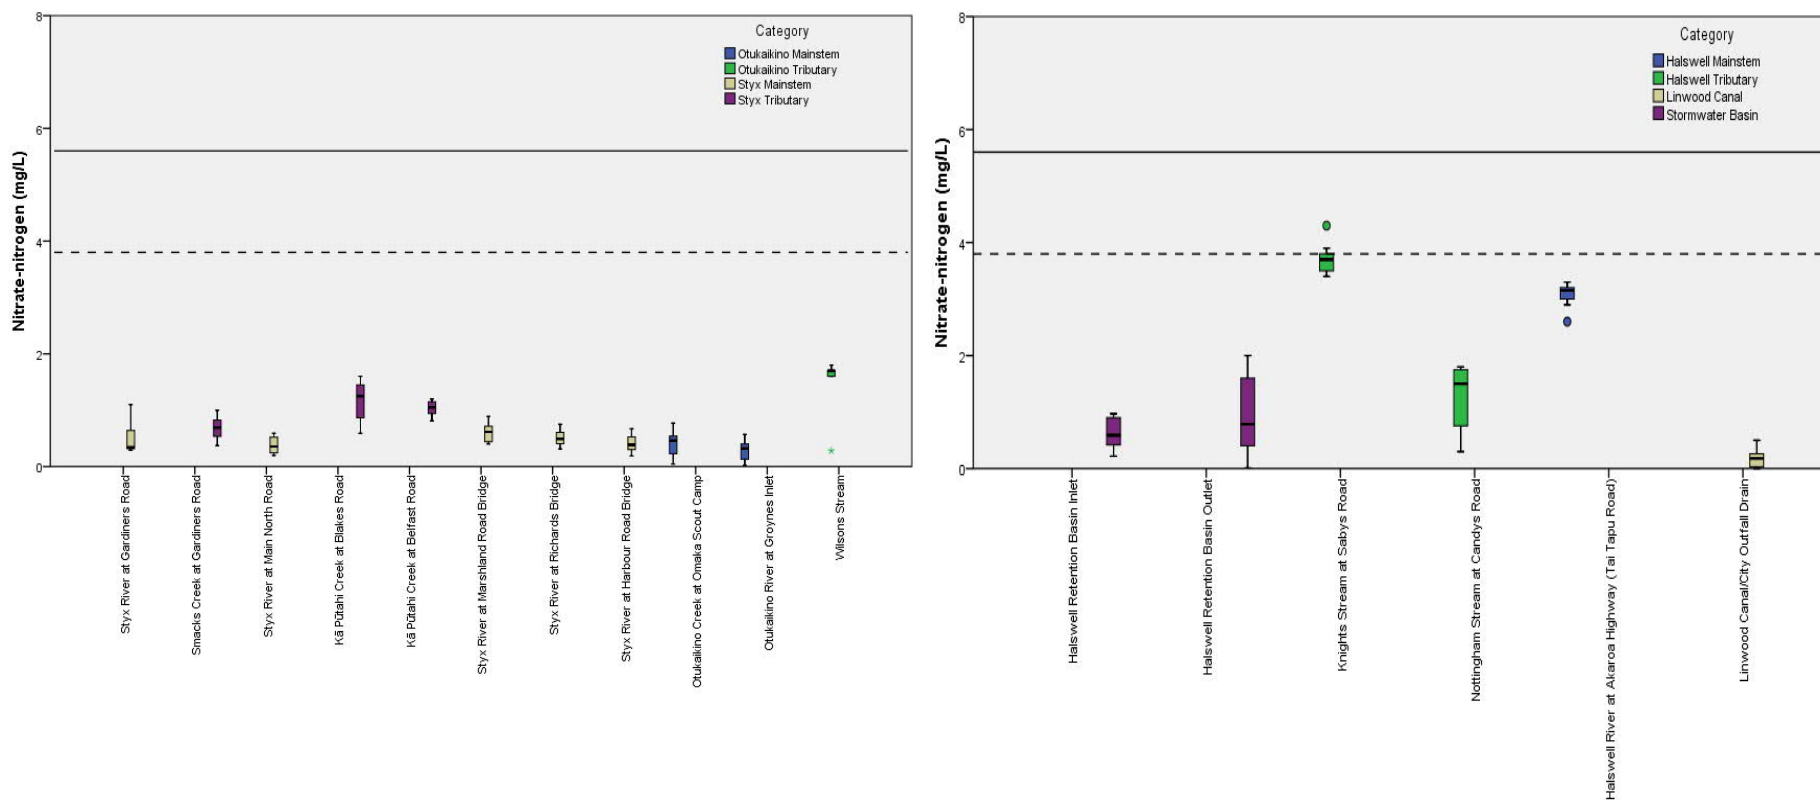


Figure xiii (b). Nitrate levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino Rivers (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed and solid lines represent the Hickey (2013) grading (3.8 mg/L) and surveillance (5.6 mg/L) guideline levels, respectively. The Laboratory Limit of Detection was 0.05 mg/L – analysed as half this value (0.025 mg/L) to allow statistics to be undertaken.

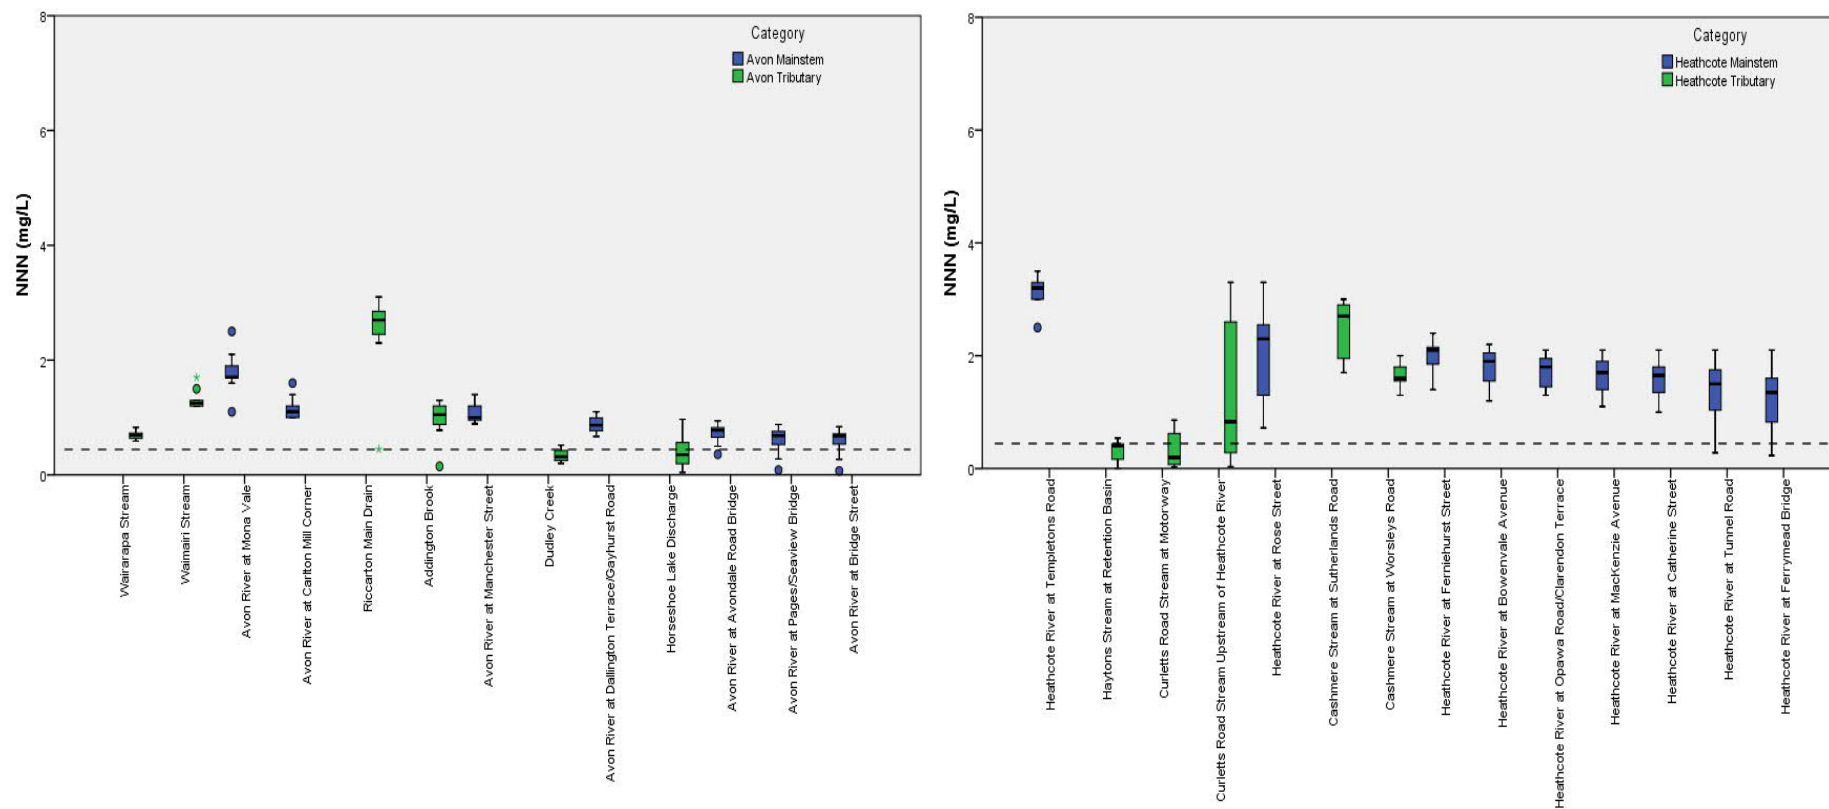


Figure xiv (a). Nitrate Nitrite Nitrogen (NNN) in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the ANZECC water quality guideline (0.444 mg/L; ANZECC, 2000).

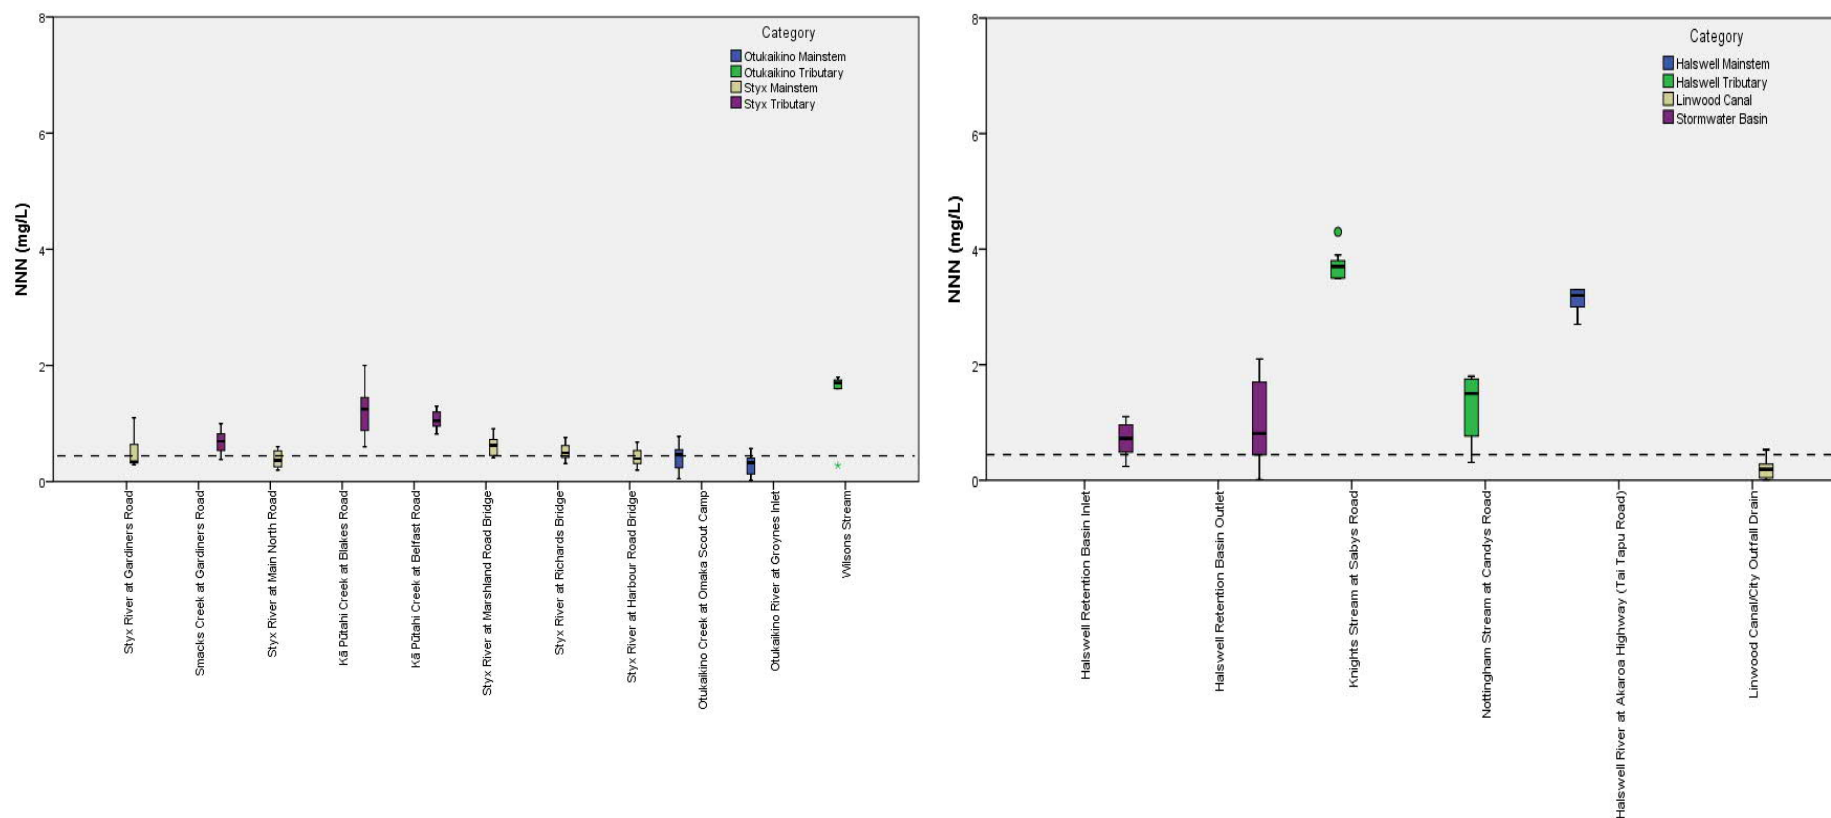


Figure xiv (b). Nitrate Nitrite Nitrogen (NNN) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the ANZECC water quality guideline (0.444 mg/L; ANZECC, 2000). The Laboratory Limit of Detection was 0.005 mg/L – analysed as half this value (0.0025 mg/L) to allow statistics to be undertaken.

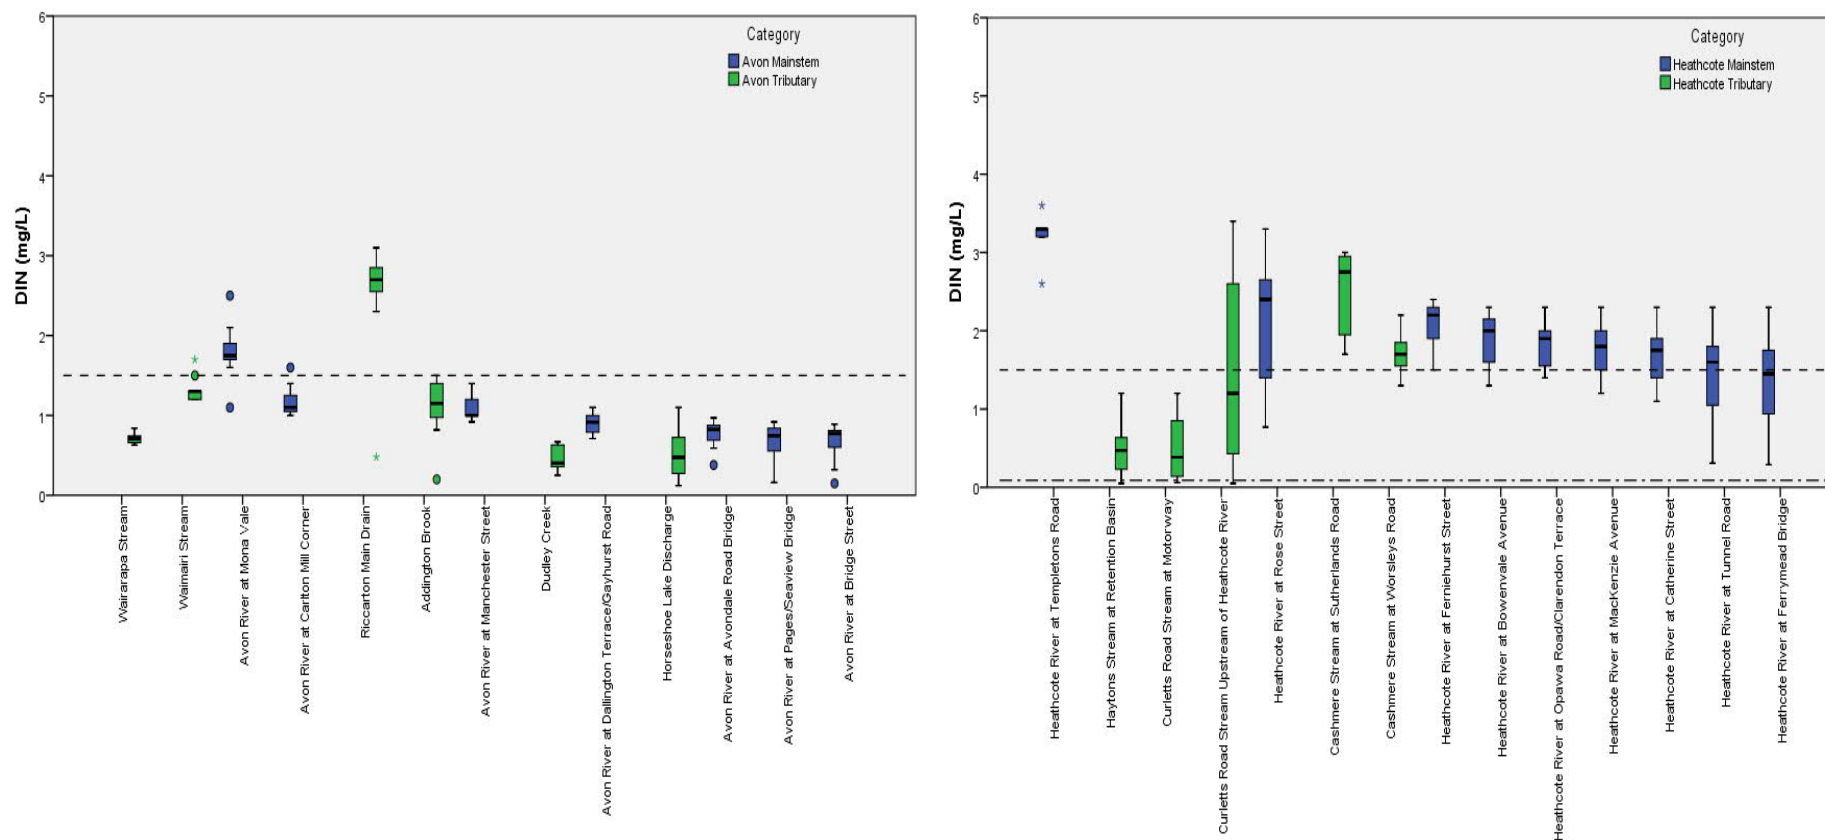


Figure xv (a). Dissolved Inorganic Nitrogen (DIN) levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger value of 1.5 mg/L for ‘spring-fed – plains – urban’ and ‘spring-fed – plains’ waterways, and 0.09 mg/L for Banks Peninsula waterways (Cashmere Stream only), respectively (Environment Canterbury, 2017).

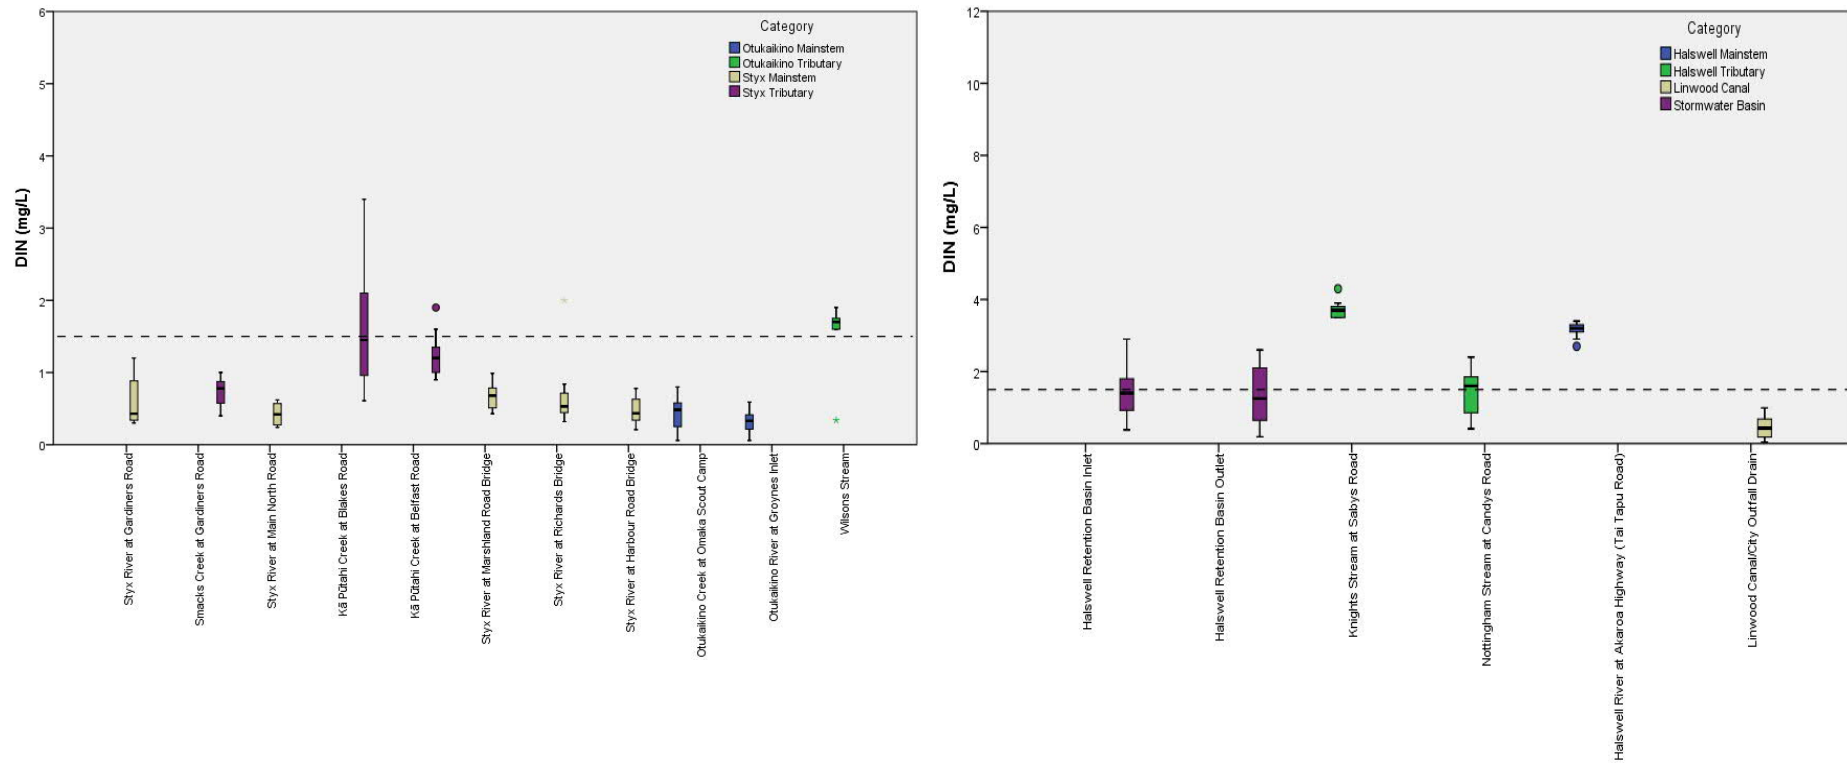


Figure xv (b). Dissolved Inorganic Nitrogen (DIN) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger value for 'spring-fed – plains – urban' and 'spring-fed – plains' waterways of 1.5 mg/L (Environment Canterbury, 2017). The Laboratory Limit of Detection was 0.02 mg/L – analysed as half this value (0.01 mg/L) to allow statistics to be undertaken.

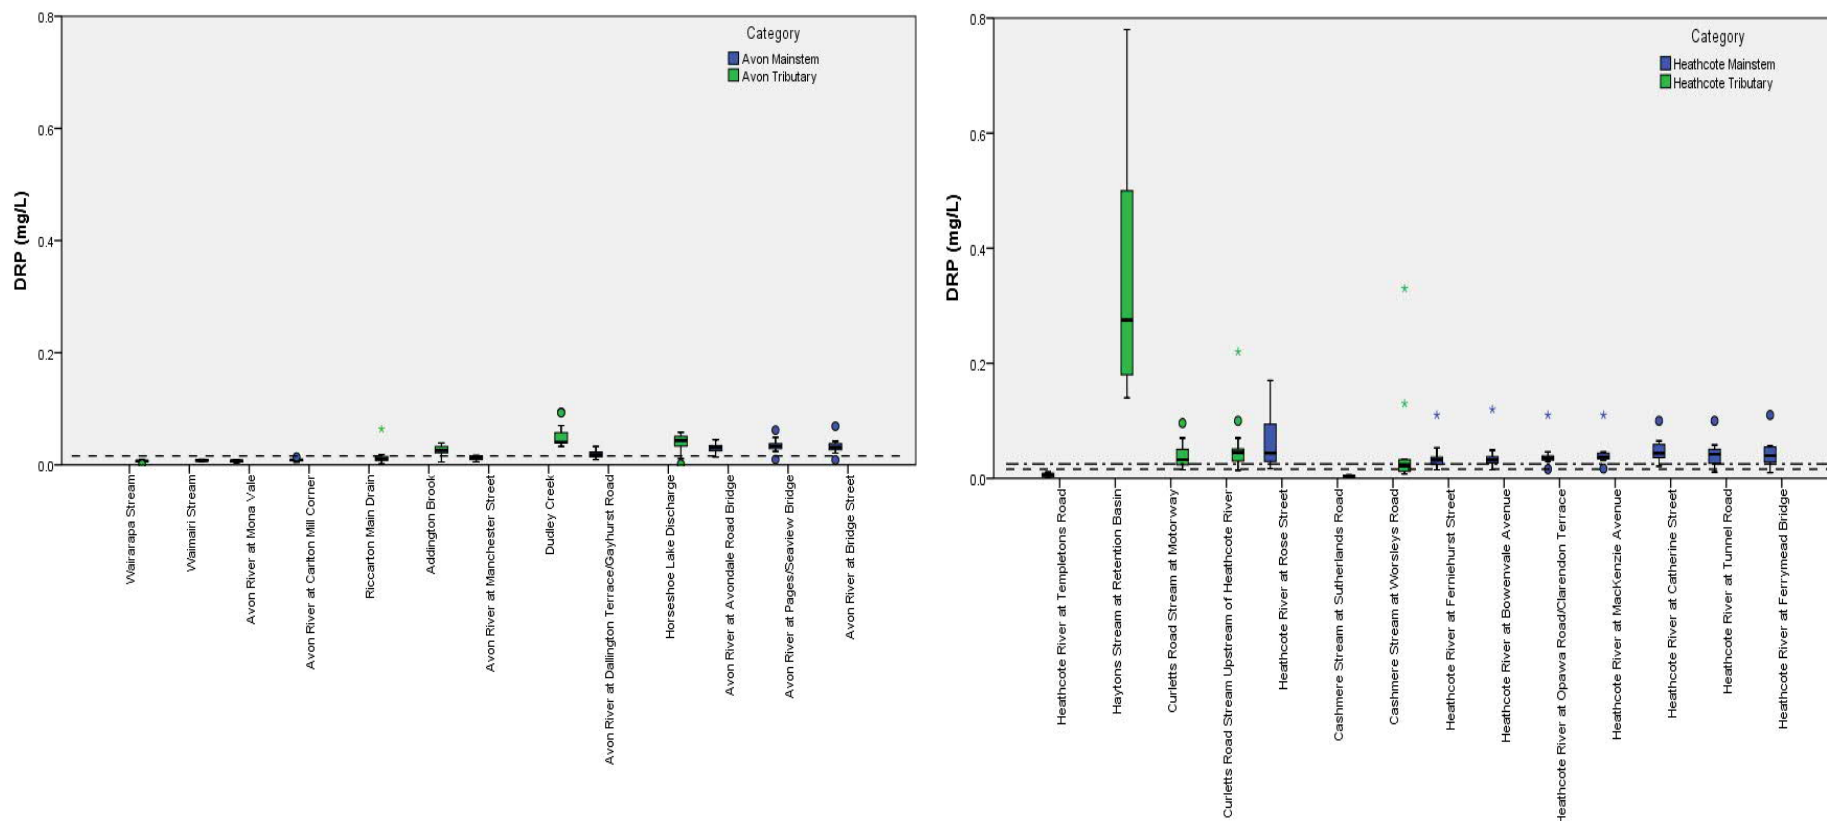


Figure xvi (a). Dissolved Reactive Phosphorus (DRP) levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger value of 0.016 mg/L for ‘spring-fed – plains – urban’ and ‘spring-fed – plains’ waterways, and the dash-dot line (right graph only), represents the Land and Water Regional Plan trigger value of 0.025 mg/L for Banks Peninsula waterways (Cashmere Stream only), (Environment Canterbury, 2017). The Laboratory Limit of Detection was 0.003 mg/L, analysed as half this value (0.0015 mg/L) to allow statistics to be undertaken.

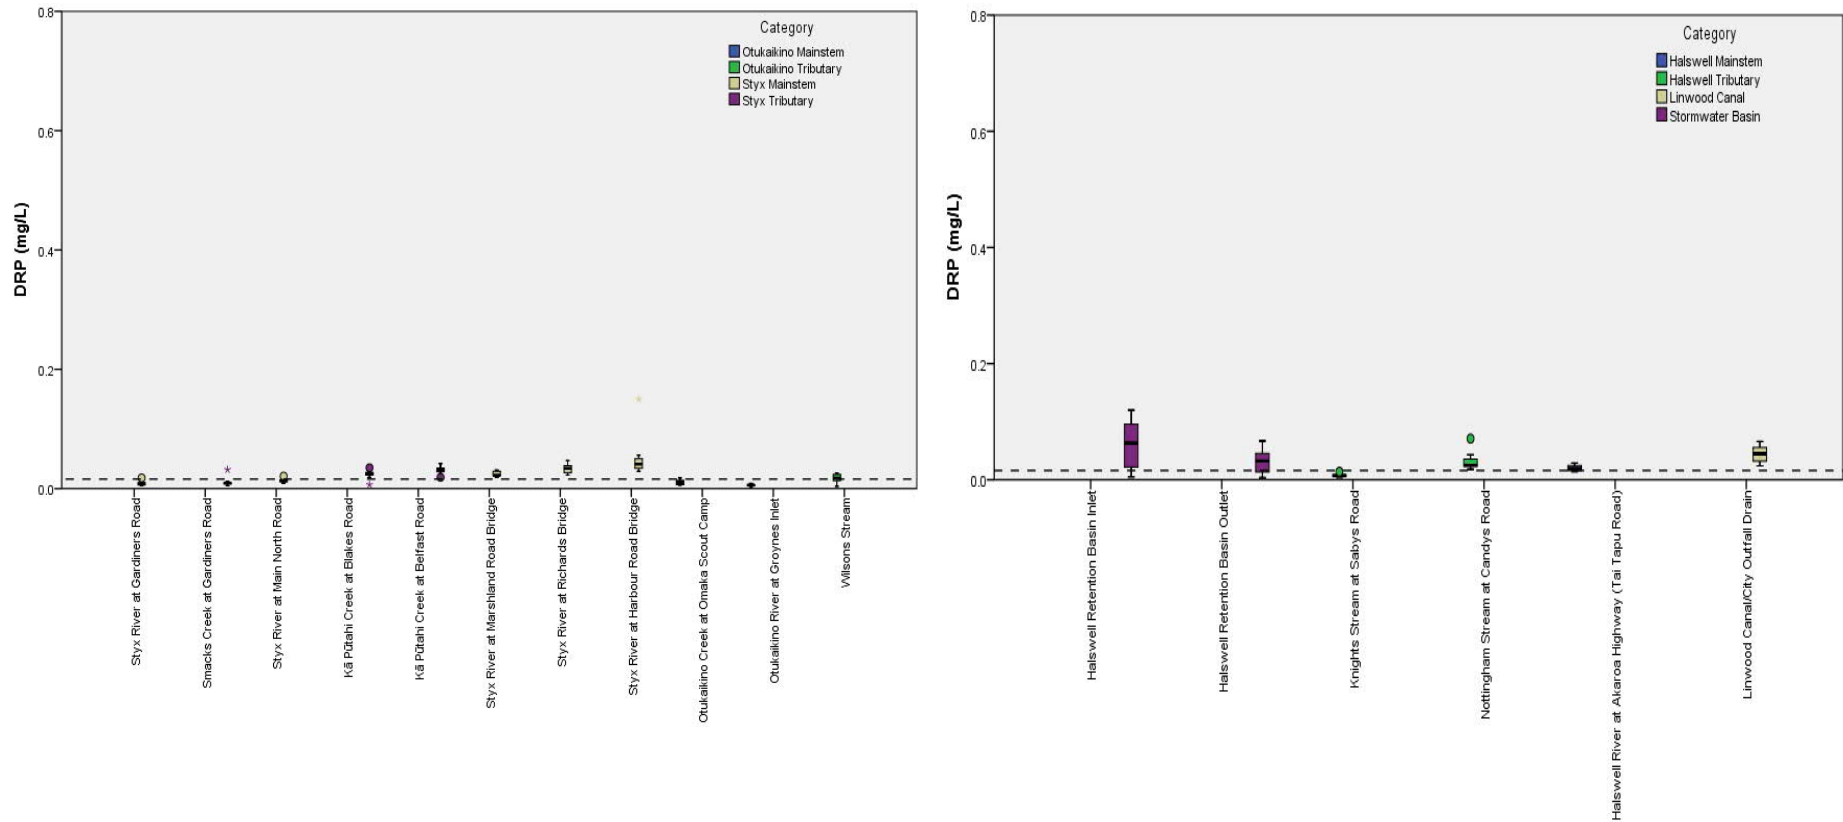


Figure xvi (b). Dissolved Reactive Phosphorus (DRP) levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger value of 0.016 mg/L for 'spring-fed – plains – urban' and 'spring-fed – plains' waterways (Environment Canterbury, 2017). The Laboratory Limit of Detection was 0.003 mg/L, analysed as half this value (0.0015 mg/L) to allow statistics to be undertaken.

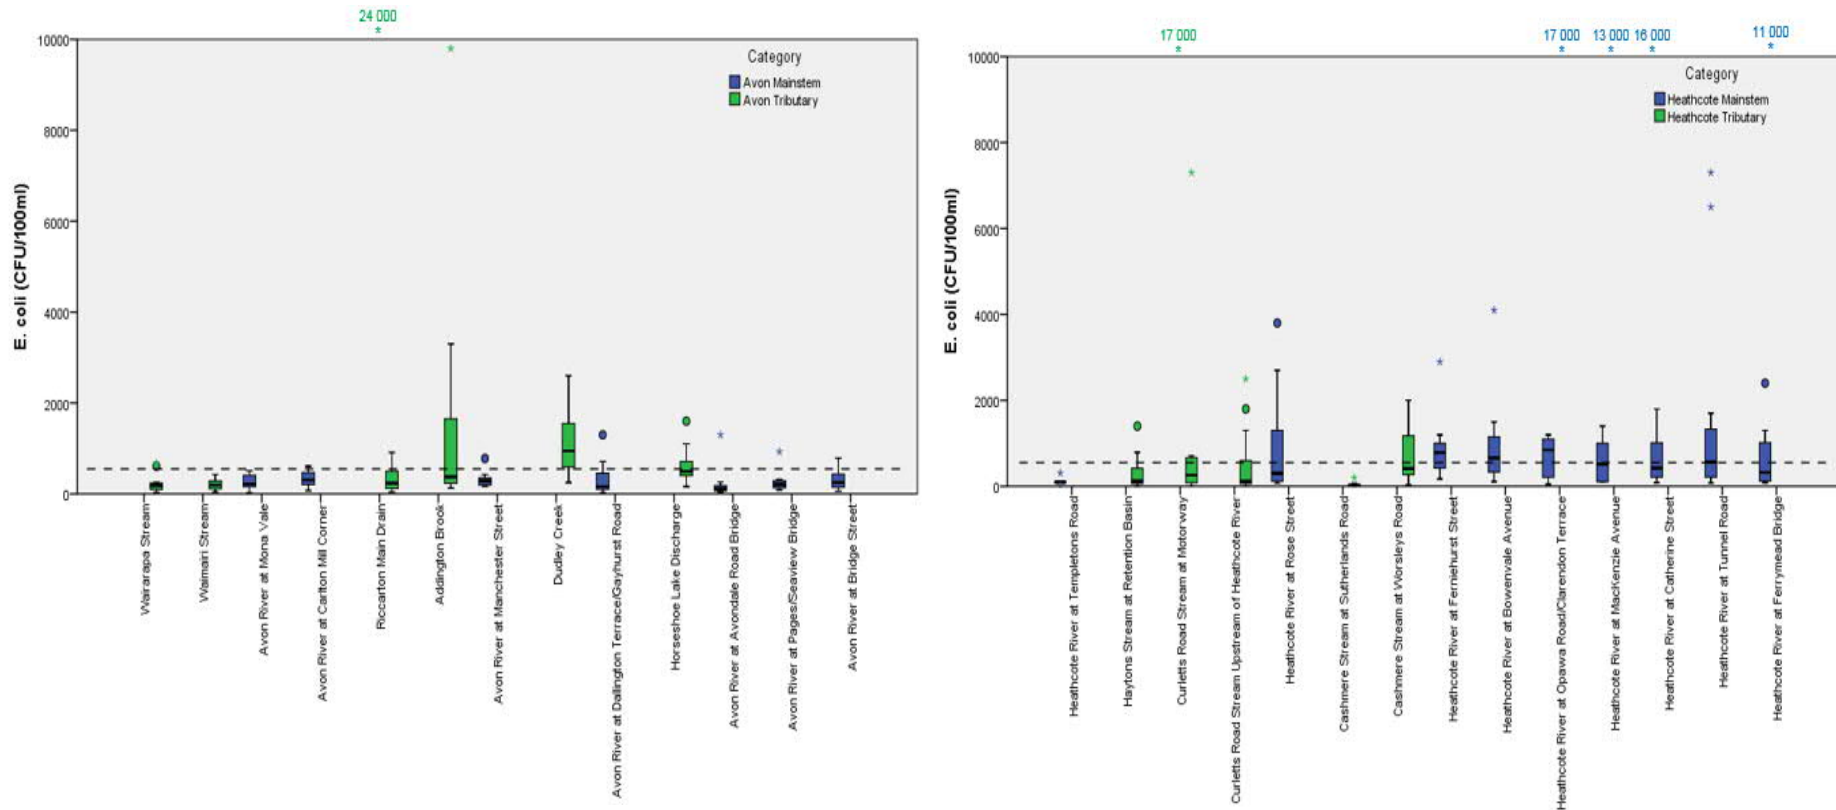


Figure xvii (a). *Escherichia coli* levels in water samples taken from the Ōtākaro/ Avon (left graph) and Ōpāwaho/ Heathcote (right graph) River sites, for the monitoring period January to December 2017. No monitoring was undertaken at the Heathcote River at Templetons Road site from January – July, as the site was dry. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger value of 550 CFU/100ml for 95% of samples for ‘spring-fed – plains – urban’ and ‘spring-fed – plains’ waterways (Environment Canterbury, 2017). The Laboratory Limit of Detection varied depending on the necessary dilution of the sample, but all were analysed as half this value to allow statistics to be undertaken.

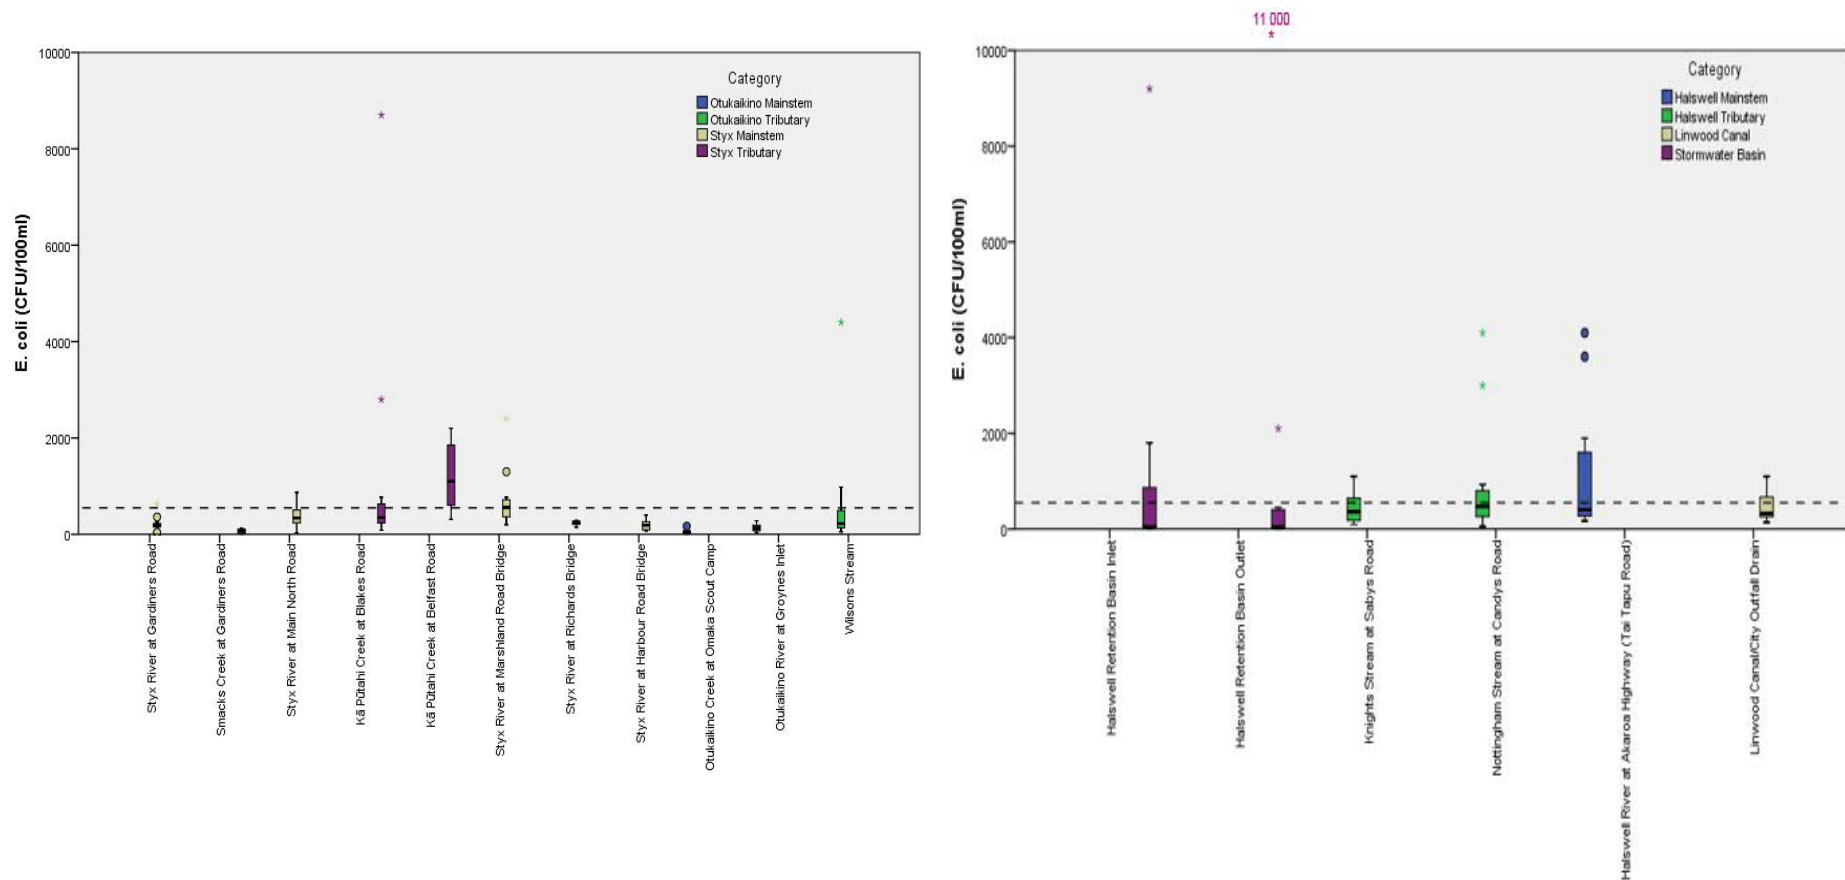


Figure xvii (b). *Escherichia coli* levels in water samples taken from the Pūharakekenui/ Styx and Ōtūkaikino River (left graph), and the Huritini/ Halswell River and Linwood Canal sites (right graph) for the monitoring period January to December 2017. No monitoring was undertaken at the Ōtūkaikino Creek at Omaka Scout Camp site from January - February and at the Styx River at Gardiners Road site in September, as there was no access to the site. Nottingham Stream at Candys Road was not sampled in February as there was not enough water to take a sample. Sites are ordered from upstream to downstream (left to right). The dashed lines represent the Land and Water Regional Plan trigger value of 550 CFU/100ml for 95% of samples for 'spring-fed – plains – urban' and 'spring-fed – plains' waterways (Environment Canterbury, 2017). The Laboratory Limit of Detection varied depending on the necessary dilution of the sample, but all were analysed as half this value to allow statistics to be undertaken.